ELECTRONIC WASHBASIN MIXER

AQUA130


PROTRONIC-S battery-supplied washbasin mixer with touch-free operation, DN 15, noise group I, with aerator and integrated flow control, for connection to hot and cold water supply, polished chromium-plated brass. With temperature selection lever and conversion set for concealed mixing device, 6 V battery.

ARTICLE NUMBER

| 7612982098918 | |
|---------------|--|
| | |
| | |
| | |

TECHNICAL DATA

| Type of sensor | opto-electronic sensor |
|------------------------------------|-------------------------|
| Type of tap | pillar tap |
| Material fitting | brass |
| Surface finish fitting | chromed |
| Gross weight | 2 kg |
| Type of operation | sensor operation |
| Type of mounting | mounted on product |
| Functional principle | electronic self-closing |
| Default automatic hygiene flushing | not activated |
| Type of mixing | with mixer |
| Thermal disinfection | no |
| Sound insulation | no |
| Spout projection | 102 mm |
| Diameter nominal | DN 15 |
| Calculation flow rate cold water | 0.070 liter per second |
| Calculation flow rate hot water | 0.070 liter per second |
| Default flow time | 60 seconds |
| Minimum flow pressure | 1.00 bar |
| Volume flow rate at 3 bar | 0.100 liter per second |
| Depressurised | no |
| Protective system IP | IP65 |
| Power supply connection | Battery 6 V |
| Protective shutdown | yes |
| Position of power connection | from bottom |
| | |

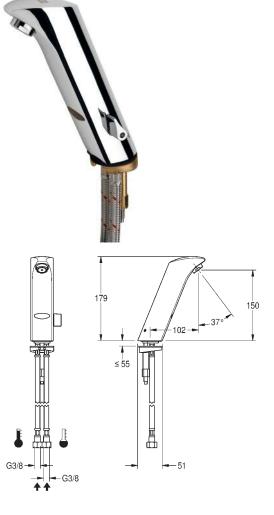

Franke Washroom Systems ws-info.int@franke.com www.franke.com

2014-12-09, Franke WS



WASHROOM SYSTEMS