

ELECTRONIC WASHBASIN MIXER

AQUA134


PROTRONIC-S mains-supplied washbasin mixer with touch-free operation, DN 15, noise group I, with aerator and integrated flow control, for connection to hot and cold water supply, polished chromium-plated brass. With temperature selection lever, conversion set for concealed mixing device and with power supply for installation in the wall, 230 V AC.

ARTICLE NUMBER

7612982162862

TECHNICAL DATA

Type of sensor	opto-electronic sensor
Type of tap	pillar tap
Material fitting	brass
Surface finish fitting	chromed
Gross weight	2.1 kg
Type of operation	sensor operation
Type of mounting	mounted on product
Functional principle	electronic self-closing
Default automatic hygiene flushing	not activated
Type of mixing	with mixer
Thermal disinfection	no
Sound insulation	1
Spout projection	102 mm
Diameter nominal	DN 15
Calculation flow rate cold water	0.070 liter per second
Calculation flow rate hot water	0.070 liter per second
Default flow time	60 seconds
Minimum flow pressure	1.00 bar
Volume flow rate at 3 bar	0.100 liter per second
Depressurised	no
Protective system IP	IP55
Power supply connection	230 V AC
Protective shutdown	yes
Position of power connection	from bottom

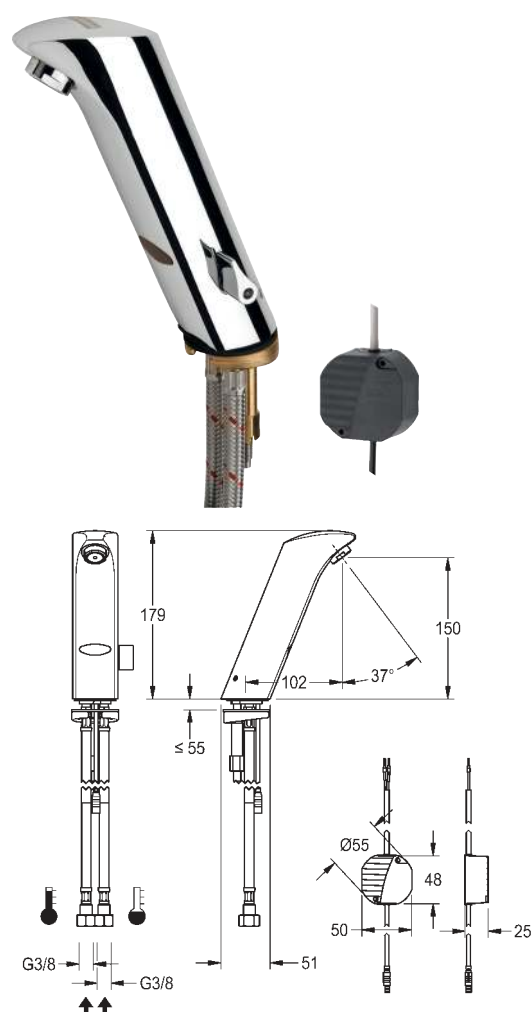

Franke Washroom Systems
ws-info.int@franke.com
www.franke.com

2014-12-09, Franke WS