
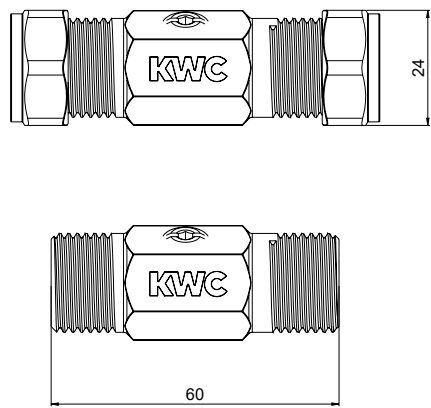


KWC

Restrictaflow inline restricting valve - 15mm - 2 l/min



AC17-042
Restrictaflow inline restricting valve

The restrictaflow valve is 15mm with internal 2 l/min flow regulator. Dual function, can also be used as an isolation valve for maintenance.

Technical data

Material
Gross weight
Type of fixing
Easy to unblock (if ever blocked)
Flow rates

Additional features

Can also be used as an isolating valve to aid maintenance
For use with ligature resistant basin spouts.

Chromium-plated brass
0.15kg
15mm compression
Simply reverse valve (half turn)
Regulated to 2lpm and pressures of 1 to 6 bar