



Restrictaflow inline restricting valve - 15mm - 2 l/min

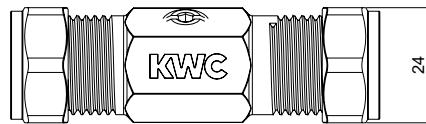

AC17-042

Restrictaflow inline restricting valve

The restrictaflow valve is 15mm with internal 2 l/min flow regulator.
Dual function, can also be used as an isolation valve for maintenance.

Technical data

Material	Chromium-plated brass
Gross weight	0.15kg
Type of fixing	15mm compression
Easy to unblock (if ever blocked)	Simply reverse valve (half turn)
Flow rates	Regulated to 2lpm and pressures of 1 to 6 bar

Additional features

Can also be used as an isolating valve to aid maintenance

For use with ligature resistant basin spouts.