


## AQUARIUS A45 DOC M Polished with PEX hose

Model line: AQUARIUS | **AT03-023**

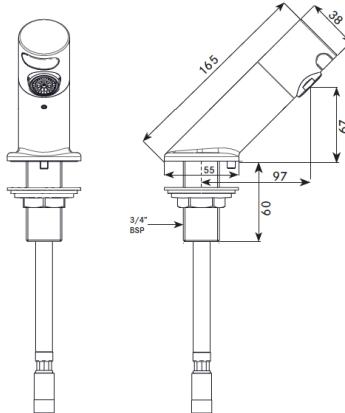

### **AT03-023**

Aquarius A45 DOC M Polished with PEX hose

The Aquarius range incorporate simple and modern design, with the latest electronic functionality. Sensor operated for maximum hygiene and efficiency. 5 litres per minute integrated flow control. (Standard 5LPM, Other flow rates available) Automatic purge function, Sensor range adjustment, Wave on/wave off function, Anti Vandal and Lock Out functions, Chlorination function.

Single mixed feed connection by PEX lined hose (15mm connection). External TMV required. Polished finish. Requires a Station kit to operate. Station kits available in Single Station Battery or Mains Single Station, 2 Station or 3 Station for multiple connections. Refer to Station kit

### Technical data

|                              |   |
|------------------------------|---|
| Material                     | 316 Stainless Steel   |
| Gross weight                 | 1.1 kg  |
| Type of tap                  | Aquarius A45  |
| Type of mounting             | Deck mounted  |
| Surface finish               | Polished  |
| Type of operation            | No Touch Sensor   |
| Type of mixing               | Additional TMV may be required  |
| Automatic purge              | Yes* - Default: OFF/Options: 3, 6, 12, 24, 36 & 48 hours  |
| Purge run time               | Default 1 min/ Options: OFF, 30 secs, 1, 2, 4 & 8 mins  |
| Spout projection             | 97mm  |
| Minimum flow pressure        | 1.00 bar (Lower pressure station kits available)  |
| Volume flow rate at 3 bar    | 5LPM (Other flow rates available)   |
| Adjustable run time          | Yes* - Default: 2 secs/ Options: 2, 5, 10, 15, 20, 30 secs  |
| Water connection             | 15mm PEX hose   |
| Anti-Vandal function         | Yes   |
| Lock out function            | Default OFF/ Options: OFF, 4, 6, 8 & 10 operations  |
| Chlorination function        | Yes* - Default 2 mins/ Options: 1, 2, 3, 4, 5, 10, 20 & 30 mins                                   |
| Battery or mains station kit | Single Battery: AT00-001<br>Single Mains: AT00-002<br>- Other options available. Contact KWC DVS. |
| Working pressure             | 1-10 Bar (For Low / High pressure, Contact KWC DVS.)  |
| Max working temperature      | 60°C  |
| Fixing                       | 3/4" BSP  |
| Fixing length                | Up to 50mm with flange nut  |