


## KWC

### Tap control system - 1 station kit - tactile

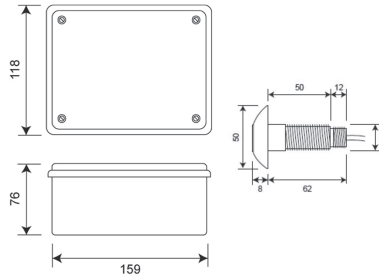

#### AT07-012

Tap control system - 1 station kit - tactile

Single station tap control system kit complete with tactile sensors. Designed to be wall-mounted. Mains operated 230V. Ability to control valves for 1 or 2 spouts or hot and cold valves for single spout. Manually adjustable setting options include run on times, hygiene purges and lock-outs.

Kit includes:

AT07-001 Tap control system for 1 or 2 taps  
 AC17-101 Anti-microbial plastic valve 12v DC  
 AC02-046 Tactile switch with 50mmø stainless bezel & blue insert  
 AC02-047 Tactile switch with 50mmø stainless bezel & red insert

#### Technical data

Material	ABS
Gross weight	0.7kg
Type of mounting	Wall mounted
Power source	Mains
Voltage	230V a.c.
Sensor voltage	5V DC
Valve voltage	12V DC
Valve power	3W normally closed
Control inputs	Sensor 1, sensor 2
Control outputs	Valve 1, valve 2
Control configuration	Controls valves for 1 or 2 spouts, or hot and cold valves for single spout
Operation type	Wave-on or tactile sensor (sold separately)
IP rating	54
Current	0.055A
Frequency	50Hz

#### Settings

Adjustable timing	6 - 20 secs (Default 6 secs)
Purge facility	Yes (ON / OFF) Default OFF
Operations lock out	Yes (ON / OFF)

#### Kit contents

AT07-001	Tap control system for 1 or 2 taps
AC17-101	Anti-microbial 12V DC normally closed solenoid valve
AC02-047	Tactile switch with 50mmø stainless steel bezel & red insert