

TEMPERATURE BLENDING VALVE ADJUSTER

Model line: SHOWER VALVES



SH00-012  
TEMPERATURE BLENDING VALVE ADJUSTER

In many public areas supplying water at 41°C is sufficient. If however, the requirement is to provide 41°C with user adjustment between this temperature and cold (determined by the cold input temperature), The temperature blending valve adjuster can be used to accommodate this facility.


The blender adjuster is Ligature Resistant and Anti-Tamper with Robust Construction whilst retaining an Aesthetically pleasing design.

Technical data

Material	Body:	Chrome Plated Brass
	Fittings:	DZR Brass
Surface Finish		Chromed Finish
Weight		1.1 kg
Wall thickness compatibility		22mm - 180mm
Type of operation		Manual
Water connection		Brass 1/2" BSP connection

Recommendations:

It is strongly recommended to install a thermostatic mixing valve prior to blender valve installation.

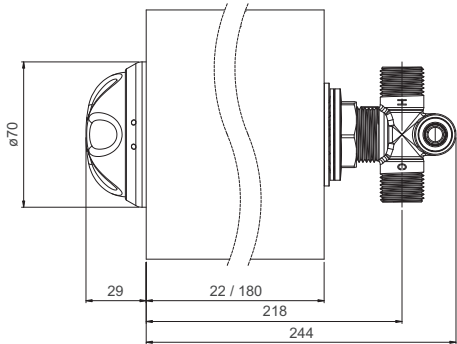

ALL DIMENSIONS IN MM  
UNLESS STATED OTHERWISE