


## KWC

### Shower tower

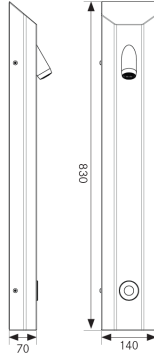

#### SH01-002

Shower tower

Standard angled top shower tower, suitable for high security applications. Concealed pipework, ligature resistant. Set temperature. Electronic wave-on sensor operation.

#### Technical data

Material	316 stainless steel
Surface finish	Brushed
Gross weight	5.2kg
Type of operation	Sensor
Type of mounting	Wall mounted
Type of mixing	External TMV maybe required
Failsafe close	Yes
Water connection	15mm rear entry
Minimum flow pressure	1 bar
Adjustable run time	Yes* Default - 1 min Options: 30 secs, 1, 2, 3, 4 & 5 mins
Adjustable range	Yes* Default - 2 Options: 1, 2 & 3 (10mm - 75mm)
Wave-on & Wave-off	Default - OFF* Options: ON or OFF
Anti-vandal function	Yes* Default - OFF Options: 3, 6, 12, 24, 36 & 48 hours
Purge run time	Default - 1min* Options: 30 secs, 1, 2, 4 & 8 mins
Lock outs	Default - OFF* Options: 4, 6, 8 & 10 ops
Power source	Mains or battery