

## FLUSHMATIC SURFACE MOUNT KIT - WHITE - BATTERY

Model line: WC & URINAL FLUSHING



### UC01-005

FLUSHMATIC SURFACE MOUNT KIT - WHITE - BATTERY

The Flushmatic Urinal Control is used for multiple station urinals and can be surface mounted to wall or ceiling.

The system uses a passive infrared (PIR) detector to detect movement within the sensing area, switching the unit into a timing mode.

The systems fast fill design helps eliminate scale problems associated with slow or drip fed systems.


For programming and adjustable parameters please refer to the relevant Installation & Operating Instructions available on [www.dartvalley.co.uk](http://www.dartvalley.co.uk)

### Technical data

Material	ABS
Gross Weight	0.65 kg
Type of mounting	Surface mounted (to wall or ceiling)
Power source	Battery
Voltage	6v DC
Valve voltage	6v DC
Valve power	6W Latching
Operation type	Passive infra red sensor
IP rating	IP 54
Current	30 - 40 ua Standby

### Settings

Flush delay time	1, 2, 4 & 8 minutes
Valve open time	15 & 30 seconds, 1, 2, 4 & 8 minutes
Janitorial flush	Yes (After 12 hours of non use)

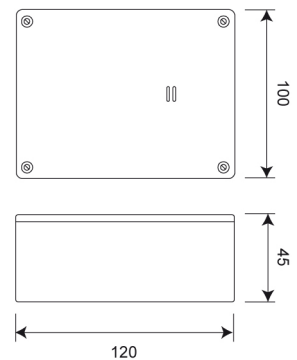

**ALL DIMENSIONS IN MM  
UNLESS STATED OTHERWISE**