

FLUSHMATIC DOWNLIGHTER KIT

Battery

UC01-018

The Flushmatic urinal control is used for multiple station urinals and can be surface or ceiling mounted. This works by using a passive infrared (PIR) detector which detects movement within the sensing area, switching the unit into a timing mode. After a pre-set time, the solenoid valve opens allowing water to flow into the cistern activating the flushing cycle.

PRODUCT NUMBER


UC01-018	Flushmatic Downlighter Kit (battery)
----------	--------------------------------------

TECHNICAL DATA

Material	ABS
Gross Weight	0.63 kg
Type of mounting	Ceiling mounted
Power source	Battery
Voltage	6v
Valve voltage	6v DC
Valve power	6W Latching
Operation type	Passive infra red sensor
Current	30 - 40ua Standby

SETTINGS

For all settings, please refer to "Flushmatic Urinal Flush Controller" instructions, available on www.dartvalley.co.uk.

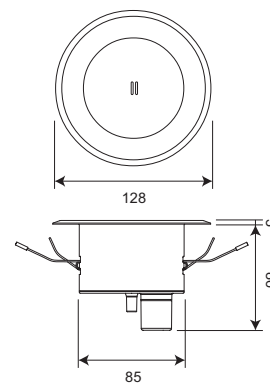

ALL DIMENSIONS IN MM

Last Updated: 2021-03-16, Dart Valley Systems