


KWC

Pearl Solo downlighter kit for suspended ceilings in white

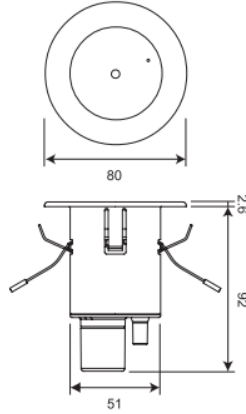

UC01-027

Pearl Solo downlighter kit - mains

The ceiling mounted Pearl Solo Flushmatic urinal control is used for multiple station urinals. This works by using a passive infrared (PIR) detector which detects movement within the sensing area, switching the unit into a timing mode. After a pre-set time, the solenoid valve opens allowing water to flow into the cistern activating the flushing cycle. The flush time can be customised by the user turning the rotary switch on the Flushmatic board.

Technical data

Material	ABS
Gross weight	0.60kg
Type of mounting	Ceiling mounted
Power source	Mains
Voltage	240V
Valve voltage	6V DC
Valve power	6W latching
Operation type	Passive infrared sensor
Current	30 - 40ua standby

Settings

Flush time	1, 2, 3, 4, 5, 6, 7, 8, 9 Seconds
------------	-----------------------------------