


KWC

Standard WC flushvalve kit with wave-on sensor

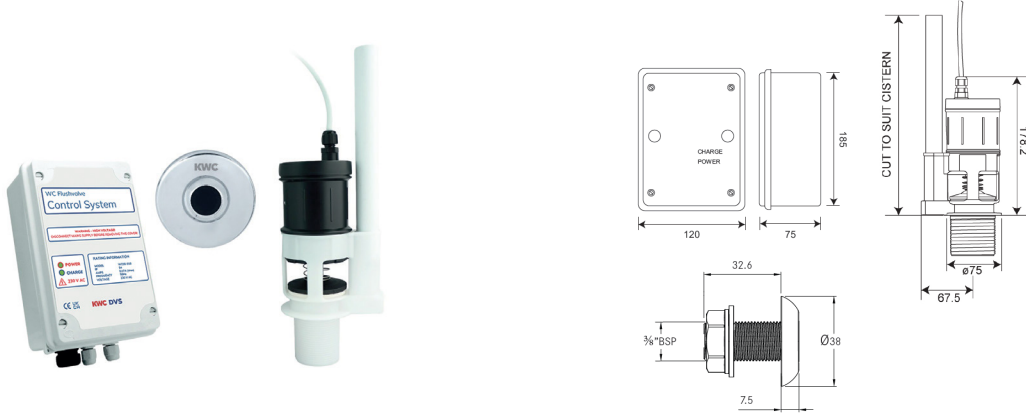

WC03-002

Flushvalve kit 1 1/2" base

The KWC DVS no-touch WC flushing system is an electronically operated drop valve which replaces the traditional syphon and delivers a WRAS Approved 4L single flush from the cistern to the lavatory bowl.

Technical data - Flushvalve

| | |
|----------------------|------------------------------------|
| Weight | 1.05kg |
| Material | ABS plastic |
| Power supply | Through WC control box |
| Fixing size | Ø1½" standard |
| Internal overflow | Yes |
| Type of operation | Sensor operation or tactile button |
| Type of mounting | WC flushvalve |
| Functional principle | Electronic self-closing |
| Failsafe close | Yes |

Technical data - Control box

| | |
|--------------|---------------------|
| Weight | 1kg |
| Material | ABS plastic |
| Run times | 0.25 - 6.75 seconds |
| Power source | 230V a.c. |
| IP rating | 54 |
| Amps | 0.07A (MAX) |
| Voltage | 230V a.c. |
| Frequency | 50Hz |

Technical data - Wave-on sensor

| | |
|---------------------|---|
| Material | Chromium-plated brass |
| Surface finish | Polished |
| Gross weight | 0.2kg |
| Overall diameter | 3/8 Ø BSP |
| Thread diameter | Ø16.66mm (3/8" BSP) |
| Type of mounting | Wall mounted (Ø18mm drill hole required) |
| Operation type | A.I.R (active infrared) touch-free |
| Cable length | 3m |
| Adjustable settings | Dictated by control box or programmable sensor & remote |