


SINGLE-LEVER PILLAR MIXER

F5LM1003 | 2030031701

PRODUCT GROUP (PG) : **Taps** | ARTICLE FAMILY (AF) : **Manual tap** | ARTICLE GROUP (AG) : **F5LM1003 ++** | MODEL RANGE : **F5** | LIFECYCLE : **New**

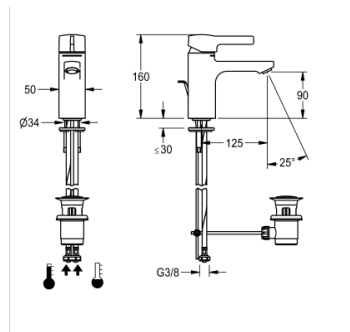

F5L-Mix single-lever mixer as pillar mixer DN 15 for sanitary facilities. Mixing cartridge with ceramic disc technology and thermostatic protection from scalding, permanently set to 41 °C and with safety switch-off in the event of failure of the cold water supply. For connection to hot water and cold water via hoses, includes strainers. All-metal construction, high-polished chromium-plated brass. Anti-theft aerator, SLIM design, with integrated flow rate regulator 5.0 l/min, projection 125 mm. With pop-up waste set G 1 1/4, chromium-plated.

TECHNICAL DATA


Gross Weight	1.90 kg
Net Weight	1.81 kg
Functional Principle	MANUAL-C
Type Of Mixing	THERMOSTAT-MIXER
Type Of Mounting	TAPHOLE
Type Of Tap	PILLAR-TAB
Calculation Flow Rate Cold Water	0.07 liter per seconds
Calculation Flow Rate Hot Water	0.07 liter per seconds
Depressurised	NO
Diameter Nominal	DN-15-1-2INH
Material Fitting	BRASS
Minimum Flow Pressure	1.00 bar
Protective Shutdown	NO
Sound Insulation	NO
Spout Projection	125.00 mm
Surface Finish Fitting	CHROMISED
Thermal Disinfection	NO
Type Of Operation	MANUAL-OPERATION
Volume Flow Rate At 3 Bar	0.08 liter per seconds
Inlet Size	G3-8

SINGLE-LEVER PILLAR MIXER

F5LM1003 | 2030031701

PRODUCT GROUP (PG) : **Taps** | ARTICLE FAMILY (AF) : **Manual tap** | ARTICLE GROUP (AG) : **F5LM1003 ++** | MODEL RANGE : **F5** | LIFECYCLE : **New**

ACCESSORIES



TWIST-PROOF SET

2030041324
