


## Self-closing straight way valve

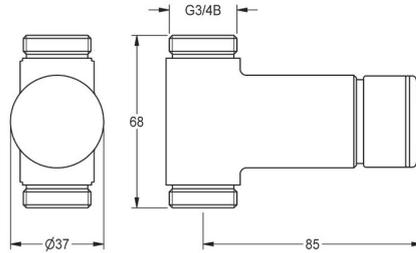

### F3SV2002

Self-closing straight way valve

F3S self-closing straight-way valve DN 15 for surface mounting for shower facilities. Self-closing functional part, hydraulically controlled, piston-free design, self-closing, stepless adjustment of flow duration. For connection to pre-mixed hot water or cold water. Housing including changeable valve seat, with external thread G 3/4 B, high-polished chromium-plated brass.

#### Technical data

Gross weight	0.57kg
Net weight	0.5kg
Functional principle	Hydraulic-C
Type of mixing	No
Type of mounting	Pipe mounting
Type of shower	Wall fitting
Additional connections	No
Calculation flow rate cold water	0.15 litre per seconds
Circulation	No
Connection with pay water dispenser	Not possible
Adjustable flow time	Yes
Diameter nominal	DN 15
Material fitting	Brass
Maximum flow time	35 seconds
Minimum flow pressure	1 bar
Minimum flow time	5 seconds
Protective shutdown	No
Shower pipe draining	No
Sound insulation	No
Surface finish fitting	Chromium-plated brass
Thermal disinfection	No
Type of operation	Manual operation
Volume flow rate at 3 bar	0.2 litre per second
Position of water connection	Bottom

## Self-closing straight way valve

### Consumables



### Consumables

---

**ESH0W0001**  
Functional part

---