


Self-closing straight-way valve

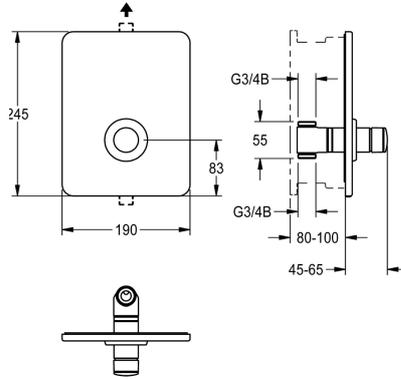

F3SV2005

Self-closing straight-way valve

F3S self-closing straight-way valve DN 15 as finished installation kit for installation in basic installation kit, for shower facilities. Self-closing functional part, hydraulically controlled, piston-free design, self-closing, stepless adjustment of flow duration. For connection to pre-mixed hot water or cold water. Housing including changeable valve seat, visible parts, high-polished chromium-plated brass.

Holding frame including profile seal, stainless steel cover plate 190 x 245 mm with covered screw fixing and rosette. Depth adjustability 20 mm.

Technical data

Gross weight	1.5kg
Net weight	1.3kg
Functional principle	Hydraulic-C
Type of mounting	In-wall installation with box
Type of shower	In-wall fitting
Additional connections	No
Calculation flow rate cold water	0.15 litre per seconds
Circulation	No
Adjustable flow time	Yes
Diameter nominal	DN 15
Material casing	Stainless steel
Material fitting	Brass
Maximum flow time	35s
Minimum flow pressure	1 bar
Minimum flow time	5s
Protective shutdown	No
Shower pipe draining	No
Sound insulation	No
Surface finish casing	Satin finish
Surface finish fitting	Chrome
Thermal disinfection	No
Type of operation	Manual operation