


DELABIE | DVS

Electronic pillar mixer with battery operation

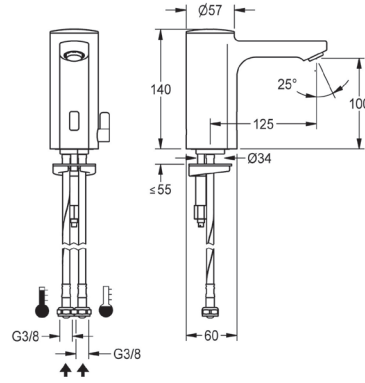

F5EM1001

Electronic pillar mixer

F5E-Mix pillar mixer DN 15 for sanitary facilities, opto-electronically controlled. For connection to hot and cold water via hoses with integrated backflow preventer and strainers. Control electronics, solenoid valve cartridge, 6V lithium battery (CR-P2) and sensor in all-metal housing, high-polished chromium-plated brass. Temperature lever with adjustable, turn-proof temperature stop as well as conversion set for concealed mixing device.

Technical data

Functional principle

Default automatic hygiene flush

Depressurised

With filter

Functional principle

Diameter nominal

Inlet size

Locking mechanism

Material fitting

Minimum flow pressure

Number of batteries

Power supply connection

Type of power supply

Protective shut down

Spout projection

Surface finish fitting

Surface treatment fitting

Type of batteries

Type of mounting

Type of operation

Type of tap

Water connection

Accent colour

Anti-theft aerator, design SLIM, with integrated flow regulator 5.0 l/min. Activated water hygiene flushing 24 hours after last activation, safety switch-off with continuous reflection and saving of statistical data. With option for parameterisation and communication via optional, bidirectional remote control.

Electronic self-closing

24 hour after the last activity

No

Yes

Electronic self-closing

DN 15

G 3/8

Top section, non ceramic

Brass

1 bar

1

Battery 6V

Battery

Yes

125mm

Chromed

Polished

CR-P2 Lithium battery 6V

Tap hole

Sensor operation

Pillar tap

Hose (gland nut)

None