


F5S-Mix self-closing in-wall mixer

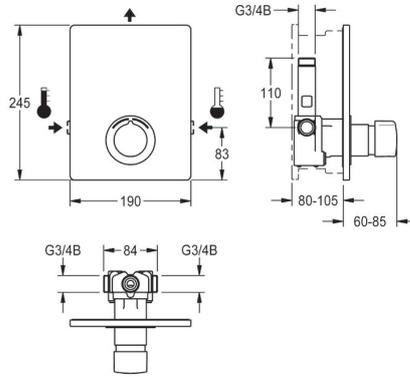

F5SM2004

Self-closing in-wall mixer

F5S-Mix self-closing single-mixer DN 15 as finished installation kit for installation in basic installation kit, for shower facilities. FRAMIC self-closing mixing cartridge, hydraulically controlled, low-maintenance and stagnation-free, with ceramic disc technology, self-closing, flow pressure-independent due to medium-separated design. Stepless adjustment of flow duration.

With adjustable, turn-proof temperature stop. Connects to hot and cold water. All-metal construction, visible parts high-polished, chromium-plated.

Technical data

Tailor made	No
Type of operation	Manual operation
Diameter nominal	DN 15
Material casing	Stainless steel
Material fitting	Brass
Type of mixing	With mixing
Sound insulation	No
Surface finish fitting	Chromium-plated brass
Minimum flow pressure	0.5 bar
Volume flow rate at 3 bar	0.2 litre per second
Adjustable flow time	Yes
Functional principle	Hydraulic self-closing
Protective shutdown	No
Thermal disinfection	No
Additional connections	No
Circulation	No
Connection with pay water dispenser	Not possible
Shower pipe draining	No
Type of shower	In-wall fitting
Position of water connection	From side
Surface finish casing	Satin finished
Maximum flow time	35 seconds
Minimum flow time	5 seconds
Hygiene flushing	No

Self-closing straight way valve

Mandatory accessories



Mandatory accessories

F5BX2001

System box for in-wall mixer
