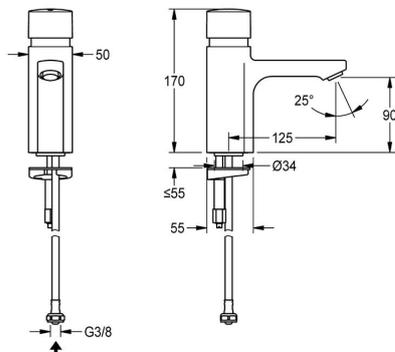# DELABIE | DVS

Self-closing pillar tap

F5SV1001
Self-closing pillar tap

F5S self-closing pillar tap DN 15 for sanitary facilities. FRAMIC self-closing cartridge, hydraulically controlled, low-maintenance and stagnation-free, with ceramic disc technology, self-closing, flow pressure-independent due to medium-separated design. Stepless adjustment of flow duration. For connection to pre-mixed hot water or cold water via hose including strainer seal.

All-metal construction,high-polished chromium-plated brass. Anti-theft aerator, SLIM design, with integrated flow regulator 5.0 l/min.

Technical data

With backflow preventer	No
Calculation flow rate cold water	0.15l/s
Depressurised	No
With filter	Yes
Adjustable flow time	Yes
Functional principle	Hydraulic self-closing
Hygiene flushing	No
Diameter nominal	DN 15
Inlet size	G 3/8
Locking mechansim	Top section, ceramic
Material fitting	Chromium-plated brass
Max flow time	35 seconds
Minimum flow pressure	0.5 bar
Minimum flow time	5 seconds
Type of mixing	No
Pop-up waste set	No
With rosettes / cover plate	No
Protective shutdown	No
Sound insulation	No
Spout	Fixed
Spout projection	125mm
Surface finish fitting	Chrome
Surface treatment fitting	Polished
Temperature limit	No
Thermal disinfection	No
Type of mounting	Tap hole
Type of operation	Manual operation
Type of tap	Pillar tap

DELABIE | DVS

Self-closing pillar tap

Technical data

Volume flow rate at 3 bar	0.08 l/s
Water connection	Hose (gland nut)
Accent colour	None
Basic colour	Chrome (glossy)

Optional accessories

Optional accessories

ACSX1001
Socket for increasing the tap body
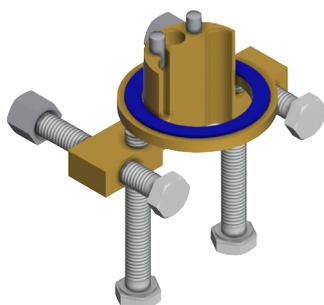
Optional accessories

ACXX1001
Anti-twist protection

Optional accessories

ACXX1002
5.0l/min aerator, angle-adjustable

Optional accessories

PURE0031
PURETHERM under-table thermostat

Optional accessories

ASXX1008
3.0l/min aerator

Consumables

Consumables

ASSX9004
Plug chtromed

Consumables

ASSX9003
Safety ring

Consumables

ASSX9001
FRAMIC self-closing cartridge

Consumables

ACXX1003
Mounting key