


Thermal disinfection valve

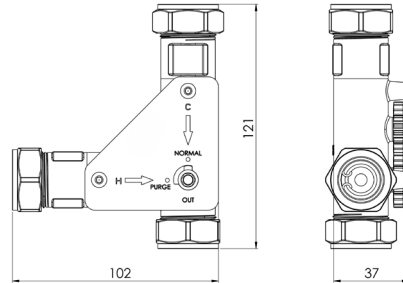

AC17-080

Thermal disinfection valve

The thermal disinfection valve has been designed to eliminate biofilm, reducing the risk of waterborne pathogens. This valve is suitable for any washroom equipment fitted with a TMV which requires thermal disinfection.

Technical data

Weight	0.7kg
Body material	DZR brass
Compatible pipe work size	22mm - also compatible with 15mm pipework when used with 15mm reducers (sold separately 3x required)
Normal / thermal disinfection operation	Quarter turn via allen key
Operating pressure	1-10 bar

Additional information

- Integral non-return valves prevent backflow
- Construction uses WRAS approved materials