


12V DC Anti-microbial valve

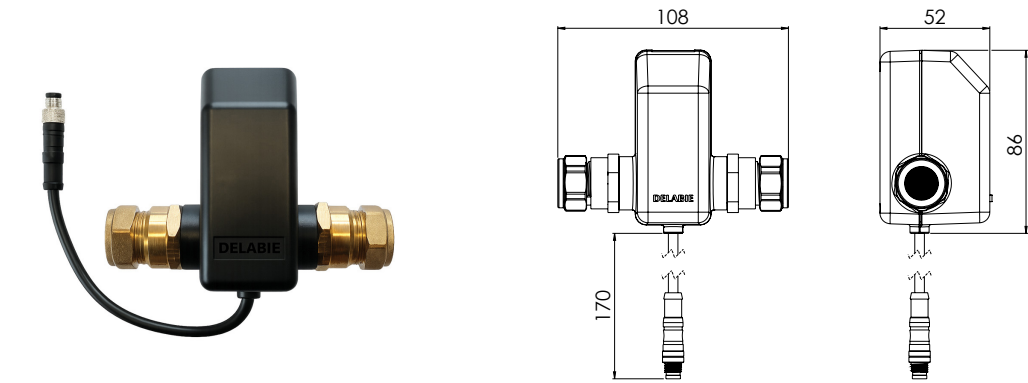

AC17-101

12V DC Anti-microbial valve

12 Volt DC Normally Closed servo valve with all wetted parts being anti-microbial Biomaster protected. Compression fittings for 15mm pipe.

Technical data (shower head)

Gross weight	0.2kg
Material	Plastic with Biomaster protection
Diaphragm material	Silicone with Biomaster protection
Voltage	12V DC
Power	2.3W
Working temperature range	0°C to 90°C
Max. working pressure	10 bar: static
Min. working pressure	1 bar
Connection	15mm compression fitting
Latching pulse	3 min ON, 5 min OFF
Pressure rating	10 bar
Operation type	Normally closed (servo)
Electrical connection	M8 2 core extension cable (see below)
Cable length (determined by mandatory accessory extension cable)	3m (AT00-146) , 15m (AT00-177)

Flow rate SV118/D 12V DC:

