


Lever action pillar taps

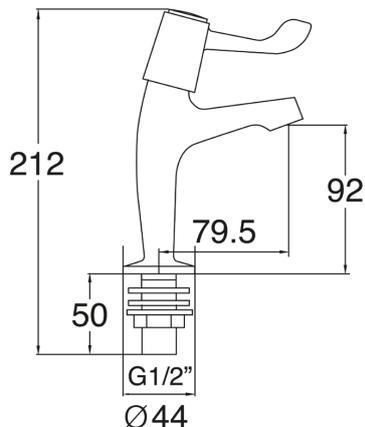

F1330N

Lever action pillar taps

Lever action pillar taps for connecting to hot and cold water.
Manufactured from chromium plated brass.

Technical data

Calculation flow rate cold water	0.2 litre per second
Calculation flow rate hot water	0.2 litre per second
Gross weight	1.03kg
Diameter nominal	DN 10
Minimum flow pressure	0.2 bar
Type of mixing	No mixing
Overall depth	93mm
Overall height	165mm
Overall width	50mm
Sound insulation	No
Spout projection	95mm
Surface material	Chrome
Type of fitting	Pillar tap
Volume flow rate at 3 bar	0.2 litre per second
Net weight	0.89kg