Heavy duty floor standing WC pan

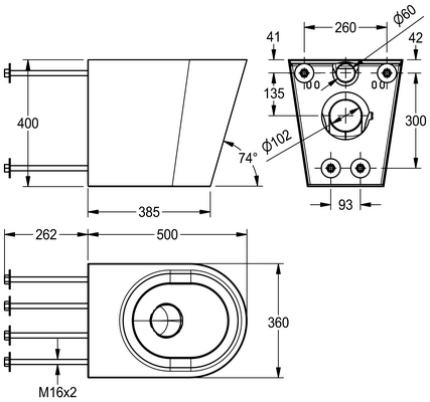

HDTX597

Floor standing WC pan

Campus floor standing WC pan for fitting through duct wall, manufactured from grade 1.4301 (304) stainless steel, material thickness 1.5mm for the pan and shroud – satin polish finish. The WC incorporates a stainless steel P trap 102mm o/d. A separate mounting plate and 4 bolts are provided for mounting the WC through a duct wall. The Campus WC has a pressed seating area that does not require a separate seat in vandal prone installations.

However, a seat and lid can be fitted. Approval: Complies with BS EN 997 for 4.5 litre flushing. Also complies with the Australian and German test standards.

Technical data

Gross weight	21.5kg
Inlet size	DN 55
Material	Stainless steel
Material code	1.4301 chrome nickel steel V2A
Material thickness	1.5mm
Minimum flushing capacity	4 litre
Net weight	19.1kg
Outlet size	DN 100
Overall depth	500mm
Overall height	400mm
Overall width	360mm
Surface finish	Satin finished
Type of mounting	Bolt fix with duct wall
Type of toilet seat	No toilet seat
Type of WC	Floor standing