


# ELECTRONIC WASHBASIN TAP: AQUA131

AQUA131 | 2000067774

PRODUCT GROUP : Taps | ARTICLE GROUP : AQUA131 | ARTICLE FAMILY : Electronic taps | MODEL RANGE : AQUA

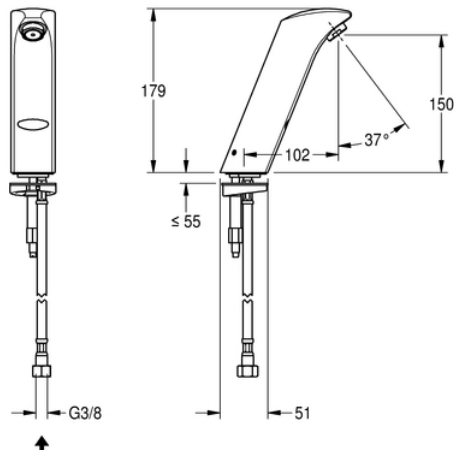

PROTRONIC-S battery-supplied washbasin tap with touch-free operation, DN 15 with aerator and integrated flow control, for connection to pre-mixed warm or cold water supply, polished chromium-plated brass, 6 V battery. WRAS approved.

## TECHNICAL DATA

calculation flow rate cold water	0.10 liter per second
default automatic hygiene flushing	not activated
default flow time	60.00 seconds
depressurised	no
functional principle	electronic self-closing
gross weight	1.88 kg
diameter nominal	DN 15
material fitting	brass
minimum flow pressure	1.00 bar
type of mixing	no mixing
net weight	1.62 kg
power supply connection	Battery 6 V
position of power connection	from bottom
protective system IP	IP65
protective shutdown	yes
sound insulation	no
spout projection	102.00 mm
surface finish fitting	chromed
surface material	chrome
thermal disinfection	no
type of fitting	pillar tap
type of mounting	mounted on product
type of operation	sensor operation
type of sensor	opto-electronic sensor

type of tap	pillar tap
volume flow rate at 3 bar	0.10 liter per second

# ELECTRONIC WASHBASIN TAP: AQUA131

AQUA131 | 2000067774

PRODUCT GROUP : **Taps** | ARTICLE GROUP : **AQUA131** | ARTICLE FAMILY : **Electronic taps** | MODEL RANGE : **AQUA**

---

## SIMILAR PART

---



---

**ELECTRONIC WASHBASIN  
TAP: AQUA135**

---

2000102697

---