


# F5L Mix stainless steel shower panel

MODEL RANGE: F5 | F5LM2020 | 210.0590.342

Showers | Manual shower

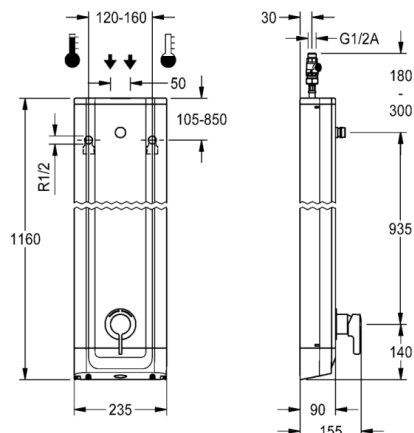

F5L Mix shower panel made of stainless steel for wall mounting with DN 15 single lever mixer and connecting nozzles for the shower head. For connection to hot and cold water. Shower valve with integrated mixing cartridge and pre-assembled hygiene unit including sensor with control electronics to perform automatic water hygiene flushing, program-controlled thermal disinfection (additional bypass solenoid-operated flush valve cartridge required) and storage of statistical data. Mixing cartridge with ceramic disc technology and thermostatic protection from scalding which is permanently set to 43 °C, and with safety switch-off in the event of a failure in the cold water supply. All-metal construction, visible parts high-polished or chrome-plated. Connecting nozzles for the required additional DN 15 Franke shower head with pre-fitted flow regulator 9.0 l/min. Housing made of stainless steel with raised function surface and plastic cover caps. Connecting hoses with lockable water volume control with backflow preventer and strainer. Activated water hygiene flushing at fixed intervals of 24 hours. With option for parameterization and communication via the optional bidirectional remote control. Optional hygiene unit for battery operation with 6 V lithium battery (CR-P2) per fitting or separate power supply via plug-in power supply unit 6.75 V/12 V DC.

Dimensions of housing 235 x 1160 x 90 mm (W x H x D)

Shower head and battery compartment including battery or plug-in power supply unit with extension cable to be ordered separately.

Technical data	
Overall depth	90.00 mm
Overall height	1,160.00 mm
Overall width	235.00 mm
Tailor made	No
Type of mounting	Wall mounting
Type of operation	Manual operation
Diameter nominal	DN 15
Inlet size	G-1-2-A
Material casing	Stainless steel
Material fitting	Brass
Type of mixing	With thermostat / mixer
Sound insulation	No
Surface finish fitting	Chromed
Minimum flow pressure	1.50 bar
Volume flow rate at 3 bar	0.15 liter per second
Adjustable flow time	No
Functional principle	Manual
Protective shutdown	No
Thermal disinfection	Prepared for automatic thermal disinfection
Default automatic hygiene flushing	Fixed interval 24 hours
Power supply connection	6-12-VDC
Type of sensor	Opto-electronic sensor
Position of power connection	Top backside
Additional connections	Yes
Circulation	No
Connection with pay water dispenser	Not possible
Shower pipe draining	No
Type of shower	Shower panel



NEW

**FRANKE**

Additional information: [ws-info.uk@franke.com](mailto:ws-info.uk@franke.com) | [www.franke.com](http://www.franke.com) | 2020-11-06

# F5L Mix stainless steel shower panel

MODEL RANGE: F5 | F5LM2020 | 210.0590.342

Showers | Manual shower

## Accessory Mandatory



AQUAJET-Slimline shower head for F5 shower panels

2030054255

SHAS0011

AQUAJET-Comfort shower head for F5 shower panels

2030054254

SHAC0011

MÜNCHEN shower head for F5 shower panels

2030054793

SHMU0011



Battery compartment

2000109466

ZAQCT0003

## Accessory Optional



Solenoid valve cartridge

2030003033

EAQFU0001



Bidirectional remote control for electronic fittings F3 and F5

2030036654

ACEX9005



2-button remote control for fittings F3 and F5

2030036849

ACEX9004

## Spare Parts



Solenoid valve cartridge

2030003033

EAQFU0001