


# F5L Mix stainless steel shower panel with hand shower fitting

MODEL RANGE: F5 | F5LM2021 | 210.0590.344

Showers | Manual shower

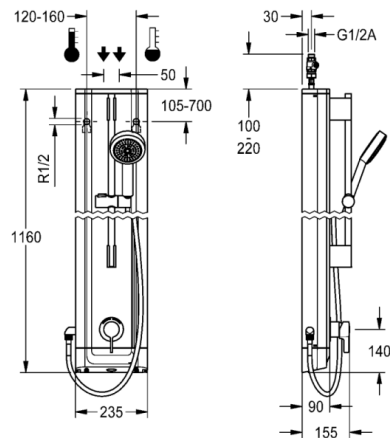

F5L Mix shower panel made of stainless steel for wall mounting with DN 15 single lever mixer and a hand shower fitting. For connection to hot and cold water. Shower valve with integrated mixing cartridge and pre-assembled hygiene unit including sensor with control electronics to perform automatic water hygiene flushing, program-controlled thermal disinfection (additional bypass solenoid-operated flush valve cartridge required) and storage of statistical data. Mixing cartridge with ceramic disc technology and thermostatic protection from scalding which is permanently set to 43 °C, and with safety switch-off in the event of a failure in the cold water supply. All-metal construction, visible parts high-polished or chrome-plated. Pre-fitted chrome-plated brass shower pole with height-adjustable hand shower holder and chrome-plated brass hand shower, shower head with rain jet, diameter 110 mm, shower hose 900 mm. Housing made of stainless steel with raised function surface and plastic cover caps. Connecting hoses with lockable water volume control with backflow preventer and strainer. Activated water hygiene flushing at fixed intervals of 24 hours. With option for parameterization and communication via the optional bidirectional remote control. Optional hygiene unit for battery operation with 6 V lithium battery (CR-P2) per fitting or separate power supply via plug-in power supply unit 6.75 V/12 V DC.

Dimensions of housing 235 x 1160 x 90 mm (W x H x D)

Battery compartment including battery or plug-in power supply unit with extension cable to be ordered separately.

Technical data	
Overall depth	90.00 mm
Overall height	1,160.00 mm
Overall width	235.00 mm
Tailor made	No
Type of mounting	Wall mounting
Type of operation	Manual operation
Diameter nominal	DN 15
Inlet size	G-1-2-A
Material casing	Stainless steel
Material fitting	Brass
Type of mixing	With thermostat / mixer
Sound insulation	No
Surface finish fitting	Chromed
Minimum flow pressure	1.00 bar
Adjustable flow time	No
Functional principle	Manual
Protective shutdown	No
Thermal disinfection	Prepared for automatic thermal disinfection
Default automatic hygiene flushing	Fixed interval 24 hours
Power supply connection	6-12-VDC
Type of sensor	Opto-electronic sensor
Position of power connection	Top backside
Additional connections	No
Circulation	No
Connection with pay water dispenser	Not possible
Shower pipe draining	No
Type of shower	Shower panel
Position of water connection	From top / backside
Material code casing	1.4301 Chrome Nickel steel V2A



# F5L Mix stainless steel shower panel with hand shower fitting

MODEL RANGE: F5 | F5LM2021 | 210.0590.344

Showers | Manual shower


## Accessory Mandatory



Battery compartment

2000109466


ZAQCT0003



Power supply unit

2030039477

ACEX9001



Extension cable 5 m

2030043814

ACEX9010

## Accessory Optional



Solenoid valve cartridge

2030003033

EAQFU0001



Bidirectional remote control for electronic fittings F3 and F5

2030036654

ACEX9005



2-button remote control for fittings F3 and F5

2030036849

ACEX9004



Housing extension for F5 shower panels made of stainless steel

2030057066


ACXX2011



Housing extension for F5 shower panels made of stainless steel

2030057067

ACXX2012



Housing extension for F5 shower panels made of stainless steel

2030057068

ACXX2013



Housing extension for F5 shower panels made of stainless steel

2030057069

ACXX2014



Housing extension for F5 shower panels made of stainless steel

2030057070

ACXX2015

# F5L Mix stainless steel shower panel with hand shower fitting

MODEL RANGE: F5 | F5LM2021 | 210.0590.344

Showers | Manual shower

## Accessory Optional



Shower gel dish for F5 shower panels

2030057077

ACXX2021



Connection adapter

2000101441

AQRM928


## Spare Parts



Lever cap

2030041543

ASLM2003



Rosette

2030045510


ASXM2003



Dust cap

2030010039

EAQFT0004

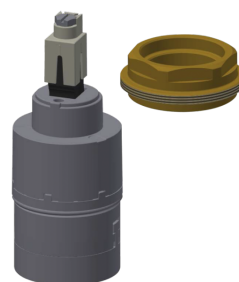

Ceramic disc cartridge with  
thermostatic scald-protection

2030042712

ASLM2004



Solenoid valve cartridge

2030003033

EAQFU0001



Disassembly tool

2030047203

ACXX9003



Stainless steel care set

2000109019

ZWSPL0024



Cleaning product CHROMOL 0,5 l

2000105091

ZWSPL0023