
## F5E Therm stainless steel shower panel with hand shower fitting

MODEL RANGE: F5 | F5ET2021 | 210.0596.035

Showers | Electronic self closing shower

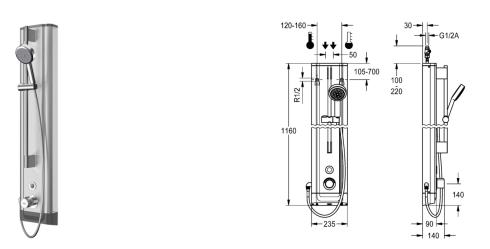

F5E Therm shower panel made of stainless steel for wall mounting with thermostatic mixer and a hand shower fitting. Electrically controlled, for connection to hot water and cold water. Shower valve with integrated solenoid valve cartridge, thermostat and mechanism for optional bypass solenoid valve cartridge to perform program-controlled thermal disinfection. Thermostat with metal handle, an adjustable and turn-proof temperature stop and an option for manual thermal disinfection. All-metal construction, visible parts high-polished or chrome-plated. Pre-fitted chrome-plated brass shower pole with height-adjustable hand shower holder and chrome-plated brass hand shower, shower head with rain jet, diameter 110 mm, shower hose 900 mm. Housing made of stainless steel with raised function surface and plastic cover caps. Button sensor including control electronics with start/stop function and deactivation for cleaning. Connecting hoses with lockable water volume control with backflow preventer and strainer. Activated water hygiene flushing 24 hours after last activation and saving of statistical data. With option for parameterization and communication via the optional bidirectional remote control. Battery operation with 6 V lithium battery (CR-P2) per fitting, separate power supply via plug-in power supply unit 6.75 V / 12 V DC or AQUA 3000 open system accessories.

Dimensions of housing 235 x 1160 x 90 mm (W x H x D)

Battery compartment including battery or plug-in power supply unit with extension cable to be ordered separately.

Technical data	
Overall depth	90.00 mm
Overall height	1,160.00 mm
Overall width	235.00 mm
Tailor made	No
Type of mounting	Wall mounting
Type of operation	Sensor operation
Diameter nominal	DN 15
Inlet size	G-1-2-A
Material casing	Stainless steel
Material fitting	Brass
Type of mixing	Thermostat
Sound insulation	No
Surface finish fitting	Chromed
Minimum flow pressure	1.00 bar
Adjustable flow time	Yes
Functional principle	Electronic self-closing
Protective shutdown	Yes
Thermal disinfection	Prepared for automatic thermal
	disinfection
Default automatic hygiene flushing	24h after the last activity
Power supply connection	6,75 / 12 V DC / A3000 open
Type of sensor	Opto-electronic sensor
Position of power connection	Top backside
Additional connections	No
Circulation	No
Shower pipe draining	No
Type of shower	Shower panel
Position of water connection	From top / backside
Material code casing	1.4301 Chrome Nickel steel V2A
Surface finish casing	Satin finished





# F5E Therm stainless steel shower panel with hand shower fitting

MODEL RANGE: F5 | F5ET2021 | 210.0596.035

Showers | Electronic self closing shower

## Accessory Mandatory







Extension cable 5 m

2030043814

ACEX9010

 Battery compartment
 Power supply unit

 2000109466
 2030039477

 ZAQCT0003
 ACEX9001

## Accessory Optional




Bidirectional remote control for electronical fittings F3 and F5 2030036654 ACEX9005



2-button remote control for fittings F3 and F5 2030036849 ACEX9004








Housing extension for F5 shower panels made of stainless steel 2030057067 ACXX2012



Housing extension for F5 shower panels made of stainless steel 2030057068 ACXX2013



Housing extension for F5 shower panels made of stainless steel 2030057069 ACXX2014



Housing extension for F5 shower panels made of stainless steel 2030057070 ACXX2015



Shower gel dish for F5 shower panels 2030057077 ACXX2021



# F5E Therm stainless steel shower panel with hand shower fitting

MODEL RANGE: F5 | F5ET2021 | 210.0596.035

Showers | Electronic self closing shower

## Accessory Optional





Electronic module EM5 for F5 shower taps 2030041918 ACET2001 Connection adapter 2000101441 AQRM928

### Spare Parts



Cover 2030031443 ESHOW0059



Stainless steel care set 2000109019 ZWSPL0024



Temperature handle 2030047082 ASXT9003

Cleaning product CHROMOL 0,5 I

2000105091

ZWSPL0023



 Temperature stop

 2030003296

 EAQLT0003



Solenoid valve cartridge 2030003033 EAQFU0001



