


# inta

## TF99730CP Timed Flow Controller (30 seconds)

### For Concealed Pipes

For use with VR991CP and VR992CP shower heads

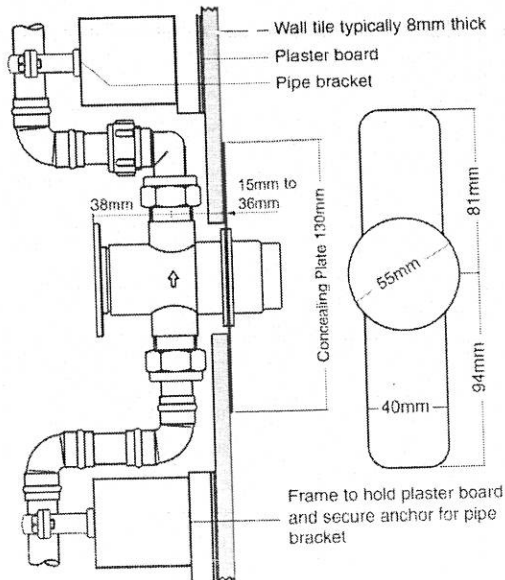

#### Operating Conditions

Max. Operating Pressure	10 bar
Min. Operating Pressure	0.2 bar
Max. Inlet Temperature	65°C
Timed Flow @ 3 bar	30 ± 5 sec.

#### Planning

The method of concealing and the structural requirements should be carefully planned before installation commences.

Access should be available to the connections of the controller and shower head, e.g. drying cupboard. The controller can be housed in a wall cavity but consideration should be given to damage, to wall tiles, should access be required to the joints.

The installation shown is just one example and the dimensions given are to help in the planning.

#### Dimensions

The body of the controller requires a minimum diameter hole of 40mm in the wall tiles. The plaster board needs a hole 40mm wide and depending upon the method used 176mm long (88mm x 2).

#### Support

The pipe brackets must be of a type that hold the pipe secure as these provide the support for the controller. The brackets should be positioned as close to the controller as possible - as shown. Additional brackets

should also be fitted towards the shower head and on the supply pipe.

#### Installation Instructions

Flush the supply pipe before fitting the controller as debris will prevent it from working correctly.

The controller should be located immediately below the shower head approximately 1.1 to 1.2 m above the floor of the shower area.

Check the flow direction arrow to ensure that the flow will be vertically upwards to the shower head.

#### Concealing Plate

Lubricate the seal with washing up liquid or similar. Apply silicone mastic around the concealing plate on the rear surface 15 to 20mm in from the edge to seal the plate to the tiles before pushing onto the controller.

A service ball valve must be installed in the supply pipe work or the controller must be supplied via a thermostatic mixing valve, which has supply connections containing an isolating valve, to enable the controller and shower head to be isolated for cleaning or servicing.

#### Aftercare

To maintain the appearance of the flow controller periodically it should be cleaned with a soft damp cloth and a mild detergent before rinsing.

Intatec Limited, Mustang Drive, Stafford, Staffordshire, ST16 1GW  
Tel: 01785 218230 Fax: 01785 218231 email: [sales@intatec.co.uk](mailto:sales@intatec.co.uk)