


# Washroom Solutions Specification Edition 2



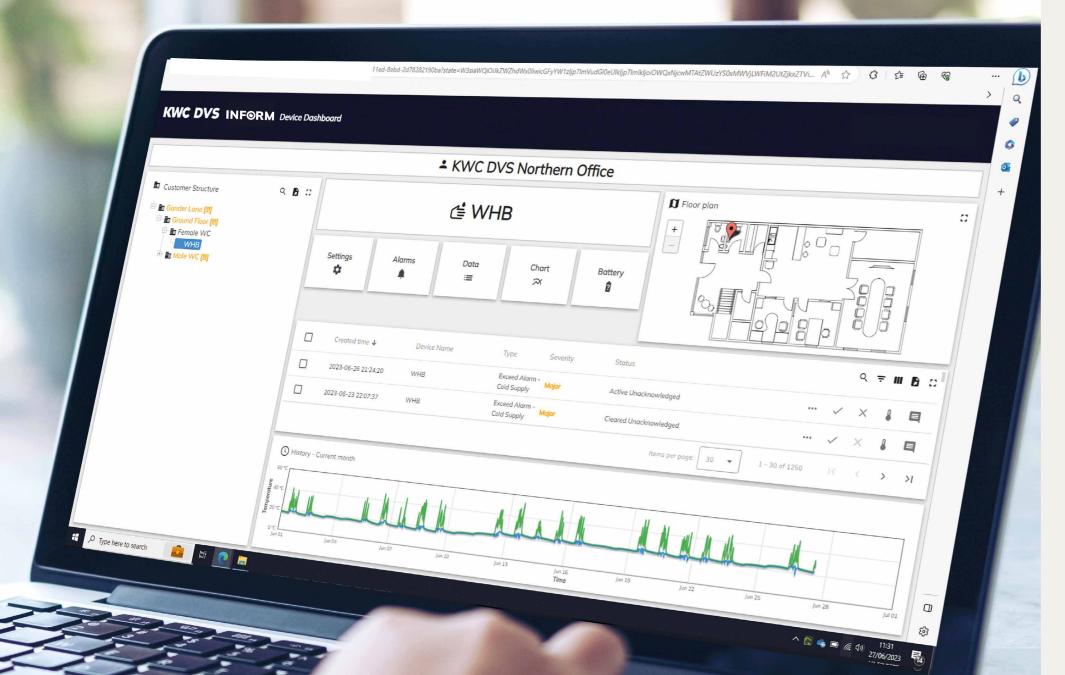

# Contents

#### Table of contents

KWC DVS INTRODUCTION	1 - 9
OUR MATERIAL RANGE	10 - 17
PROJECT REFERENCES	18 - 23
TAPS AND SPOUTS	24 - 43
WASHBASINS & WASHTROUGHS	44 - 61
GLACIER ALL IN ONE MIRROR SYSTEM	62 - 67
CLINICAL OUTLETS	68- 71
NFORM OUTLET TAPS	72 - 77
SURGEON SCRUB TROUGHS	78 - 81
MEDICAL & UTILITY SINKS	82 - 93
URINALS	94 - 103
WCS	102 - 115
SHOWERS	116 - 129
ACCESSIBLE WASHROOMS	130 - 149
NURSERY WASHROOMS	150 - 155
BABY CHANGE	156 - 159
ACCESSORIES	160 - 185
LIGATURE RESISTANT & HIGH SECURITY	186 - 225
CATERING	226 - 243
DRINKING FOUNTAINS	244 - 249

Contents



# AVC Aquirette Cmln Pastatia 1-3 14/14 tellegende 14/14 tellegende

#### KWC DVS

# Over 235 years of washroom expertise and knowledge

Specialising in water saving technology for commercial washrooms, KWC DVS Ltd. has been producing leading automatic washroom technology for over 35 years. KWC DVS is a market leader in the field of water-saving products along with automatic washroom products for specialist applications, including healthcare, mental healthcare, custodial and the public sector.



KWC DVS Northern Office, Chesterfield, UK

Alongside our extensive product portfolio, an expert team of engineers are on hand to support installations, whilst our technical sales teams give tailored project support and specification advice.

The KWC Group combines the benefits of reduced water consumption with a focus on hygienic design. KWC DVS are proud to be part of a global Group that produces products which have been used in both domestic and commercial environments for many years.



KWC DVS Southern Office, Devon, UK

The KWC brand brings together a collection of international expertise which forms KWC Group. We unite our global washroom divisions under the new KWC brand.

Together we have been developing and improving our products and expertise for decades, in some cases more than a century. This is what makes us trusted suppliers for major projects across the world.

4 KWC DVS

# A lifetime of reasons to choose a KWC DVS aftersales package

#### Nationwide technical support

Not just another manufacturer, KWC DVS have a fully trained and approved service and installation team servicing the needs of the UK nationwide. All KWC DVS engineers are City & Guilds certified, washroom product experts and undergo extensive Health and Safety training. At our Paignton Head Office, we also have an industry leading after-sales team on hand to make things that little bit easier.

#### Commissioning – 5 Year on-site warranty upgrade

Want to install it yourself but make sure everything is as it should be? Our commissioning package is an affordable way to make sure the installation is compliant, efficient and all products have the correct settings to meet the demands of your new washroom.

Products commissioned by us benefit from an enhanced warranty, upgrading the standard 5 year warranty to an onsite warranty for additional peace of mind.









# Sign up to a service plan and protect your products with an industry leading lifetime warranty

# Installation – 5 Year on-site warranty upgrade

Guarantee it's done right and choose installation by our installation experts. With the added peace of mind we'll provide an on-site warranty for 5 years for any parts we have installed or commissioned.

Our installation team operate nationwide and have extensive experience across a number of sectors including transport, healthcare, mental healthcare, custodial and retail.

# Servicing – Lifetime warranty upgrade

Investing in our annual service package is the best way to protect the longevity and performance of your washroom water controls. With regular maintenance and parts replacement, we ensure that your controls are operating with optimum water efficiency, minimising waste and maximising performance. By maintaining a live service package, you can enjoy the peace of mind that comes with a lifetime warranty for all eligible products. Trust us to keep your washroom water controls in top condition for years to come.

Contact our Aftersales team now to discuss your package options Email: kwcdvstechsupport@kwc.com

Tel: +44 (0) 1803 529021

6 Aftersales

## Welcome to the world of INFORM

## Not just another monitoring system

The INFORM system has been designed to allow you to take complete control of your water system. INFORM's 4 key functions include water temperature monitoring (INFORM Monitor) wireless control of solenoid valves (INFORM Control) outlets that can monitor temperature (INFORM Outlet) and a service portal (INFORM Service). When installed correctly and used in conjunction with one another, you can ensure water safety for all your buildings assets.

The INFORM system is available via a user friendly web based platform that can be accessed 24/7 on phones, tablets or PCs. The dashboard allows for fully configurable alarms, audit trails and exportable reports which give you the management information you need to ensure you have a safe water system and aid compliance. If you would like to discuss a free trial please contact us.





#### **INFORM Monitor**

This smart digital solution provides detailed, exportable data for current and historical periods. You can understand how your water system temperatures perform, to see trends and the impact of operational changes or remedial works. Identifying high-performing areas can allow replication and improvement across your water system. Inform Monitor data empowers confident decisions with clear evidence, replacing guesswork and assumptions. Prioritise areas of greatest need and maximize efficiency.



#### **INFORM Control**

A range of products that provide unrivalled remote control of power sockets, lighting and water in individual or multiple rooms. Options include the ability to effortlessly oversee individual rooms or exercise centralised control over an entire section, all with just a few clicks. Inform Control products can remotely control, monitor, disinfect and verify multiple events including: remote wireless control of valves, remote or on-site programming, quantifying valve operations, timed & dynamic hygiene purges, identify infrequently used outlets, monitor temperatures, thermal disinfections & cold water isolation checks on TMVs etc. With a selection of user friendly, configurable alarms which can be set to alert when required temperature or usage profiles are not met, thereby aiding compliance

#### **INFORM Outlet**

Outlet has been developed to help to accurately measure the water temperature as close as possible to the point of discharge. Inform Outlets all feature an in-built anti-microbial outlet and thermistors which connect directly to the Inform platform. The range includes taps, spouts, shower towers, vanity units, basins etc



8 INFORM

#### Quality materials

# Miranit® and GRP - Robust solid surface materials for all environments

#### Miranit composite

Miranit® is made of shatter-proof, resin-bonded mineral granite, providing a modern and aesthetically pleasing design in public and semi-public environments. Cast in a single mould without adhesive seams or joints, Miranit® products feature the following important characteristics: high stability, elegant appearance and high durability due to the smooth, pore-free, hygienic and easy-to-maintain gelcoat surface.

Miranit® is a stable compound consisting of approximately 80% natural minerals such as marble, sandstone and quartz sand and about 20% high-quality unsaturated polyester resin. The final product is highly stable in combination with the unsaturated polyester resin, it also has excellent forming characteristics to facilitate easy production into cast moulds. This makes it possible to create products of almost any shape.

Miranit has many advantages compared to traditional ceramic sanitaryware. Sanitary products manufactured under the brand name Miranit® can be classed under the generic term 'cast mineral products'. Compared to other cast products, such as ceramic sanitaryware, Miranit® products have the following advantages:

- Hygienic surface finish
- Resistant to temperatures up to 80°C
- Smooth, pore-free and high-gloss gelcoat surface
- Cast in a single mould without any seams or joints
- Impact resistance and shatter-proof
- A fracture-resistant compound made of natural minerals
- The small radii of surface edges provide a modern design
- Integrated accessories add a unified feel
- Customisable and bespoke options available
- A max. length of 3.6m for bespoke washbasins
- Bespoke washbasins can be cut to length on-site
- Choice of colours and integrated accessories
- Choice of finishes high-gloss or solid matt



Miranit contains 80% natural minerals such as marble, sandstone and quartz sand and approximately 20% high-quality unsaturated polyester resin.









# Glass Reinforced Polyester - MOJ approved for the most demanding of environments

Our Glass reinforced polyester (GRP) is a high impact and corrosion-resistant composite material. Our expertise of working with GRP in both the Mental Health and Custodial sectors span many decades. Our expert UK based team are able to produce safe, ligature resistant products that best meet the needs of the client and associated regulatory bodies in these fields. Tried and tested by the NHS, MOJ and MOD in the toughest of environments.

Although lightweight and easy to mount on existing structures, GRP is also extremely robust. The production technique to manufacture GRP is similar to that used to produce ballistic armour. It is finished with a thick white gel coat, which makes it highly durable and provides a modern finish. GRP is also fire retardant, making it ideal for high security or correctional facilities.

GRP is well suited when designing load-bearing products such as sanitaryware because its high-strength properties can fulfil the requirements for this application. GRP also allows for less material to be used than other structural materials. These properties make GRP the ideal product for high-security environments, ensuring ligature resistance and long-lasting product life.

Our GRP products have been meticulously crafted for the most stringent high-security environments. Designed with unwavering focus on safety, these products stand as a testament to our commitment to providing safety within mental health and high-security environments.

10 Miranit and GRP

#### Quality materials

# Stainless steel - a hygienic, durable and low maintenance solution







#### Stainless steel

Washroom products manufactured from stainless steel inhibit vandalism and are easy to clean, helping building operators keep service and maintenance costs to a minimum.

Stainless steel is not only resistant to moisture and most acids, it also stands out due to its strength, hygienic characteristics and high tolerance to hot and cold temperatures, making it an ideal choice for hospitals and food processing plants. Dirt and oil can easily be washed from the smooth, pore-free surface without harsh cleaning products.

Stainless steel is a low-carbon steel that contains at least 10.5% chromium (Cr) and no more than 1.2% carbon (C).


They form a self-regenerating surface layer that gives the material resistance to corrosion and improves performance compared to unalloyed steels.

Chromium is the key ingredient which makes it stainless and rust-resistant. Therefore, it ages gracefully. KWC uses steels with a higher chromium content and nickel alloy for its sanitary products, increasing its resistance to corrosion..

#### Surfaces overview

Material number 1.4301 (AISI 304) is used in accordance with DIN EN 10088. 304 stainless steel is manufactured with 18% chromium and 10% nickel, giving the material its particular characteristics. Stainless steel is 100% recyclable.



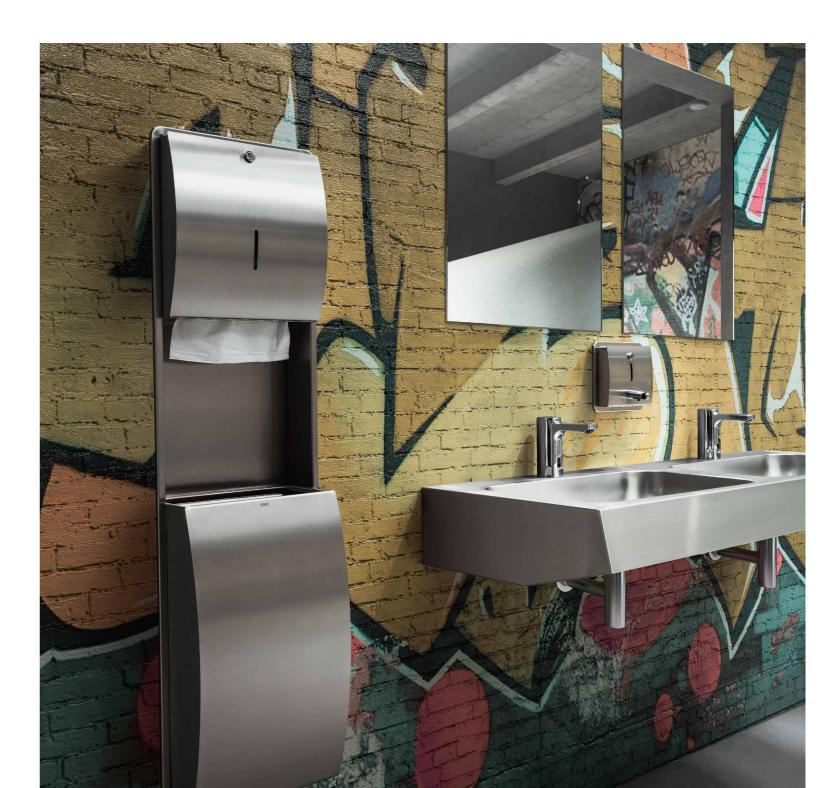

#### Washroom sanitaryware

## Ceramics - the SanCeram collection

Looking for the perfect ceramic sanitaryware to complement your KWC DVS automatic washroom products? Look no further than the SanCeram collection, which includes WC pans, urinals, and basins. Made from high-quality vitreous china that meets BS 3402 standards, these ceramics feature an integral glaze that resists water absorption, burning, stains, scratching, and even acid or alkali attacks. By pairing SanCeram ceramics with KWC DVS products, you can enjoy a complete washroom solution that's both easy and professional.

#### The SanCeram Promise

#### **Quality Guarantee**

We promise to bring our customers the very best products in the market place. That's why we are confident to offer a 25 year warranty on all our ceramics.

#### **Extensive Product Range**

Our breadth of range is extraordinary. Whatever the project, whatever the space, we have a product that fits, perfectly. Surprisingly Affordable

We don't believe in nasty surprises. With SanCeram you have our ward that quality and style won't cost you a fortune.

#### **Unrivalled Support**

Our team of experts are on hand to help you every step of the way. From choosing the right product, through to technical and installation queries, we are only a call or email away.

#### **Environmentally Friendly**

We are dedicated to preserving our planet. The SanCeram range is manufactured using eco-riendly methods and our water saving products will help toward earning BREEAM credits.

#### Why choose us?



Cost Effective
Savings of up to 40%



25 Year Warranty
Our ceramics come with a
25 year warranty



Approved & Certified SanCeram contains HBN, DDA, WRAS approved and LABC certified products



Contemporary Styling Inspired, modern designs without compromising on quality



**Specification Support**We are on hand to offer support through our free

NBS writing service



Technical Support

Dedicated technical team
to offer support and advice
throughout the project




Speedy Delivery
Fast and efficient delivery,
stocked items delivered
within 48 hours









. Biomaster reduces 80% of bacteria after 15 minutes 3. Durable protection for life of the product after 24 hours 20 15 mins 30 mins 45 mins 1 hour 2 hours 24 hours

\*For illustrative purposes only, actual reduction rate varies depending on material and addition rate

**BIOMASTER REDUCTION TIMES\*** 

WITHOUT BIOMASTER™


Microbes settle and multiply on surfaces, causing degradation.

Silver ions actively inhibit all microbes and protects

BioMaster pioneered the use of anti-microbial additives and remains the recognised leader and most trusted supplier of anti-microbial technology for polymers textiles, paints and coatings.



We have a range of products manufactured using BioMaster such as Multi-Spouts, anti-microbial valves, station kits and more, providing ultimate hygiene in public or semi-public environments. Our NEW INFORM Outlet water temperature monitoring tap features an anti-microbial outlet made with BioMaster and can be operated using our BioMaster anti-microbial valves.



BioMaster binds to the cell wall disrupting growth.



The silver ions stop the cell from producing energy



...and interrupt the cells DNA, preventing replication

#### How effective is BioMaster?

Very. Polygiene BioMaster™ is proven to inhibit the growth of microbes by up to 99.99%.

#### Is BioMaster safe?

Yes. It is based on silver ion technology, recognised for centuries with no harmful effects. Polygiene is used in medical, food and water applications.

#### What's the difference between antimicrobial and antibacterial?

An antimicrobial inhibits the growth of, or destroys harmful microorganisms such as bacteria, fungi and moulds. An antibacterial specifically prevents the growth of bacteria.

#### Has BioMaster been tested?

Yes, repeatedly. BioMaster is tested to ISO standards. We also undertake on-going quality control tests and environmental trials.

#### How long is BioMaster effective for?

BioMaster is effective for the intended lifetime of the product it's added to. It is built-in and doesn't wear off or leach

#### Does BioMaster affect a product in any way?

No. You can't see, smell or even taste BioMaster.

#### Can a BioMaster-treated polymer be recycled?

Yes. It can be recycled effectively without any complications

Biomaster

# Project references



#### Revolutionising Water Management at Great Ormond Street Hospital

The world's leading children's hospital, Great Ormond Street, has undertaken a monumental transformation, and at the heart of this redevelopment stood the need for an advanced water management solution. KWC DVS were on hand to provide support for this flagship project. Our intelligent water management system is helping significantly improve both hygiene and water efficiency through convenient central monitoring and control.

#### Water saving solutions for Europe's busiest airport - Heathrow

Selected as the preferred partner for washrooms throughout Britain's largest airport including the most recently built Terminal 2, "The Queen's Terminal". This remarkable partnership showcases our cutting-edge solutions in flush valves, urinal controls, automatic taps and accessories. Heathrow Airport has successfully acquired products that align with their water conservation needs, catering to the anticipated 60 million passengers annually. The robustness and resilience of KWC DVS products are primed to withstand the rigorous demands of high footfall, promising substantial operational savings alongside unparalleled performance.



# Premier water controls for Premier League football - The Tottenham Hotspur stadium

KWC DVS were selected to provide upgraded washroom systems for the prestigious Tottenham Hotspur Stadium in North London. This internationally renowned, multi-purpose arena with a capacity of 62,850 hosts a diverse range of events, from football matches to concerts, NFL games and Rugby Union tournaments. Our collaboration with this iconic venue exemplifies our commitment to elevating washroom experiences while championing water conservation. The primary goal of the project was to create hygienic and inviting washrooms whilst ensuring responsible water usage.

Given the substantial foot traffic expected in a stadium of this magnitude, our tailored solution seamlessly integrated both objectives. DVS put forward customised programmable sensors for WCs, urinals and showers alongside WC flush valves. These products can be fully optimised and programmed on-site using the handheld programmer, allowing different settings to be applied to products to best suit the stadium's needs. For example, all urinals now have the shortest possible walk away time, providing a full flush as often as possible to keep the bowls clean whilst saving water. Our contribution to the Tottenham Hotspur Stadium project showcases KWC DVS's dedication to technical, excellence, innovation, and sustainability. As we move forward, we continue to be the preferred partner for those seeking first-class solutions that seamlessly blend quality, cutting-edge technology, and environmental responsibility.



18 Project references
Project references

# Project references

# HMP Durham, washrooms solutions for the most demanding environments

HM Prison Durham, a Category B men's prison built in 1819, embarked on a house block renovation project. A key aspect was ensuring the new washrooms were not only secure and resistant to impact, ligature, and vandalism, but also provided a safe and hygienic environment for both inmates and staff.

KWC DVS were selected as the preferred supplier and provided a comprehensive washroom solution that addressed all project requirements, including MOJ-Approved Combination Units and Intelligent Washroom Controls. The results of this partnership were enhanced water safety, reduced vandalism, and improved efficiency. The project demonstrates the effectiveness of KWC DVS' solutions in high-security environments.







#### P22 Project – St Anns Mental Health Unit, London

St. Anns, London, new mental health inpatient building Blossom Court underwent its second phase and specified KWC DVS GRP and stainless-steel products for the project. The plans for the redevelopment of St Ann's Hospital were developed with patients, staff and local stakeholders and involved a series of improvements. Following completion of the new inpatient unit in summer 2020, Phase 2 includes the refurbishment of other buildings, a new restaurant for visitors and staff and improvements to the site power and water supplies, roadways, car parking and landscaping.

Designing sanitaryware for mental health and high-security environments can be a challenge; however, the KWC DVS branded safe ensuite range is manufactured using advanced technologies provides the perfect solution. These high-security and ligature resistant products are virtually unbreakable and create a safe solution within all mental health facilities.





#### Ferndene Hospital, Northumberland

Ferndene, based in Prudhoe, Northumberland, is a custom-built inpatient Centre that specializes in treatment for young people with various health, behavioural and emotional requirements. The Centre opened its doors in Autumn 2011 and has four different units that cater to inpatients' specific needs. The units provide educational and social facilities with modern amenities to create supportive and therapeutic environments. For their latest refurbishment the Centre specified KWC DVS products. Our safe en-suite range is intended for the toughest of environments and manufactured using advanced technologies. Robust, vandal resistant and avoiding ligature points where possible, the range is highly resistant to recurrent stresses and high impact. Designed with a high-grade polyester gel coat surface, the design is aesthetically pleasing and can be used in conjunction with our latest range of floor and wall mounted WC pans. With a rear concealed outlet that can be removed if required, the customer is guaranteed a product that is both secure and easy to maintain.



Project references


Project references

# International project references

#### Belfast City Hospital, Northern Ireland

The Belfast City Hospital located in Northern Ireland, is a 900-bed modern University Teaching Hospital providing local acute services and key regional specialities. Designed to the highest building and infection control standards. Medi-10 Autoclavable spouts have been installed to provide the ability to carry out and monitor hygiene purges.

The autoclavable design of the Medi-10 spout provides the on-site team with the ability to easily disinfect the outlets, away from the ward whilst minimising downtime. The Medi-10 range also includes the functionality to attach point of use filters as required. Coupled with our intelligent water management system, the Trust can control valves, monitor temperatures, see valve counts, set timed hygiene purges and identify infrequently used outlets etc. All events are monitored, verified and form part of the extensive range of management information available.

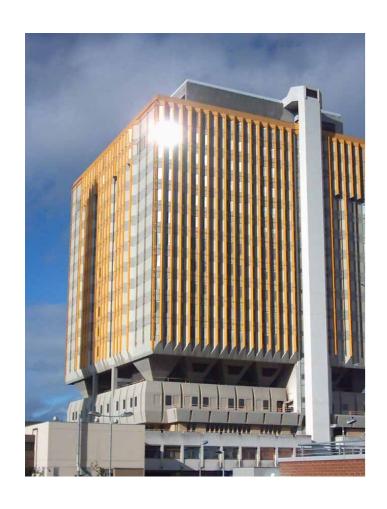





#### The Louvre Abu Dhabi, UAE

The £1 Billion Art Museum houses 26 individual galleries and is exhibiting pieces from many famous artists including Van Gogh and Picasso. To compliment this luxurious building, premium and hygienic hand washing facilities in the washrooms were key. KWC DVS No-touch taps were chosen for the project and hundreds of Aquarius outlets were installed throughout the site. The Aquarius range provided the perfect match for coping with high traffic, in addition to meeting the aesthetic requirements of such a prestigious building.





#### Queen Alia International Airport, Jordan

Jordan has one of the lowest levels of water resources availability per capita in the world, which made water saving an important consideration when choosing taps for the ablution room, a place used for ritual cleaning before prayer.

KWC DVS Aquarius taps were therefore an ideal choice not only because the no touch technology is ideal for areas where hygiene is of the highest importance, but also to prevent water wastage for this scarce resource through intelligent shut off. They are also ideal for high traffic washroom areas as demonstrated at comparable sites such as London Heathrow for over two decades.


This was a great project for KWC DVS to be involved with and just one example of many successful projects completed in the Middle East. Queen Alia airport is now capable of handling around 13 million passengers a year which is more than 3 times its previous capacity.



Project references



# 316 Stainless steel taps built to last




#### AQUARIUS A45 TAP SPOUT - BRUSHED

Aquarius deck mounted A45 tap manfactured in 316 stainless steel with a brushed finish. Sensor operated for maximum hygiene and efficiency. 5 litres per minute integrated flow control. (other flow rates available). Designed with automatic purge function, sensor range adjustment, wave on/wave off function, anti vandal and lock out functions and a chlorination function.

Spout projection: 118mm

AT03-011	With PEX hose (15mm)
AT03-012	With copper tails (10mm)
Mandatory A	Accessories;
AT00-221	Single station antimicrobial mains kit
AC17-047	TMV3
Compliment	ary Accessories;
SD01-012	A45 soap dispenser



#### AQUARIUS A45 DOC M TAP SPOUT - BRUSHED

Aquarius deck mounted A45 Doc M tap manfactured in 316 stainless steel with a brushed finish. Sensor operated for maximum hygiene and efficiency. 5 litres per minute integrated flow control. (other flow rates available). Designed with automatic purge function, sensor range adjustment, wave on/wave off function, anti vandal and lock out functions and a chlorination function. Spout projection: 97mm


AT03-021	With PEX hose (15mm)
AT03-022	With copper tails (10mm)
Mandatory /	Accessories;
AT00-221	Single station antimicrobial mains kit
AC17-047	TMV3
Compliment	ary Accessories;
SD01-012	A45 soap dispenser



#### **AQUARIUS A32 TAP SPOUT - BRUSHED**

Aquarius deck mounted A32 tap manfactured in 316 stainless steel with a brushed finish. Sensor operated for maximum hygiene and efficiency. 5 litres per minute integrated flow control. (other flow rates available). Designed with automatic purge function, sensor range adjustment, wave on/wave off function, anti vandal and lock out functions and a chlorination function.


AT03-001	With PEX hose (15mm)
AT03-002	With copper tails (10mm)
Mandatory A	Accessories;
AT00-221	Single station antimicrobial mains kit
AC17-047	TMV3
Compliment	ary Accessories;
SD01-012	A45 soap dispenser



#### AQUARIUS TAP 150MM - BRUSHED

Aquarius 150mm wall mounted tap manfactured in 316 stainless steel with a brushed finish. Sensor operated for maximum hygiene and efficiency. 5 litres per minute integrated flow control. (other flow rates available). Designed with automatic purge function, sensor range adjustment, wave on/wave off function, anti vandal and lock out functions and a chlorination function. Spout projection: 120mm

AT02-001	With PEX hose (15mm)
AT02-001	With copper tails (10mm)
AT02-002	Stainless tail (10mm)
u= u u	
Mandatory A	
AT00-221	Single station antimicrobial mains kit
AC17-047	IMV3
	ary Accessories;
SD01-005	Wall mounted soap dispenser



#### **AQUARIUS TAP 200MM - BRUSHED**

Aquarius 200mm wall mounted tap manfactured in 316 stainless steel with a brushed finish. Sensor operated for maximum hygiene and efficiency. 5 litres per minute integrated flow control. (other flow rates available). Designed with automatic purge function, sensor range adjustment, wave on/wave off function, anti vandal and lock out functions and a chlorination function. Spout projection: 170mm

With PEX hose (15mm)	
With copper tails (10mm)	
Stainless tail (10mm)	
ccessories;	
Single station antimicrobial mains kit	
TMV3	
Complimentary Accessories;	
Wall mounted soap dispenser	



#### **AQUARIUS TAP 250MM - BRUSHED**

Aquarius 250mm wall mounted tap manfactured in 316 stainless steel with a brushed finish. Sensor operated for maximum hygiene and efficiency. 5 litres per minute integrated flow control. (other flow rates available). Designed with automatic purge function, sensor range adjustment, wave on/wave off function, anti vandal and lock out functions and a chlorination function. Spout projection: 220mm

AT02-021	With PEX hose (15mm)
AT02-023	With copper tails (10mm)
AT02-024	Stainless tail (10mm)
Mandatory A	Accessories;
AT00-221	Single station antimicrobial mains kit
AC17-047	TMV3
Compliment	ary Accessories;
SD01-005	Wall mounted soap dispenser

Taps and spouts


## Polished 316 Stainless steel taps



#### AQUARIUS A45 TAP SPOUT - POLISHED

Aquarius deck mounted A45 tap manfactured in 316 stainless steel with a polished finish. Sensor operated for maximum hygiene and efficiency. 5 litres per minute integrated flow control. (other flow rates available). Designed with automatic purge function, sensor range adjustment, wave on/wave off function, anti vandal and lock out functions and a chlorination function. Spout projection: 118mm

AT03-013	With PEX hose (15mm)
AT03-014	With copper tails (10mm)
Mandatory A	Accessories;
AT00-221	Single station antimicrobial mains kit
AC17-047	TMV3
Compliment	ary Accessories;
SD01-013	A45 soap dispenser
-	




#### AQUARIUS TAP 150MM - POLISHED

Aquarius 150mm wall mounted tap manfactured in 316 stainless steel with a polished finish. Sensor operated for maximum hygiene and efficiency. 5 litres per minute integrated flow control. (other flow rates available). Designed with automatic purge function, sensor range adjustment, wave on/wave off function, anti vandal and lock out functions and a chlorination function. Spout projection: 120mm

AT02-005	With PEX hose (15mm)
AT02-006	With copper tails (10mm)
Mandatory /	Accessories;
AT00-221	Single station antimicrobial mains kit
AC17-047	TMV3
Compliment	ary Accessories;
SD01-001	Wall mounted soap dispenser





#### AQUARIUS A45 DOC M TAP SPOUT - POLISHED

Aquarius deck mounted A45 Doc M tap manfactured in 316 stainless steel with a polished finish. Sensor operated for maximum hygiene and efficiency. 5 litres per minute integrated flow control. (other flow rates available). Designed with automatic purge function, sensor range adjustment, wave on/wave off function, anti vandal and lock out functions and a chlorination function. Spout projection: 97mm

AT03-023	With PEX hose (15mm)
AT03-024	With copper tails (10mm)
Mandatory A	Accessories;
AT00-221	Single station antimicrobial mains kit
AC17-047	TMV3
Complimento	ary Accessories;
SD01-013	A45 soap dispenser




#### AQUARIUS TAP 200MM - POLISHED

Aquarius 200mm wall mounted tap manfactured in 316 stainless steel with a polished finish. Sensor operated for maximum hygiene and efficiency. 5 litres per minute integrated flow control. (other flow rates available). Designed with automatic purge function, sensor range adjustment, wave on/wave off function, anti vandal and lock out functions and a chlorination function. Spout projection: 170mm

AT02-015	With PEX hose (15mm)
AT02-016	With copper tails (10mm)
Mandatory A	Accessories;
AT00-221	Single station antimicrobial mains kit
AC17-047	TMV3
Compliment	ary Accessories;
SD01-001	Wall mounted soap dispenser





#### AQUARIUS A32 TAP SPOUT - POLISHED

Aquarius deck mounted A32 tap manfactured in 316 stainless steel with a polished finish. Sensor operated for maximum hygiene and efficiency. 5 litres per minute integrated flow control. (other flow rates available). Designed with automatic purge function, sensor range adjustment, wave on/wave off function, anti vandal and lock out functions and a chlorination function.

Spout projection: 140mm

AT03-003	With PEX hose (15mm)
AT03-004	With copper tails (10mm)
Mandatory A	Accessories;
AT00-221	Single station antimicrobial mains kit
AC17-047	TMV3
Compliment	ary Accessories;
SD01-013	A45 soap dispenser



#### **AQUARIUS TAP 250MM - POLISHED**

Aquarius 250mm wall mounted tap manfactured in 316 stainless steel with a polished finish. Sensor operated for maximum hygiene and efficiency. 5 litres per minute integrated flow control. (other flow rates available). Designed with automatic purge function, sensor range adjustment, wave on/wave off function, anti vandal and lock out functions and a chlorination function. Spout projection: 220mm

With PEX hose (15mm)		
With copper tails (10mm)		
Mandatory Accessories;		
Single station antimicrobial mains kit		
TMV3		
Complimentary Accessories;		
Wall mounted soap dispenser		

Taps and spouts

# Taps and spouts



#### CLASSIC TOUCH-FREE TAP

Classic touch-free tap manufactured in brass with a chromed finish. Sensor operated for maximum hygiene and efficiency. 5 litres per minute integrated flow control (other flow rates available). Designed with automatic purge function, sensor range adjustment, wave on/wave off function, anti vandal and lock out functions and

Spout	projection:	145mm
-------	-------------	-------

AT01-001	With PEX hose (15mm)
AT01-002	With copper tails (10mm)
AT01-003	With stainless tails (10mm)
Mandatory A	Accessories;
AT00-221	Single station antimicrobial mains kit
AC17-047	TMV3
Compliment	ary Accessories;
SD01-002	Swan neck soap dispenser








#### AQUARIUS HIGH NECK TAP

Aquarius high neck tap manufactured from 316 stainless steel with a brushed or polished finish. Sensor operated for maximum hygiene and efficiency. 5 litres per minute integrated flow control (other  $\,$ flow rates available). Designed with automatic purge function, sensor range adjustment, wave on/wave off function, anti vandal and lock out functions and a chlorination function. Spout projection: 130mm

AT03-041	Brushed with PEX hose (15mm)
AT03-043	Polished with PEX hose (15mm)
Mandatory A	Accessories;
AT00-221	Single station antimicrobial mains kit
AC17-047	TMV3
Complimentary Accessories;	
SD01-008	Pillar soap dispenser (Nickel brushed)





#### AQUARIUS SHORT NECK TAP

Aquarius short neck tap manufactured from 316 stainless steel with a brushed finish. Sensor operated for maximum hygiene and efficiency. 5 litres per minute integrated flow control (other flow rates available). Designed with automatic purge function, sensor range adjustment, wave on/wave off function, anti vandal and lock out functions and a chlorination function.

AT03-031	Brushed with PEX hose (15mm)	
AT03-032	Brushed with copper tails (10mm)	
AT03-034	Polished with PEX hose (15mm)	
Mandatory Accessories;		
AT00-221	Single station antimicrobial mains kit	
AC17-047	TMV3	
Complimentary Accessories;		
SD01-008	Pillar soap dispenser (Nickel brushed)	






#### **CLASSIC SWAN TOUCH-FREE TAP**

Classic Swan touch-free tap manufactured in brass with a chromed finish. Sensor operated for maximum hygiene and efficiency. 5 litres per minute integrated flow control (other flow rates available). Designed with automatic purge function, sensor range adjustment, wave on/wave off function, anti vandal and lock out functions and a chlorination function.

Spout projec	tion. 145mm
AT01-011	With PEX hose (15mm)
AT01-012	With copper tails (10mm)
AT01-013	With stainless tails (10mm)
Mandatory A	Accessories;
AT00-221	Single station antimicrobial mains kit
AC17-047	TMV3
Compliment	ary Accessories;
SD01-002	Swan neck soap dispenser






#### AQUARIUS TALL PILLAR TAP

Aquarius tall pillar tap manufactured in brass with a chromed finish. Sensor operated for maximum hygiene and efficiency. 5 litres per minute integrated flow control (other flow rates available). Designed with automatic purge function, sensor range adjustment, wave on/wave off function, anti vandal and lock out functions and a chlorination function. Single mixed feed connection by With PEX lined hose (15mm connection).

Spout projection: 220mm

AT03-061	I all pillar tap
Mandatory A	Accessories;
AT00-221	Single station antimicrobial mains kit
AC17-047	TMV3
Compliment	ary Accessories;
SD01-003	Pillar soap dispenser (chrome)
SW00-066	Rectangular Langley countertop basin
SW00-067	Circular Langley countertop basin






#### AQUARIUS SHORT PILLAR TAP

Aquarius short pillar tap manufactured in brass with a chromed finish. Sensor operated for maximum hygiene and efficiency. 5 litres per minute integrated flow control (other flow rates available). Designed with automatic purge function, sensor range adjustment, wave on/wave off function, anti vandal and lock out functions and a chlorination function. Single mixed feed connection by With PEX lined hose (15mm connection).

AT03-051	Short pillar tap
Mandatory A	ccessories;
AT00-221	Single station antimicrobial mains kit
AC17-047	TMV3
Complimenta	ry Accessories;
SD01-003	Pillar soap dispenser (chrome)
SW00-066	Rectangular Langley countertop basin
SW00-067	Circular Langley countertop basin
-	

# F3 & F5 - Functionality meets simplicity and affordability






#### F3E-MIX ELECTRONIC PRE-MIXED PILLAR TAP - BATTERY

F3E pillar tap DN 15 for sanitary facilities, opto-electronically controlled. For connection to pre-mixed hot or cold water via hose and strainer. Control electronics, solenoid valve cartridge and sensor in all-metal housing, high-polished chromium-plated brass. Activated water hygiene flushing 24 hours after last activation, safety switch-off with continuous reflection and saving of statistical data. If you require additional functionality, such as sensor range adjustment and tap run time, a bi-directional remote is available as an extra.

Supplied with a battery compartment including 6V lithium battery. Supplied with electronics, solenoid valve cartridge and sensor. Flow rate at 3 bar: 6.0 l/min. Dimensions:  $45 \times 150 \times 160$ mm

F3EV1001	F3E pillar mixer
Mandatory A	Accessories;
AC17-047	TMV3
Compliment	ary Accessories;
SD01-013	A45 soap dispenser (chrome)
AC01-001	Handheld programmer






#### F3S SELF-CLOSING PRE-MIXED PILLAR TAP

F3S Self-closing pre-mixed pillar tap manufactured from brass with chrome finish. Self-closing cartridge, hydraulically controlled, piston-free design, self-closing, stepless adjustment of flow duration. For connection to pre-mixed hot water or cold water. Casing, high-polished chromium-plated brass.

Flow rate at 3 bar: 3.0 l/min. Dimensions: 45 x 138 x 100mm

F3SV1101	F3S self-closing pillar tap
Mandatory A	ccessories;
AC17-047	TMV3
Complimento	ary Accessories;
SD80	Tabletop soap dispenser






#### F5S-MIX SELF-CLOSING PILLAR MIXER TAP

F5S-Mix self-closing pillar mixer manufactured from brass with chrome finish. FRAMIC self-closing mixing cartridge, hydraulically controlled, low-maintenance and stagnation-free, with ceramic disc technology, self-closing, flow pressure-independent due to medium-separated design. Stepless adjustment of flow duration. With adjustable, turn-proof temperature stop. For connection to hot water and cold water via hoses with integrated backflow preventer and strainers. All-metal construction, high-polished chromium-plated brass. Anti-theft aerator, SLIM design.

Flow rate at 3 bar: 5.0 l/min Dimensions: 50 x 170 x 125mm

F5SM1001	F5S Self-closing pillar mixer
Compliment	tary Accessories;
SD80	Tabletop soap dispenser






#### F5E-MIX ELECTRONIC PRE-MIXED PILLAR TAP - BATTERY

F5E-Mix electronic pre-mixed pillar tap. For connection to pre-mixed hot or cold water via hose and strainer. Control electronics, solenoid valve cartridge, 6 V lithium battery (CR-P2) and sensor in all-metal housing, high-polished chromium-plated brass. Anti-theft aerator, design SLIM, with integrated flow regulator 5.0 l/min. Activated water hygiene flushing 24 hours after last activation, safety switch-off with continuous reflection and saving of statistical data. If you require additional functionality, such as sensor range adjustment and tap run time, a bi-directional remote is available as an extra.

Supplied with 6V lithium battery and sensor Flow rate at 3 bar: 5.0 l/min. Dimensions: 57 X 140mm (W x H)

F5EV1001	F5E pillar mixer
Mandatory A	Accessories;
AC17-047	TMV3
Compliment	ary Accessories;
SD01-003	Pillar soap dispenser (chrome)
AC01-001	Handheld programmer






#### F5E-MIX ELECTRONIC PILLAR MIXER - BATTERY

F5E-Mix opto-electronically controlled mixer, manufactured from brass with chrome finish. Designed with an adjustable temperature lever with temperature stop. Integrated flush technology which activates 24 hours after the last use. The tap also includes a safety switch-off feature, if you require additional functionality, such as sensor range adjustment and tap run time, a bi-directional remote is available as an extra.

Supplied with control electronics, solenoid valve cartridge Supplied with 6V lithium battery and sensor Flow rate at 3 bar: 0.08l per second Dimensions: 140 x 50 x 163mm

F5EM1001	F5E pillar mixer
Complimentar	y Accessories;
SD01-003	Pillar soap dispenser (chrome)
AC17-047	TMV3
AC01-001	Handheld programmer





#### F5L-MIX PILLAR MIXER - THERMAL PURGE ENABLED

F5L-Mix single-lever mixer as pillar mixer manufactured from brass with chrome finish. Mixing cartridge with ceramic disc technology and thermostatic protection from scalding, permanently set to 41 °C and with safety switch-off in the event of failure of the cold water supply. With a mechanism for an optional hygiene unit for automatic hygiene flushing and program-controlled thermal disinfection. For connection to hot water and cold water via hoses, includes strainers. All-metal construction, high-polished chromium-plated brass.

Anti-theft aerator, SLIM design. Spout projection 100mm.


Flow rate at 3 bar: 5.0 l/min. Dimensions: 50 x 135 x 100mm

F5LT1001	F5L Pillar mixer
Complimen	itary Accessories;
ACLX1001	Hygiene unit for on-wall installation
ACLX1005	Hygiene unit for in-wall installation
SD01-003	Pillar soap dispenser (chrome)
AC17-047	TMV3

Taps and spouts

# Taps and spouts






#### F3E BIB TAP

F3E bib tap DN 15 wall mounted & sensor operated. For connection to pre-mixed hot or cold water. Control electronics, solenoid valve cartridge, 6 V lithium battery (CR-P2) all housed in the high-polished chromium-plated brass tap body. Hygiene flushing 24 hours after last activation, safety cut-out and saving of statistical data. Flow rate at 3 bar: 6.0 l/min. Dimensions: 50 x 50 x 210mm

F3EV1004	F3E bib tap
Mandatory Accesso	ries;
AC17-047	TMV3
Complimentary Acc	essories;
SD01-001	Wall mounted soap dispenser (chrome)






#### F3S SELF-CLOSING BIB TAP

F3S self-closing bib tap DN 15 for wall mounting for sanitary facilities. Self-closing cartridge, hydraulically controlled, piston-f ree design, self-closing, stepless adjustment of flow duration. For connection to pre-mixed hot water or cold water. Casing, highpolished chromium-plated brass.

Flow rate at 3 bar: 3.0 l/min. Spout projection: 100mm

F3SV1102	F3S self-closing bib tap	
Mandatory Access	ories;	
AC17-047	TMV3	
Complimentary Ac	cessories;	
SD110	Wall mounted soan dispenser	






#### BEVO LEVER MIXER BASIN TAP

Iconic from every angle. A basin tap manufactured in a brushed steel finish, designed to meet the highest design standards. Timeless elegance in exceptional architecture. Features include: KWC cartridge M 35 H with ceramic discs Flow rate 5 l/min (3 bar)

spout projection. 225mm	
11.422.064.177	Lever mixer brushed finish
Mandatory Accessories;	-
39.001.401.931	Concealed unit
Complimentary Accessorie	es;
AC00-030	Soap dispenser - stainless steel
AC17-047	TMV3
	•





#### BEVO LEVER MIXER BASIN TAP - BLACK


Iconic from every angle. A basin tap manufactured with a black finish, designed to meet the highest design standards. Timeless elegance in exceptional architecture. Features include: KWC cartridge M 35 H with ceramic discs Flow rate 5 l/min (3 bar) Spout projection: 225 mm

11.422.064.176	Lever mixer Black
Mandatory Accessories	
39.001.401.931	Concealed unit
Complimentary Accesso	ories;
AT10-080	Soap dispenser - Black PVD coated
AC17-047	TMV3



# Self closing and anti-block outlets






#### **F3S SELF CLOSING BIB TAP**

F3S self-closing DN 15 bib tap for sanitary facilities. Self-closing cartridge, hydraulically controlled, self-closing, adjustable flow duration. With anti-blocking system 2 (ABS2) for safety switch-off when permanently active. For connection to pre-mixed hot water or cold water. High-polished, chrome-plated brass housing. Aerator with an integrated flow rate controller 3.0 l/min

F3SV1005	F3S Bib tap
Mandatory A	Accessories;
AC17-047	TMV3
Compliment	ary Accessories;
SD01-001	Wall mounted soap dispenser (chrome)






#### F3S SELF-CLOSING BIB TAP WITH ANTI-BLOCK

F3S self-closing bib tap DN 15 with anti-twist protection for sanitary facilities. Especially suitable for facilities at risk of vandalism. Self-closing cartridge, hydraulically controlled, self-closing, adjustable flow duration and anti-blockinng system 2 (ABS2) for safety switch-off in case of continuous operation. For connection to pre-mixed hot water or cold water. Rosette diameter 90 mm for visible front mounting, with anti-twist protection for bib tap and mounting material. All-metal construction, polished, chromium-plated brass. Anti-theft aerator with integrated flow regulator 6.0 l/min.

F3SV1011	F3S Self-closing bib tap with anti-block	
Compliment	ary accessories:	
SD300	Heavy duty wall mounted soap dispenser	






#### F3S SELF-CLOSING PILLAR TAP WITH ANTI-BLOCK

F3S self-closing DN 15 pillartap for sanitary facilities. Self-closing cartridge, hydraulically controlled, self-closing, stepless adjustment of flow duration. With anti-blocking system 2 (ABS2) for safety switch-off when permanently active. For connection to pre-mixed hot water or cold water. High-polished, chrome-plated brass housing. Aerator with an integrated flow rate controller 3.0 l/min.

F3SV1004	F3S self-closing pillar tap with anti-block
Mandatory A	Accessories;
AC17-047	TMV3
Compliment	ary Accessories;
SD110	Wall mounted soap dispenser






#### SELF-CLOSING WALL-MOUNTED MIXER FOR REAR PANEL MOUNTING

F5S-Mix is a self-closing wall-mounted mixer with angled outlet, ideal for high-risk vandalism areas. It features FRAMIC self-closing mixer cartridge, ceramic disc technology, flow pressure-independent design, and adjustable temperature stop. It is made of polished, chromium-plated brass and comes with an anti-theft aerator with an integrated flow regulator. It can be connected to hot and cold water and is suitable for wall thicknesses from 50 to 240 mm.

F5SM1012	Self-closing wall-mounted mixer
Compliment	ary accessories:
SD300	Heavy duty wall mounted soap dispenser






#### F3S-MIX SELF-CLOSING PILLAR TAP WITH ANTI-BLOCK

F3S-Mix self-closing DN 15 pillar mixerfor sanitary facilities. Selfclosing cartridge, hydraulically controlled, self-closing, stepless adjustment of flow duration. With anti-blocking system 2 (ABS2) for safety switch-off when permanently active. For connection to hot and cold water via hoses with integrated non-return valves and strainers. Temperature lever with an adjustable turn-proof temperature stop. High-polished, chrome-plated brass housing. Aerator with an integrated flow rate controller 3.0 l/min.

F3SM1008	F3S Mix self closing pillar mixer with anti-block
Mandatory A	Accessories;
39.001.401.9	31 Concealed unit
Compliment	ary Accessories;
AC00-030	Soap dispenser - stainless steel
AC17-047	TMV3





#### NON CONCUSSIVE TAP

The basin mounted push tap is designed for use with our range of thermostatic mixing valves. With a simple, non-concussive operation and water saving technology this tap is ideal for use in areas such as leisure and commercial washrooms. The simple operation of the push tap enables users with limited mobility to use the facility. Supplied with red and blue indicator options.

MT00-030	Non cocussive tap (single)
Compliment	ary Accessories;
AC17-047	TMV3

Taps and spouts

# A SPLASH OF COLOUR

# PVD coated sensor taps



#### THE KINGSWEAR

This range of modern, minimalistic and highly practical removable spouts are designed for the most demanding healthcare environments. The spout quickly and easily removes for servicing, ensuring minimal disruption. With a 316 Stainless Steel solid body, smooth flow channels and easy to clean shape, the Kingswear spout maintains high levels of hygiene to reduce cross contamination. The twist and lock mechanism ensures quick and easy removal of the kingswear spouts from the mounting spigot for efficient, disruption-free cleaning and maintenance. Available in gold, satin and black PVD coating.

AT10-023	Kingswear 60 tap - Black
Mandatory acce	ssories:
AT00-221	Single station mains kit
AC17-047	TMV3
AT10-033	Programmable sensor - Black

#### THE KINGSWEAR

This range of modern, minimalistic and highly practical removable spouts are designed for the most demanding healthcare environments. The spout quickly and easily removes for servicing, ensuring minimal disruption. With a 316 Stainless Steel solid body, smooth flow channels and easy to clean shape, the Kingswear spout maintains high levels of hygiene to reduce cross contamination. The twist and lock mechanism ensures quick and easy removal of the kingswear spouts from the mounting spigot for efficient, disruption-free cleaning and maintenance. Available in gold, satin and black PVD coating.

AT10-025	Kingswear 60 tap - Gold
Mandatory acces	ssories:
AT00-221	Single station mains kit
AC17-047	TMV3
AT10-035	Programmable sensor - Gold

#### THE KINGSWEAR

This range of modern, minimalistic and highly practical removable spouts are designed for the most demanding healthcare environments. The spout quickly and easily removes for servicing, ensuring minimal disruption. With a 316 Stainless Steel solid body, smooth flow channels and easy to clean shape, the Kingswear spout maintains high levels of hygiene to reduce cross contamination. The twist and lock mechanism ensures quick and easy removal of the kingswear spouts from the mounting spigot for efficient, disruption-free cleaning and maintenance. Available in gold, satin and black PVD coating.

AT07-104	Kingswear 60 tap - Satin
Mandatory acces	sories:
AT00-221	Single station mains kit
AC17-047	TMV3
AC02-021	Programmable sensor - Satin

#### **PROGRAMMABLE**

Options include adjustable run-on times, sensor range, hygiene purges and more.

#### COMPATIBLE

Programmable sensors are compatible with all DVS electronic taps, showers, WCs and urinals ranges.

#### COLOURFUL

The sensors have been designed to match the range of colourful taps. Available in gold, satin and black with a brushed finish. The traditional stainless colour is also available.

#### **EFFICIENT**

Real time data captured from the intelligent sensors can be uploaded using the DVS branded hand held programmer via the USB port. Allowing accurate monitoring of water efficiency.

#### HYGIENIC

The sensors promote excellent hygiene in any washroom environment and are completely touch-free. A simple hand wave motion will activate the sensor.



# F7 Taps



#### **F7 - PREVIEW 2024**

#### SEAMLESS STAINLESS STEEL WITH BLUETOOTH CONNECTIVITY

Our new F7 range is a first taste of the new, contactless design tap. Their minimalist, slender shape impresses with many innovative highlights. The opto-electronic sensor, in combination with an optional connectivity module, has a Bluetooth connection so that you can customise the settings using the Smart Connect App. The solid stainless steel housing with brushed surface has no joints or gaps, making it particularly hygienic and easy to clean.

# F7E in 4 versions with and without mixer function and 2 sizes M and XL



F7E Electronic pillar tap (M)

F7EV1001 / 3600001255



F7E Electronic pillar tap (XL)

F7EV1002/3600001258



F7E-MIX Electronic pillar mixer (M)

F7EM1001/3600001257



F7E-MIX Electronic pillar mixer (XL)

F7EM1002/3600001259




Connectivity module

ACEX9020 / 3600001331

## Tap controls and accessories






#### TAP CONTROL SYSTEM - WAVE-ON

One or two station tap control system kit complete with wave on sensors. Designed to be wall mounted. Mains operated 230V. Ability to control valves for 1 or 2 spouts, or hot and cold valves for single spout. Manually adjustable setting options include run on times, hygiene purges and lock outs. Kit includes:

AT07-001 Tap control system for 1 or 2 taps AC17-101 Anti-microbial plastic valve 12v DC AC02-013 50mm chrome wave on sensor with 3 metre cable

AT07-010	Wave-on tap control system one station
AT07-011	Wave-on tap control system two station






#### TAP CONTROL SYSTEM - TACTILE

One or two station tap control system kit complete with tactile sensors. Designed to be wall mounted. Mains operated 230V. Ability to control valves for 1 or 2 spouts, or hot and cold valves for single spout. Manually adjustable setting options include run on times, hygiene purges and lock outs. Kit includes:

AT07-001 Tap control system for 1 or 2 taps AC17-101 Anti-microbial plastic valve 12v DC AC02-046 Tactile switch with 50mmø stainless bezel & blue insert AC02-047 Tactile switch with 50mmø stainless bezel & red insert

AT07-012	Tactile tap control system one station
AT07-013	Tactile tap control system two station





#### THERMOSTATIC MIXING VALVE 4IN1 - 15/22MM

A highly advanced TMV3 approved thermostatic mixing valve for use in basin, shower, bidet and high pressure bath fill applications (above 1 bar). The valve is designed to control the mixed water outlet temperature to within +/- 2°C regardless of fluctuations in the temperature and pressure of the hot and cold water supplies. The valve will also shut the mixed water outlet instantly in case of hot or

Factory temperature setting: 41-43°C – Temperature setting range: 38-46°C - Temperature, hot supply: 52-65°C - Temperature, cold supply: 5-20°C - Minimum hot to mix differential temperature: 10°C - Temperature stability: +/- 2°C - Working pressure, static: 16 bar max – Working pressure: 0.2-5 – Maximum pressure loss ratio: 10:1 – Flow rate, minimum: 4 lpm – Flow rate @ 1 bar pressure loss: 21

AC17-047 Thermostatic Mixing Valve 4in1 – 15/22mm










#### HANDHELD PROGRAMMER

The Handheld Programmer allows quick and easy adjustment of settings including; run-on time, range, purge and more. Real time data can be uploaded from the programmer via the USB port to allow accurate monitoring of water efficiency. This programmer is compatible with the full range of programmable sensors and taps, including the F3 and F5 range.

Dimensions: 94 x 159 x 25mm

AC01-001 Handheld programmer

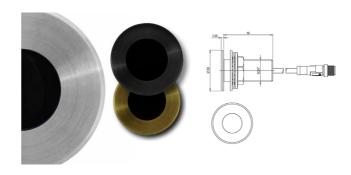


#### KINGSWEAR PROGRAMMABLE TAP SENSORS

Kingswear range of programmable tap sensors compatible with the handheld programmer and the full Kingswear collection. The system allows for customisation of tap settings including sensor sensitivity, run-on times, anti-vandal lock-outs and hygiene

AC02-017	Programmable tap sensor - Satin
AT10-030	Programmable tap sensor - Black
AT10-032	Programmable tap sensor - Gold
AC01-001	Handheld programmer
AC04-030	6V water isolation system

No control box required, Suitable for use with the station kits listed below





#### PROGRAMMABLE TAP SENSORS

A range of programmable tap sensors compatible with the handheld programmer. The system allows for customisation of tap settings including sensor sensitivity, run-on times, anti-vandal lockouts and hygiene flushing.

AC02-017	Programmable tap sensor
AC02-024	Blue (cold) programmable tap sensor
AC02-025	Red (hot) programmable tap sensor
AC01-001	Handheld programmer
AC04-030	6V water isolation system

No control box required, Suitable for use with the station kits



#### ANTI-MICROBIAL STATION KITS

Anti-microbial station kits for touch-free outlets. Designed for standard pressure systems (1-7 BAR). The kit includes mains PSU and 6 Volt DC latching valve. All wetted parts are anti-microbial and Biomaster protected.

AT00-220	Single station kit - Battery
AT00-221	Single station kit - Mains
AT00-222	Two station kit - Mains
AT00-223	Three station kit - Mains

#### LOW PRESSURE STATION KITS

AT00-005 brass valve	Single station battery kit low pressure - 0.5 - 1 BAR
AT00-006 brass valve	Single station mains kit low pressure - 0.5 - 1 BAR
AT00-007 brass valve	Two station mains kit low pressure - 0.5 - 1 BAR
AT00-008 brass valve	Three station mains kit low pressure - 0.5 - 1 BAR



# Washbasins and washtroughs

Discover the excellence of KWC DVS with our array of stainless steel and solid surface composite washbasins and washtroughs.

Our Miranit composite, solid surface basins offer a fusion of sleek lines and stylish aesthetics. Available in various sizes and shapes, these basins seamlessly integrate into public, semi-public or domestic spaces. Miranit is known for its durability, from the elegance of hotel bedrooms to the efficiency of stadia and airports, this material withstands the test of time. Its hard-wearing nature makes it a versatile choice suitable for an array of applications, sizes, and environments.

For high-traffic settings, KWC DVS stainless steel sinks prove their mettle. Boasting resilience and easy maintenance, these sinks minimise service costs whilst maintaining their pristine appearance.

# QUADRO single washbasin the distinctive shape of modern washroom design QUADRO single washbasin ANMW411 **QUADRO** double washbasin ANMW421 **QUADRO** multiple washbasin ANMW431 2100 x 530mm

# QUADRO & RONDA


#### Distinctive shapes for a harmonious effect

The elegant circular shape of the RONDA washbasins was cut on a line running parallel to the wall. Its visually pleasing shape fits into any washroom and offers generous bowl space for cleaning. Its flat rear edge and an apron height of just 60mm, give the multiple wash systems a modern yet delicate appearance. The RONDA's timeless and appealing design makes it particularly attractive as a recessed washbasin.


**RONDA** single washbasin Elegant, delicate, modern



**RONDA** single washbasin ANMW211



**RONDA** double washbasin ANMW221




**RONDA** multiple washbasin ANMW231

All washbasins are also available without a tap hole.



# Washbasins and washtroughs






#### QUADRO WASHBASIN WITH ONE TAP HOLE

QUADRO single washbasin made of MIRANIT resin-bonded mineral material, with smooth, pore-free surface (temperatureresistant up to 80 °C). Colour Alpine white. With seamless, rectangular bowl without overflow. Mounting on washbasin back panel. Rear contoured edge. Three-sided apron 60mm (H). Mounting material included.

Without overflow Bowl dimensions: 520 x 90 (max depth) x 375mm Washbasin dimensions: 600 x 60 x 530mm

Colour: Alpine white

ANMW410	Without tap holes
ANMW411	With tap hole
Mandatory a	ccessories:
ZANMW900	Dome waste valve DN 32
OR	
ZANMW901	Strainer waste valve DN 32




#### QUADRO WASHBASIN WITH TWO TAP HOLES

QUADRO double washbasin made of MIRANIT resin-bonded mineral material, with smooth, pore-free surface (temperatureresistant up to 80 °C). Colour Alpine white. With seamless, rectangular bowl without overflow. Mounting on washbasin back panel. Rear contoured edge. Three-sided apron 60mm (H). Mounting material included.

Colour: Alpine white Without overflow Bowl dimensions: 580 x 90 (max depth) x 360mm Washbasin dimensions: 1400 x 60 x 530mm

ANMW420	Without tap holes
ANMW421	With tap holes
Mandatory a	ccessories:
ZANMW900	Dome waste valve DN 32
OR	
ZANMW901	Strainer waste valve DN 32




#### QUADRO TRIPLE WASHBASIN

QUADRO triple washbasin made of MIRANIT resin-bonded mineral material, with smooth, pore-free surface (temperature-resistant up to 80 °C). Colour Alpine white. With seamless, rectangular bowl without overflow. Mounting on washbasin back panel. Rear contoured edge. Three-sided apron 60mm (H). Mounting material

Colour: Alpine white Without overflow Bowl dimensions: 580 x 90 (max depth) x 360mm Washbasin dimensions: 2100 x 60 x 530mm

	August 1 - 1 - 1
ANMW430	Without tap holes
ANMW431	With tap holes
Mandatory a	ccessories:
ZANMW900	Dome waste valve DN 32
OR	
ZANMW901	Strainer waste valve DN 32





#### **RONDA SINGLE WASHBASIN**


Colour: Alpine white

RONDA single washbasin made of MIRANIT resin-bonded mineral material with smooth and pore-free surface (temperature-resistant up to 80 °C). Colour Alpine white. With seamless round bowl, flattened out at the rear, without overflow. Mounting on washbasin back panel. Rear contoured edge. Three-sided apron 60mm (H). Mounting material included.

Without overflow Bowl dimensions: 520 x 90 (max depth) x 380mm Washbasin dimensions: 600 x 60 x 530mm

**ANMW210** Without tap holes ANMW211 With tap hole Mandatory accessories: **ZANMW900** Dome waste valve DN 32 **ZANMW901** Strainer waste valve DN 32





#### RONDA DOUBLE WASHBASIN

RONDA double washbasins made of MIRANIT resin-bonded mineral material with smooth and pore-free surface (temperatureresistant up to 80 °C). Colour Alpine white. With seamless round bowl, flattened out at the rear, without overflow. Mounting on washbasin back panel. Rear contoured edge. Three-sided apron 60mm (H). Mounting material included.

Bowl dimensions: 540 x 90 (max depth) x 380mm Washbasin dimensions: 1400 x 60 X 530mm

ANMW220 Without tap holes ANMW221 With tap holes Mandatory accessories: **ZANMW900** Dome waste valve DN 32 **ZANMW901** Strainer waste valve DN 32



#### **RONDA TRIPLE WASHBASIN**

Colour: Alpine white

RONDA triple washbasin made of MIRANIT resin-bonded mineral material with smooth and pore-free surface (temperatureresistant up to 80 °C). Colour Alpine white. With seamless round bowl, flattened out at the rear, without overflow. Mounting on washbasin back panel. Rear contoured edge. Three-sided apron 60mm (H). Mounting material included.


Without overflow Bowl dimensions: 537 x 90 (max depth) x 380mm Washbasin dimensions: 2100 x 60 x 530mm

ANMW230	Without tap holes
ANMW231	With tap holes
Mandatory a	ccessories:
ZANMW900	Dome waste valve DN 32
OR	
ZANMW901	Strainer waste valve DN 32

Washbasins and washtroughs Washbasins and washtroughs

# NEW Brixham solid surface washbasins






#### BRIXHAM SQUARE WASHBASIN WITH TAP HOLE

The Brixham square countertop basin with one tap hole, is made of durable MIRANIT resin-bonded mineral material and has a porefree surface that is easy to clean and maintain. It can withstand temperatures up to  $80^{\circ}\text{C}$  and has a seamless bowl design without an overflow. This basin is a great choice for those who want a hygienic and modern-looking option for their bathroom.

Colour: Beige

SW00-103	Brixham square basin 500x430x160mm		
Mandatory a	ccessories:		
SW00-044	1 1/4" Plastic bottle trap		
SW00-049	1 1/4" Strainer waste - unslotted		
OR			
ZANMW900	1 1/4" Dome waste - Chrome		






#### BRIXHAM SQUARE WASHBASIN WITH TAP HOLE

The Brixham square countertop basin with one tap hole, is made of durable MIRANIT resin-bonded mineral material and has a porefree surface that is easy to clean and maintain. It can withstand temperatures up to  $80^{\circ}\text{C}$  and has a seamless bowl design without an overflow. This basin is a great choice for those who want a hygienic and modern-looking option for their bathroom.

Colour: Schwartz Black

SW00-102	Brixham square basin 500x430x160mm
Mandatory ac	cessories:
SW00-044	1 1/4" Plastic bottle trap
SW00-049	1 1/4" Strainer waste - unslotted
OR	
ZANMW900	1 1/4" Dome waste - Chrome






#### BRIXHAM CIRCULAR WASHBASIN

The Brixham circular countertop basin is made of durable MIRANIT resin-bonded mineral material and has a pore-free surface that is easy to clean and maintain. It can withstand temperatures up to 80°C and has a seamless bowl design without an overflow. This basin is a great choice for those who want a hygienic and modern-looking option for their bathroom.

Colour: Beige

SW00-101	Brixham circular basin diameter 465mm	
Mandatory a	ccessories:	
SW00-044	1 1/4" Plastic bottle trap	
SW00-049	1 1/4" Strainer waste - unslotted	
OR		
ZANMW900	1 1/4" Dome waste - Chrome	





#### BRIXHAM CIRCULAR BASIN

The Brixham circular countertop basin is made of durable MIRANIT resin-bonded mineral material and has a pore-free surface that is easy to clean and maintain. It can withstand temperatures up to 80°C and has a seamless bowl design without an overflow. This basin is a great choice for those who want a hygienic and modern-looking option for their bathroom.

Colour: Schwartz Black

SW00-100	Brixham circular basin diameter 465mm	
Mandatory ad	ccessories:	
SW00-044	1 1/4" Plastic bottle trap	
SW00-049	1 1/4" Strainer waste - unslotted	
OR		
ZANMW900	1 1/4" Dome waste - Chrome	

# Washbasins and washtroughs




#### 2 PERSON MIRANIT WASHTROUGH WITH TAP HOLES

Made from Miranit resin bonded mineral material, with an alpine white, smooth gelcoat surface temperature resistant up to 80°C. The seamlessly moulded trough and pore-free surface make the Miranit SOLX washtroughs extremely hygienic and easy to clean, whilst the fracture proof robust material makes them ideal for high usage areas. Integral back panel with brackets and fixing holes for wall mounting, and can either be left as a floating unit or integrated with vanity unit to hide pipework and plumbing materials. 32mm waste kit with overflow is included. Soap dispenser holes can be drilled upon request.

Dimensions:  $1200 \times 170 \times 480 \text{mm}$ 

SOLX1200T With 2 tap holes
SOLX1200 Without tap holes




#### 3 PERSON MIRANIT WASHTROUGH WITH TAP HOLES

Made from Miranit resin bonded mineral material, with an alpine white, smooth gelcoat surface temperature resistant up to 80°C. The seamlessly moulded trough and pore-free surface make the Miranit SOLX washtroughs extremely hygienic and easy to clean, whilst the fracture proof robust material makes them ideal for high usage areas. Integral back panel with brackets and fixing holes for wall mounting, and can either be left as a floating unit or integrated with vanity unit to hide pipework and plumbing materials. 32mm waste kit with overflow is included Soap dispenser holes can be drilled upon request.

Dimensions: 1800 x 170 x 480mm

SOLX1800T With 3 tap holes
SOLX1800 Without tap holes




#### 4 PERSON MIRANIT WASHTROUGH WITH TAP HOLES

Made from Miranit resin bonded mineral material, with an alpine white, smooth gelcoat surface temperature resistant up to 80°C. The seamlessly moulded trough and pore-free surface make the Miranit SOLX washtroughs extremely hygienic and easy to clean, whilst the fracture proof robust material makes them ideal for high usage areas. Integral back panel with brackets and fixing holes for wall mounting, and can either be left as a floating unit or integrated with vanity unit to hide pipework and plumbing materials. 32mm waste kit with overflow is included. Soap dispenser holes can be drilled upon request.

Dimensions: 2400 x 170 x 480mm

SOLX2400T With 4 tap holes
SOLX2400 Without tap holes






#### 1200MM PLANOX WASHTROUGHS

PLANOX seamless welded washtrough for wall mounting, chromium nickel steel, satin finished surface, material thickness of washtrough 0.8mm/side panels 1.2mm, side panels with integrated wall brackets, lowered tap ledge 80mm, 40mm rear upstand, central waste, G 1 1/2 B strainer waste, includes mounting materials. Special lengths are available on request.

Soap dispenser holes can be drilled upon request Dimensions:  $1200 \times 210 \text{mm}$  (W x H)

PL12T-UK	With 2 tap holes	442mm depth	
PL12-UK	Without tap holes	382mm depth	





#### **1800MM PLANOX WASHTROUGHS**

PLANOX seamless welded washtrough for wall mounting, chromium nickel steel, satin finished surface, material thickness of washtrough 0.8mm/ side panels 1.2mm, side panels with integrated wall brackets, lowered tap ledge 80mm, 40mm rear upstand, central waste, G 1 1/2 B strainer waste, includes mounting materials. For a length of 1800mm or more, an additional bracket is supplied. Special lengths are available on request.

Soap dispenser holes can be drilled upon request Dimensions: 1800 x 210mm (W x H)

PL18T-UK	With 3 tap holes	442mm depth	
PL18-UK	Without tap holes	382mm depth	



#### 2400MM PLANOX WASHTROUGHS

PLANOX seamless welded washtrough for wall mounting, chromium nickel steel, satin finished surface, material thickness of washtrough 0.8mm / side panels 1.2mm, side panels with integrated wall brackets, lowered tap ledge 80mm, without tap holes or overflow, 40mm rear upstand, central waste, G 1 1/2 B strainer waste, includes mounting materials. For a length of 1800mm or more, an additional bracket is supplied. Special lengths are available on request.

Soap dispenser holes can be drilled upon request Dimensions:  $2400 \times 210$ mm (W x H)

PL24T-UK	With 4 tap holes	442mm depth	
PL24-UK	Without tap holes	382mm depth	

#### OTHER SIZES ARE AVAILABLE

PL6T-UK	600mm with tap deck & 1 taphole
PL6-UK	600mm with no tap deck/taphole
PL8T-UK	800mm with tap deck and 1 taphole
PL8-UK	800mm with no tap deck/tapholes
PL16T-UK	1600mm with tap deck and 2 tapholes
PL16-UK	1600mm with no tap deck/tapholes
PL30T-UK	3000mm with tap deck and 5 tapholes
PL30-UK	3000mm with no tap deck/tapholes


#### SPARE SHROUDS

PL-SHROUD LRG	Trap shroud for Planox troughs with tap deck
PL-SHROUD SML	Trap shroud for Planox troughs without tap deck

Leg underframes available upon request

## Washbasins and washtroughs






#### SISSONS ROUND 305MM RIMMED EDGE INSET WASH BASIN

Round 305mm diameter rimmed edge inset wash basin. Manufactured from 1.2mm thick grade 1.4301 (304) stainless steel. Prepared for 32mm waste outlet and overflow. Designed with no tap holes therefore taps can be fitted through the worktop or wall mounted. Supplied with fixing adhesive. Waste kit sold separately.

Dimensions: 355 x 160 x 355mm

D20140N	Inset wash basin
Mandatory o	accessories:
F2117	32mm waste, plug, chain and overflow
Compliment	ary accessories:
F6005	Overflow stopper






#### SISSONS 310MM INSET WASH BASIN WITH TAP LANDING

310mm diameter inset wash basin with tap landing Inset hand washbasin which can be mounted from top or underneath. Manufactured from 1.2mm thick grade 1.4301 (304) stainless steel. Prepared for 32mm waste outlet and overflow hole with two tap holes in the rear ledge behind the bowl - suitable for basin taps only (deck mixers cannot be fitted). Supplied with fixing clips for insetting into worktops. Waste kit sold separately

Bowl Dimensions: 310 dia. x 160mm depth Dimensions: 400 x 138 x 400mm

D20170N	Inset wash basin
Mandatory o	iccessories:
F2117	32mm waste, plug, chain and overflow
F1329N	Lever basin taps
F1080N	Crosshead basin taps






#### SISSONS MODEL B 290MM WALL MOUNTED WASHBASIN WITH APRON

Model B 290mm diameter wall mounted washbasin with apron. Manufactured from 0.9mm thick grade 1.4301 (304) stainless steel with a high polished finish. The basin is prepared for 32mm waste outlet and is supplied with two tap holes in the rear ledge, and an overflow. The basin is wall mounted using the fixing holes provided in both the rear up-stand and the rear apron fixing brackets for extra security. Screws and plugs are not supplied.

Dimensions: 340 x 185 x 345mm

D20162N	Wash basin	
Mandatory	Mandatory accessories:	
F1329N	Lever basin taps	
F1080N	Crosshead basin taps	








#### ANIMA KNEE OPERATED WASHBASIN

Knee operated wash hand basin is manufactured from stainless steel - satin polish finish, material thickness 0.9mm. Supplied complete with water spout positioned in rear right hand corner and 32mm waste outlet. Note: The pre-mixing valve and the pipework linking the water spout to the knee operated front panel is all supplied with the washbasin. Wall mounted by fitting a top joggle strip under the upstand return and by screw fixing through the integral rear brackets. Screws and plugs are not supplied.

IMAGE AND DRAWING ILLUSTRATES ANMX216 VERSION.





#### SISSONS MODEL A 240MM WALL MOUNTED WASHBASIN WITH APRON

Model a 240mm diameter wall mounted washbasin with apron. Manufactured from 0.9mm thick grade 1.4301 (304) stainless steel with a high polished finish. The basin is prepared for 32mm waste outlet and is supplied with two tap holes in the rear ledge, without an overflow. The basin is wall mounted using the fixing holes provided in both the rear up-stand and the rear apron fixing brackets for extra security. Screws and plugs are not supplied.

Dimensions: 290 x 157 x 290mm

D20161N	Wash basin
Mandatory	accessories:
F1329N	Lever basin taps
F1080N	Crosshead basin taps









#### ANIMA KNEE OPERATED WASHBASIN

Knee operated wash hand basin is manufactured from stainless steel-satin polish finish, material thickness 0.9mm. Supplied complete with water spout positioned in rearright hand corner and 32mm waste outlet. Note: The pre-mixing valve and the pipework linking the water spout to the knee operated front panel is all supplied with the washbasin. Wall mounted by fitting a top joggle strip under the upstand return and by screw fixing through the integral rear brackets. Screws and plugs are not supplied.

ANMX206	420 x 520 x 380mm

Washbasins and washtroughs Washbasins and washtroughs

# Circular washtroughs



#### SISSONS 6 PERSON CIRCULAR WASHTROUGH


Highly durable and water efficient circular washtrough designed to withstand intensive use in a busy environment. This 6 person circular washtrough is supplied with either self-closing or electronic taps which are designed to save water through the adjustable flow time function. The large floor mounted base provides good stability, and the services are fed from below and can be accessed through a side panel which are fitted with tamper proof security screws. The use of a single water supply and waste has a significant cost saving compared to conventional washbasins which need a water supply and waste for each basin. Delivered fully assembled.

Floor supply services Finish: Satin polished

Taps: 6 taps

Dimensions: 1000 x 1205 x 1000mm

SANX600 With self-closing taps
SANX610 With electronic taps



#### SISSONS 8 PERSON CIRCULAR WASHTROUGH

Highly durable and water efficient circular washtrough designed to withstand intensive use in a busy environment. This 8 person circular washtrough is supplied with either self-closing or electronic taps which are designed to save water through the adjustable flow time function. The large floor mounted base provides good stability, and the services are fed from below and can be accessed through a side panel which are fitted with tamper proof security screws. The use of a single water supply and waste has a significant cost saving compared to conventional washbasins which need a water supply and waste for each basin. Delivered fully assembled.


Floor supply services Finish: Satin polished

Taps: 8 taps

Dimensions: 1300 x 1220 x 1300mm

SANX800 With self-closing taps
SANX810 With electronic taps






#### SISSONS 6 PERSON CIRCULAR WASHTROUGH WITH SOAP DISPENSERS

Highly durable and water efficient circular washtrough designed to withstand intensive use in a busy environment. This 6 person circular washtrough is supplied with either self-closing or electronic taps and self-closing soap dispensers. The large floor mounted base provides good stability, and the services are fed from below and can be accessed through a side panel which are fitted with tamper proof security screws. The use of a single water supply and waste has a significant cost saving compared to conventional washbasins which need a water supply and waste for each basin. Delivered fully assembled.

Floor supply services Finish: Satin polished Taps: 6 taps With soap dispensers

Dimensions: 1000 x 1205 x 1000mm

SANX605 With self-closing taps
SANX615 With electronic taps



### SISSONS 8 PERSON CIRCULAR WASHTROUGH WITH SOAP DISPENSERS

Highly durable and water efficient circular washtrough designed to withstand intensive use in a busy environment. This 8 person circular washtrough is supplied with either self-closing or electronic taps and self-closing soap dispensers. The large floor mounted base provides good stability, and the services are fed from below and can be accessed through a side panel which are fitted with tamper proof security screws. The use of a single water supply and waste has a significant cost saving compared to conventional washbasins which need a water supply and waste for each basin. Delivered fully assembled.


Floor supply services Finish: Satin polished Taps: 8 taps With soap dispensers

Dimensions: 1300 x 1220 x 1300mm

SANX805 With self-closing taps
SANX815 With electronic taps

## Ceramic washbasins





#### WALL HUNG CERAMIC BASIN 380MM

San Ceram wall hung basin manufactured from Vitreous china with an alpine white finish. Designed with a right hand tap hole and is ideal where space is constraint. Complete without overflow and fixings for installation.

Doc M, HBN & HTM Compliant Dimensions: 380 x 175 x 300mm

SW00-047	Basin with right hand tap hole
SW00-048	Basin with left hand tap hole
Mandatory o	iccessories:
SW00-044	1 1/4" Plastic bottle trap
SW00-049	1 1/4" Strainer waste - unslotted
OR	
SW00-050	1 1/4" Press top waste - unslotted






Clinical wall hung basin, manufactured from Vitreous china with an alpine white finish. Designed without tap holes and overflow. Back outlet for increased infection prevention.

HBN & HTM Compliant Dimensions: 500 x 215 x 390mm

SW00-042	Clinical basin
Mandatory a	ccessories:
SW00-044	1 1/4" Plastic bottle trap
SW00-043	Hanaers and waste adaptor






## WALL HUNG CERAMIC BASIN WITH TAP HOLE 500MM

San Ceram wall hung basin manufactured from Vitreous china with an alpine white finish. Designed with a right hand tap hole and is ideal where space is a constraint. Complete without overflow and fixings for installation.

Doc M, HBN & HTM Compliant Dimensions: 500 x 195 x 380mm

Clinical basin with right hand tap hole
iccessories:
Aquarius 45° spout with With PEX hoses
1 1/4" Plastic bottle trap
1 1/4" Strainer waste - unslotted






#### RECTANGULAR LANGLEY BASIN

Rectangular basin manufactured from Vitreous china to BS 3402. Designed to fit any washroom space whether it be contemporary or traditional. With a slim sided appearance, no tap holes or overflow. For installation onto a vanity or worktop. Bottom outlet for ease of maintenance.

Dimensions: 500 x 145 x 360mm

SW00-066	Rectangular basin
Mandatory a	ccessories:
SW00-044	1 1/4" Plastic bottle trap
SW00-049	1 1/4" Strainer waste - unslotted
OR	
SW00-050	1 1/4" Press top waste - unslotted
Complimentary accessories:	
AT03-041	Aquarius high neck tap with PEX hose (15mm)
AT00-220	Single station kit - battery






#### **CIRCULAR LANGLEY BASIN**

Circular basin manufactured from Vitreous china to BS 3402. Designed to fit any washroom space whether it be contemporary or traditional. With a slim sided appearance, no tap holes or overflow. For installation onto a vanity or worktop. Bottom outlet for ease of maintenance.

Dimensions: 420 x 130 x 420 xmm

SW00-067	Circular basin
Mandatory a	iccessories:
SW00-044	1 1/4" Plastic bottle trap
SW00-049	1 1/4" Strainer waste - unslotted
OR	
SW00-050	1 1/4" Press top waste - unslotted
Complimento	ary accessories:
AT03-041	Aquarius high neck tap with PEX hose (15mm)
AT00-220	Single station kit - battery






#### MARDEN SQUARE 460 BASIN CTH

Our SanCeram Marden Square 460mm Basin features a sleek and minimalistic design, perfect for modern washrooms. It comes with a central tap hole and an overflow for added convenience. The basin includes Fisher fixings for easy installation and can be mounted on a vanity or wall hung. Its bottom outlet ensures easy maintenance as well.

Dimensions: 460 x 460 x 150mm

SW00-072	Marden square counter top 460 CTH
Mandatory o	iccessories:
SW00-044	1 1/4" Plastic bottle trap
SW00-049	1 1/4" Strainer waste - unslotted
OR	
SW00-050	1 1/4" Press top waste - unslotted
SW00-043	Hangers and waste adaptor
•••••	

## Ceramic washbasins




#### MARDEN 560MM BASIN

Marden 560mm Under Mounted Basin with no taps. The basin rim is glazed also allowing this basin to be installed as an inset countertop basin. Requires external overflow adaptor.

Doc M, HBN & HTM Compliant Dimensions: 560 x 275 x 135mm

SW00-093	Basin with right hand tap hole
Mandatory a	iccessories:
SW00-044	1 1/4" Plastic bottle trap
SW00-049	1 1/4" Strainer waste - unslotted
OR	
SW00-050	1 1/4" Press top waste - unslotted
Complimento	ary accessories:
AT03-021	Aquarius 45° spout with With PEX hose






#### MARDEN SQUARE SEMI-RECESSED BASIN 460 CTH

Marden square 460mm Semi-recessed Basin with overflow and central tap hole for installation into a vanity top.

Dimensions: 460 x 460 x 150mm

SW00-097	Square semi-recessed basin 460 CTH
Mandatory a	ccessories:
SW00-044	1 1/4" Plastic bottle trap
SW00-049	1 1/4" Strainer waste - unslotted
OR	
SW00-050	1 1/4" Press top waste - unslotted
Complimentary accessories:	
AT03-061	Aquarius high neck tap with PEX hose (15mm)






#### **LANGLEY 400MM BASIN**

Langley 400mm Under Counter Basin with no tap holes. The basin rim is glazed allowing the basin to also be installed as an inset countertop basin. Requires an external overflow adaptor

Doc M, HBN & HTM Compliant Dimensions: 404 x 404 x 195mm

SW00-092	Basin with left hand tap hole
Mandatory accessories:	
SW00-044	1 1/4" Plastic bottle trap
SW00-049	1 1/4" Strainer waste - unslotted
OR	•
SW00-050	1 1/4" Press top waste - unslotted
Complimentary accessories:	
AT03-021	Aquarius 45° spout with With PEX hoses





#### LANGLEY SEMI-RECESSED BASIN

Langley 500mm semi-recessed basin with central tap hole, for installation into a semi-recessed vanity unit.

Dimensions: 500 x 380 x 140mm


SW00-096 Semi-recessed basin 500 CTH

Mandatory accessories:
SW00-049 1 1/4" Strainer waste - unslotted

OR
SW00-050 1 1/4" Press top waste - unslotted

Complimentary accessories:
AT03-061 Aquarius high neck tap with PEX hose (15mm)






#### **CHARTHAM 530 BASIN**

Chartham 530mm countertop basin with central tap hole is the ideal addititon to any modern wsahroom.

Doc M, HBN & HTM Compliant Dimensions: 530 x 435 x 225mm

SW00-114	Basin with right hand tap hole
Mandatory o	iccessories:
SW00-044	1 1/4" Plastic bottle trap
SW00-049	1 1/4" Strainer waste - unslotted
Compliment	ary accessories:
AT03-021	Aquarius 45° spout with With PEX hoses
-	





#### CHARTHAM SEMI-RECESSED BASIN 450 RHTH

Chartham 450mm Semi-recessed basin with right hand tap hole offers a sleek, easy to clean modern design.

Dimensions: 450 x 360 x 185mm

CMOO OOO Comi responded basin AEO DII

24400-096	Semi-recessed basin 450 KH
Mandatory a	iccessories:
SW00-049	1 1/4" Strainer waste - unslotted
OR	
SW00-050	1 1/4" Press top waste - unslotted
Complimento	ary accessories:
AT03-041	Aquarius high neck tap with PEX hose (15mm)



# GLACIER - Customise your options in six steps





#### 1. Choose your mirror set up

Choose between soap, water, air or soap, water, paper depending on requirements. For those who prefer a classic approach, the Glacier unit can be equipped with a paper towel dispenser. Alternatively, the Glacier can incorporate a touch-free hand dryer. Both options are complemented by a built-in soap dispenser and a tap, providing a complete handwashing experience in one convenient location.

#### 2. Basin style

Elevate your restroom with our Brixham Corian Washtrough's sleek durability or the Square Glacier Miranit Wash Basin's contemporary style. Corian offers lasting elegance, while Miranit boasts minimalist appeal. Choose the basin that matches your aesthetic and functional needs, and upgrade your restroom with sophistication and durability.

#### 3. Number of washplaces

WASH STATIONS

AVAILABLE

GLACIER WASHBASIN

Once you have chosen a basin style, customise your restroom with our flexible washplace options, accommodating from one to five basins to suit any space or traffic volume.

Tailor your layout for efficiency and style, ensuring your restroom meets your specific needs without compromise.

#### 4. Mirror width and height

BRIXHAM

WASHTROUGH

After finalising functionality, style, and basin quantity, customise the width and height of your Glacier Unit to perfectly fit your washroom.

Tailor the dimensions precisely to your space, ensuring seamless integration and maximising efficiency. Design your ideal washroom setup with confidence and precision for a flawless result.

#### 5. Colour and finish

Select the perfect colour and finish for your washbasin(s) from our range of 12 standard options, available in high gloss or matte finishes. From classic neutrals to vibrant hues, customise your washroom aesthetic effortlessly.

MIRROR. HEIGHT UP TO 1800MM

800MM AS

STANDARD

MATTE OR GLOSS FINISH

For full colour options, see page 64..

#### 6. Integrate accessories

DRYER

OPERATION

Complete your Glacier solution by incorporating an integrated waste bin option, seamlessly blending functionality with elegance. Choose between circular and square designs to complement your restroom's aesthetic seamlessly. Keep your space tidy and organised while maintaining a cohesive look with this essential addition.

DISPENSER

COLOURS


AVAILABLE

**GLACIER GLACIER** 


MIRROR WIDTH UP TO 1000mm


600mm AS STANDARD


# GLACIER - Custom solutions for any space











#### **GLACIER WASHBASINS**

Washbasins made of MIRANIT resin-bonded mineral material, with smooth, pore-free surface (temperature-resistant up to 80 °C). Standard colour Alpine white (other options available). With seamless, rectangular bowl without overflow. Mounting on washbasin back panel. Rear contoured edge. Three-sided apron 60mm (H). Mounting material included. Mounting material included.

Colour: Alpine white standard (see colours below which are available upon request)

With overflow

Supply with brackets and fixings

Continous flow drain outlet Bowl dimensions: 515 x 365mm


GL60	Single bowl	615mm wide	
GL120	Two bowls	1215mm wide	
GL180	Three bowls	1815mm wide	
GL240	Four bowls	2415mm wide	
GL300	Five bowls	3015mm wide	•

BESPOKE OPTIONS INCLUDING COLOURS, VANITY UNITS AND UP TO 10 BASINS ARE AVAILABLE, PLEASE GET IN TOUCH FOR MORE DETAILS AND FULL SPECIFICATION.

#### OPTIONS AVAILABLE IN GLOSS OR MATTE







#### **BRIXHAM WASHTROUGHS**

Washtroughs manufactured from solid surface material in white. Designed to be wall mounted and used in conjunction with wall mounted taps. Single left handed 1 1/2" waste outlet point Various width options available. Various width options available designed to complement our Glacier mirror system (600mm wide per unit).


Suitable for use with Glacier mirror unit range (see page 112) Cantilever Brackets required (see below)

No Overflow

Flat bottom trough design Vanity units available upon request

# SW00-0681200mm wideSuitable for 2 mirror systemSW00-0691800mm wideSuitable for 3 mirror systemSW00-0702400mm wideSuitable for 4 mirror systemSW00-0713000mm wideSuitable for 5 mirror systemSW00-0751 x Cantilever bracket





#### NEW FOR 2024

#### GLACIER MIRROR UNIT - SOAP, WATER, AIR

Elevate your washroom's aesthetic with our seamless and contemporary mirror systems. The Glacier range offers a perfect fit for any design, effortlessly blending into your space. Whether it's a singular unit and basin or multiple systems side by side, the sleek design complements all washroom types.


With each mirror measuring 600mm wide, our designs are crafted to achieve a seamless look. Embrace the clean lines and sophisticated appeal as these mirrors effortlessly enhance your washroom's ambiance. Upgrade your washroom with the Glacier range and experience the fusion of modernity and simplicity. Let your space shine with these elegantly crafted mirror systems, creating a polished and cohesive look like never before.

Paper towel and hand dryer version available Dimensions: 600 x 800 x 153mm Soap capacity: 2.2L

GLSWA60 SOAP, WATER, AIR

Custom options available please contact our team for more details





#### NEW FOR 2024

#### GLACIER MIRROR UNIT - SOAP, WATER, PAPER

Elevate your washroom's aesthetic with our seamless and contemporary mirror systems. The Glacier range offers a perfect fit for any design, effortlessly blending into your space. Whether it's a singular unit and basin or multiple systems side by side, the sleek design complements all washroom types.


With each mirror measuring 600mm wide, our designs are crafted to achieve a seamless look. Embrace the clean lines and sophisticated appeal as these mirrors effortlessly enhance your washroom's ambiance. Upgrade your washroom with the Glacier range and experience the fusion of modernity and simplicity. Let your space shine with these elegantly crafted mirror systems, creating a polished and cohesive look like never before.

Paper towel and hand dryer version available Dimensions: 600 x 800 x 153mm Soap capacity: 2.2L

#### GLSWP60 SOAP, WATER, PAPER

Custom options available please contact our team for more details  $% \left\{ \left( 1\right) \right\} =\left\{ \left( 1\right) \right\} =\left\{$ 





#### GLACIER WASTE BIN

Glacier waste bin free standing or for wall mounting, stainless steel, surface satin finished, wire thickness 2 mm, square perforated facia pattern, includes stainless steel screws and dowels. Can be mounted under customised Brixham or Glacier solid surface washbasins that have a pre-cut whole for concealed and hygienic paper towel disposal.

Dimensions 440 x 628 x 315 mm (W x H x D)


CHRX607 Waste bin

66 GLACIER GLACIER



## Clinical outlet solutions






#### **F4LT-MED THERMOSTATIC SINGLE LEVER MIXER**

F4LT-Med thermostatic single lever mixer as DN 15 pillar mixer for sanitary facilities in the healthcare and nursing sector, lever length 172mm. Thermostat-controlled mixer cartridge with expansion element and active scald protection, fail-safe against backflow, as well as adjustable and turn-proof temperature stop, and ceramic disc technology. With backflow preventer for optimised drinking water hygiene. Lever cap ergonomically designed in closed construction for contactless lever actuation. For connection to hot water and cold water via pipes, includes strainers. Tap optimised for cleaning, all-metal construction, polished chromium-plated low-lead brass (lead proportion ≤ 0.2%), with volume-reduced water flow without nickel coating. Laminar jet controller with integrated flow rate controller 8.0 l/min, projection 135mm.

F4LT1011	F4LT-MED thermostatic single lever mixer
Complimentar	y accessories:
SW00-045	Wall hung clinical basin 500mm RH tap hole
SW00-043	Hangers & waste adaptor
SW00-044	1 1/4" Plastic bottle trap






#### WALL HUNG CLINICAL BASIN 500MM

Clinical wall hung basin, manufactured from Vitreous china with an alpine white finish. Designed without tap holes and overflow. Back outlet for increased infection prevention.

HBN & HTM COMPLIANT Dimensions: 500 X 215 X 390mm

Billerisions. 300 X 213 X 330mm	
Clinical basin	
Clinical basin right hand tap hole	
Mandatory accessories:	
1 1/4" Plastic bottle trap	
Hangers and waste adaptor	





#### THERMAL DISINFECTION VALVE

The KWC DVS thermal disinfection valve has been designed to aid the prevention biofilm, reducing the risk of water-borne pathogens by allowing thermal disinfection from the TMV through to the outlet (1 x TDV is required per TMV). The valve is suitable for taps, showerheads and other washroom equipment fitted with a TMV.

#### eatures include:

Reduces risk of water-borne pathogens, Simple, single-quarter turn operation, Integral non-return valves to prevent backflow, Corrosion-resistant DZR brass body, Suitable for 22mm and 15mm pipework, Compliant with water regulations and by-laws and WRAS approved.

AC17-080 Thermal Disinfection Valve






#### INFORM CLINICAL OUTLET

INFORM clinical outlet manufactured in 316 stainless steel with a brushed finish. The spout design features an anti-microbial outlet and in-built intelligent thermistor which connects to our INFORM water temperature monitoring device or CMVL8 hygiene flushing unit. Remotely monitor temperatures, control the outlet, thermal purges and fail safe checks all verified. 5 litres per minute integrated flow control. (other flow rates available).

IC02-048	INFORM Outlet 190mm - copper tails
IC02-049	INFORM Outlet 240mm - copper tails
IC03-052	INFORM Outlet A45 - for wall mounted sensor
Mandatory ac	cesories:
IC07-006	INFORM 6 channel control box
IC07-017	INFORM programmable sensor
AC17-047	TMV3 (Not required with IC07-008)
Complimenta	ry accessories:
IC07-008	CMVL8 Control, monitor & verify
SW00-042	Wall hung clinical basin 500mm
SW00-045	Wall hung clinical basin 500mm Right hand tap hole
SW00-043	Hangers & waste adaptor
SW00-044	1 1/4" Plastic bottle trap






#### MEDI-10 90° AUTOCLAVABLE SPOUT

Medi-10 Healthcare Spout™ manfactured in 316 stainless steel with a brushed finish. Designed for healthcare environments with a twist and lock wall mounted spigot mechanism, the spout can easily be removed for servicing for minimal disruption. The spout has been designed to promote and maintain high levels of hygiene with an unrestricted outlet, smooth flow channels and easy to clean shape. The Medi-10 spout can also be autoclaved. Spout projection: 200mm

AT07-101	Medi-10 90° spout - Stainless steel
Mandatory a	iccessories;
AC02-017	Programmable sensor
AT00-221	Single antimicrobial station kit
AC17-047	TMV3
Complimento	ary accessories:
SW00-042	Wall hung clinical basin 500mm
SW00-043	Hangers & waste adaptor
SW00-044	1 1/4" Plastic bottle trap





#### MEDI-10 90° SPOUT FOR POINT OF USE FILTER

Medi-10 Healthcare Spout™ manfactured in 316 stainless steel with a brushed finish. Designed for healthcare environments with a twist and lock wall mounted spigot mechanism, the spout can easily be removed for servicing for minimal disruption. The spout has been designed to promote and maintain high levels of hygiene with an optional adaptor for point of use filters, smooth flow channels and easy to clean shape. The Medi-10 spout can also be autoclaved.


Spout projection: 200mm

AT07-117	Medi-10 90° spout - Stainless steel
Mandatory a	ccessories;
AT00-044	Adaptor for filters - Medi-10
AC02-017	Programmable sensor
AT00-221	Single antimicrobial station kit
AC17-047	TMV3
Complimento	ıry accessories:
SW00-042	Wall hung clinical basin 500mm
SW00-043	Hangers & waste adaptor
SW00-044	1 1/4" Plastic bottle trap

Clinical outlet solutions



# INFORM Outlet



### NEW FOR 2024

### **INFORM OUTLET A45 - INTEGRATED SENSOR**

INFORM Outlet manufactured in 316 stainless steel with a brushed finish. The spout design features an anti-microbial outlet and in-built intelligent thermistor which connects to our INFORM water temperature monitoring device. Remotely monitor temperatures, control the outlet, thermal purges and fail safe checks all verified. 5 litres per minute integrated flow control. (other flow rates available). Outlet projection: 118mm.

IC03-012	INFORM Outlet - Integrated sensor
Mandatory o	accessories:
IC10-066	INFORM Monitor Universal kit
AC17-047	TMV3
Compliment	ary accessories:
SW00-045	Wall hung clinical basin 500mm RH tap hole
	Hangers & waste adaptor
SW00-044	1 1/4" Plastic bottle trap



# INFORM OUTLET 190MM

INFORM clinical outlet manufactured in 316 stainless steel with a brushed finish. The spout design features an anti-microbial outlet and in-built intelligent thermistor which connects to our INFORM water temperature monitoring device or CMVL8 hygiene flushing unit. Remotely monitor temperatures, control the outlet, thermal purges and fail safe checks all verified. 5 litres per minute integrated flow control. (other flow rates available). Outlet projection: 170mm.

IC02-048	INFORM Outlet 190mm
Mandatory o	accesories:
IC07-006	INFORM 6 channel control box
IC07-017	INFORM programmable sensor
AC17-047	TMV3 (Not required with IC07-008)
Compliment	ary accessories:
IC07-008	CMVL8 Control, monitor & verify
SW00-042	Wall hung clinical basin 500mm
SW00-043	Hangers & waste adaptor
SW00-044	1 1/4" Plastic bottle trap



**INFORM** 


# NEW FOR 2024

## **INFORM OUTLET 240MM**

INFORM clinical outlet manufactured in 316 stainless steel with a brushed finish. The spout design features an anti-microbial outlet and in-built intelligent thermistor which connects to our INFORM water temperature monitoring device or CMVL8 hygiene flushing unit. Remotely monitor temperatures, control the outlet, thermal purges and fail safe checks all verified. 5 litres per minute integrated flow control. (other flow rates available). Outlet projection: 220mm.

sories: IFORM 6 channel control box IFORM programmable sensor
IFORM 6 channel control box
IFORM programmable sensor
MV3 (Not required with IC07-008)
accessories:
MVL8 Control, monitor & verify
/all hung clinical basin 500mm
angers & waste adaptor
1/4" Plastic bottle trap





### **NEW FOR 2024**


### **INFORM OUTLET A45 - WALL MOUNTED SENSOR**

INFORM Outlet manufactured in 316 stainless steel with a brushed finish. The spout design features an anti-microbial outlet and in-built intelligent thermistor which connects to our INFORM water temperature monitoring device. Remotely monitor temperatures, control the outlet, thermal purges and fail safe checks all verified. 5 litres per minute integrated flow control. (other flow rates available). Outlet projection: 118mm.

IC03-052	INFORM Outlet A45 - wall mounted sensor
Mandatory o	accesories:
IC07-006	INFORM 6 channel control box
IC07-017	INFORM programmable sensor
AC17-047	TMV3 (Not required with IC07-008)
Compliment	ary accessories:
IC07-008	CMVL8 Control, monitor & verify
SW00-045	Wall hung clinical basin 500mm Right hand tap hole
SW00-043	Hangers & waste adaptor
SW00-044	1 1/4" Plastic bottle trap







# NEW FOR 2024

### CMVL8 CONTROL, MONITOR & VERIFY

The CMVL8 is designed to work in conjunction with the Inform enabled Multi Channel control boxes. Complete with full bore 15mm compression isolation valves, check valves, anti-microbial solenoid valves, temperature sensors and a separate thermostatic mixing valve ready for easy installation.

CMVL8 allows you to carry out Thermal purges through both the outlet & TMV and cold water isolation tests without the need to remove IPS panels or manually operate valves. CMVL8 will also provide detailed, reports with date & time, temperatures etc. to ensure you have the information you need to effectively manage the safety of your water system.

In addition INFORM can provide verification that hot taps are  $\geq 50$  °C (55 °C in healthcare premises) and cold taps are below 20 °C within the times required by HSG274 Part 2.

IC07-008	CMVL8 Control, monitor & verify
Mandatory accesories:	
IC07-006	INFORM 6 channel control box
IC07-017	INFORM programmable sensor





### NEW FOR 2024

# INFORM MONITOR UNIVERSAL KIT

INFORM Monitor tracks water system temperatures, from anywhere in the world. Analyse trends and pinpoint areas for improvement. Make data-driven decisions to optimise efficiency and prioritise upgrades.

Universal kit suitable for any part of your water system. Kit includes all parts required to monitor temperatures.

IC10-066 INFORM Monitor Universal kit

INFORM Outlets

# Configure your ultimate clinical wash station with INFORM

Choose from INFORM Oulet, INFORM Control and our HBN compliant clinical wash basin for the complete solution.



INFORM Outlet IC03-052 A45 IC07-017 Sensor



INFORM Control IC07-008 CMVL8 IC07-006 6CH Controller AC01-001 Programmer



Clinical wash basin RHT SW00-045 Basin RHT SW00-044 Bottle trap SW00-043 Hangers



INFORM Outlet IC02-048 190mm IC07-017 Sensor



INFORM Outlet
IC02-049 240mm
IC07-017 Sensor



INFORM Control
IC07-008 CMVL8
IC07-006 6CH Controller
AC01-001 Programmer



INFORM Control IC07-008 CMVL8 IC07-006 6CH Controller AC01-001 Programmer



Clinical wash basin SW00-042 Basin SW00-044 Bottle trap SW00-043 Hangers



SW00-042 Basin
SW00-044 Bottle trap
SW00-043 Hangers

# Control, Monitor & Verify - CMVL8-01


Wirelessly Control thermal purges & TMV cold water isolation tests.
Remotely monitor time taken for hot and cold water outlets to achieve temperatures.
Verify all relevant data with granular reports.
Control, Monitor & Verify your water system is safe and compliant.



6 INFORM Control



# Surgeon scrub up troughs



# SISSONS 800MM SUH SURGEONS SCRUB UP TROUGH - LEFT HAND

Manufactured from 1.5mm thick grade 1.4301 (304) stainless steel, with a satin finish. The surgeon scrub up trough is supplied with a conventional waste outlet in the base of the trough and shroud to cover pipework. The top and bottom areas of the trough are fixed to the wall using the joggle strips supplied. Please note - wall fixing screws and plugs are not supplied. Manufactured in accordance with HTM 64 / HBN 00-10, Part C Standards.

Mounting: Surface mounted Outlet: Left hand outlet Dimensions: 800 x 400mm

**G22029LN** 800mm Scrub up trough LH

Mandatory accessory:

F2068 38mm flush grated waste



# SISSONS 800MM SUH SURGEONS SCRUB UP TROUGH - RIGHT


Manufactured from 1.5mm thick grade 1.4301 (304) stainless steel, with a satin finish. The surgeon scrub up trough is supplied with a conventional waste outlet in the base of the trough and shroud to cover pipework. The top and bottom areas of the trough are fixed to the wall using the joggle strips supplied. Please note - wall fixing screws and plugs are not supplied. Manufactured in accordance with HTM 64 / HBN 00-10, Part C Standards.

Mounting: Surface mounted Outlet: Right hand outlet Dimensions: 800 x 400mm

G22029RN 800mm Scrub up trough RH

Mandatory accessory:

F2068 38mm flush grated waste



# SISSONS 1600MM SUH SURGEONS SCRUB UP TROUGH - LEFT HAND

Manufactured from 1.5mm thick grade 1.4301 (304) stainless steel, with a satin finish. The surgeon scrub up trough is supplied with a conventional waste outlet in the base of the trough and shroud to cover pipework. The top and bottom areas of the trough are fixed to the wall using the joggle strips supplied. Please note - wall fixing screws and plugs are not supplied. Manufactured in accordance with HTM 64 / HBN 00-10, Part C Standards.

Mounting: Surface mounted Outlet: Left hand outlet Dimensions: 1600 x 400mm

G22030LN 1600mm Scrub up trough LH

Mandatory accessory:

F2068 38mm flush grated waste



# SISSONS 1600MM SUH SURGEONS SCRUB UP TROUGH - RIGHT HAND


Manufactured from 1.5mm thick grade 1.4301 (304) stainless steel, with a satin finish. The surgeon scrub up trough is supplied with a conventional waste outlet in the base of the trough and shroud to cover pipework. The top and bottom areas of the trough are fixed to the wall using the joggle strips supplied. Please note - wall fixing screws and plugs are not supplied. Manufactured in accordance with HTM 64 / HBN 00-10, Part C Standards.

Mounting: Surface mounted Outlet: Right hand outlet Dimensions: 1600 x 400mm

G22030RN 1600mm Scrub up trough RH

Mandatory accessory:

F2068 38mm flush grated waste



# SISSONS 2400MM SUH SURGEONS SCRUB UP TROUGH - LEFT HAND

Manufactured from 1.5mm thick grade 1.4301 (304) stainless steel, with a satin finish. The surgeon scrub up trough is supplied with a conventional waste outlet in the base of the trough and shroud to cover pipework. The top and bottom areas of the trough are fixed to the wall using the joggle strips supplied. Please note - wall fixing screws and plugs are not supplied. Manufactured in accordance with HTM 64 / HBN 00-10, Part C Standards.

Mounting: Surface mounted Outlet: Left hand outlet Dimensions: 2400 x 400mm

G22031LN 2400mm Scrub up trough LH

Mandatory accessory:

**F2068** 38mm flush grated waste



# SISSONS 2400MM SUH SURGEONS SCRUB UP TROUGH - RIGHT HAND

Manufactured from 1.5mm thick grade 1.4301 (304) stainless steel, with a satin finish. The surgeon scrub up trough is supplied with a conventional waste outlet in the base of the trough and shroud to cover pipework. The top and bottom areas of the trough are fixed to the wall using the joggle strips supplied. Please note - wall fixing screws and plugs are not supplied. Manufactured in accordance with HTM 64 / HBN 00-10, Part C Standards.

Mounting: surface mounted Outlet: Right hand outlet Dimensions: 2400 x 400mm

**G22031RN** 2400mm Scrub up trough RH

Mandatory accessory:


**2068** 38mm flush grated waste

Scrub up troughs



# Cleaning and janitorial





### SISSONS HEALTHCARE COMPLIANT JANITORIAL UNIT


Manufactured from 1.2mm thick, grade 1.4301 (304) stainless steel (except for lower bowl - 0.9mm). Supplied complete with lever operated monobloc mixer, With copper tailss, 32mm flush grated waste outlet for top wash bowl and 38mm domed waste (for lower bowl). The janitorial unit can be fixed with 4 legs for floor standing or part wall hung / floor standing by using two of the front legs or alternatively can be fitted as a wall hung unit by using the joggle strip provided. Manufactured in accordance with HTM 64 / HBN 00-10, Part C Standards.

Tap: Monobloc mixer Without overflow

Dimensions:  $500 \times 995 \times 570 \text{mm}$ 

G20055N	Janitorial unit
Compliment	ary accessories:
G20051N	Combination waste kit






### SISSONS STAINLESS STEEL FLOOR STANDING BUCKET SINK

Manufactured from 1.2mm thick, grade 1.4301 (304) stainless steel. Designed with splash back, hinged grating, 38mm BSP waste fitting and complete with integral wall brackets. The bucket sink is supported on two front legs and is held in position by screwing the two integral wall brackets directly to the wall. Screws and wall plugs are not supplied. Stainless steel bucket is not included.

Dimensions: 500 x 800 x 517mm

G21663N	Bucket sink
Complimento	ary accessories:
F1071/3N	Pair of bib taps






## SISSONS PLASTER SINK

Manufactured from 1.2mm thick grade 1.4301 (304) stainless steel, with a satin finish (bowl - 1.5mm). The single bowl incorporates a plaster catcher sump which is prepared for a 38mm waste (waste sold seperately). An integral sump with a removable stainless steel basket prevents loose plaster from entering the waste and causing a blockage. Designed without tap holes, therefore taps should be wall mounted. Stainless steel cantilever brackets and stainless steel front leg supports can be supplied as an extra, no wall fixing are supplied. Manufactured in accordance with HTM 64 / HBN 00-10, Part C Standards.

Bowl dimensions:  $500 \times 400 \times 200/400$ mm Dimensions:  $1200 \times 600$ mm

G22000LN	Left hand drainer
G22000RN	Right hand drainer
Mandatory a	ccessories:
F2068	Flush grated waste 1 1/2"
G26523L/R	Stainless steel cantilever bracket left/right
OR	
G26524L/R	Stainless steel front leg support left/right



# SISSONS DUH HOSPITAL DISPOSAL UNIT


DUH hospital disposal unit manufactured from 1.2mm thick, grade 304 stainless steel with a satin polish finish. Includes a 110mm diameter outlet sluice hopper which can accept a P or S trap (available as an extra). The unit should only be fed from a cistern or tank water supply. Mounted on either stainless steel cantilever brackets or front leg supports with adjustable feet, which give a working height of 900mm. Manufactured in accordance with HTM 64 / HBN 00-10, Part C Standards.

Dimensions: 1,000 x 600 x 900mm

G22016L	Left hand drainer for duct mounted cistern
G22016R	Right hand drainer for duct mounted cistern
G22025L	Left hand drainer for exposed cistern
G22025R	Right hand drainer for exposed cistern

Mandatory and complimentary accessories listed below





### SISSONS DUHS HOSPITAL DISPOSAL UNIT

A DUHS hospital disposal unit manufactured from stainless steel with a satin polish finish. The top is turned down on all four edges and incorporates a wet area recess. Fitted with a 110mm diameter outlet sluice hopper at one end which can accept a P or S trap, (available as an extra). The unit should only be fed from a cistern or tank water supply. Mounted on either stainless steel cantilever brackets or front leg supports with adjustable feet, which give a working height of 900mm. Manufactured in accordance with HTM 64 / HBN 00-10, Part C Standards

Without tap holes or overflow Dimensions: 1600 x 900 x 600mm

G22018L	Left hand drainer for duct mount cistern
G22018R	Right hand drainer for duct mount cistern
G22027L	Left hand drainer for exposed cistern
G22027R	Right hand drainer for exposed cistern

### Mandatory and complimentary accessories listed below

# SISSONS DUH & DUHS ACCESSORIES FOR DUCT MOUNT

vialidatol y ac	cessories.
G26523L	Stainless steel cantilever bracket left
G26523R	Stainless steel cantilever bracket right
OR	•
G26524L	Stainless steel front leg support left
G26524R	Stainless steel front leg support right
	•
B4042	P-trap plastic waste
F3018	9 litre plastic cistern
B3022	Plastic down pipe
F2055	Cistern pull chain & lever

For DUHS only optional;	
F2068	Flush grated waste 1 1/2"
G26542N	Grating for DUHS
-	

# SISSONS DUH & DUHS ACCESSORIES FOR SURFACE MOUNT

For DUHS o	nly optional;
F2055	Cistern pull chain & lever
B4215	Stainless steel down pipe
G20605N	9 litre stainless steel cistern
B4052	P-trap stainless steel waste
UZUJZ4K	Stuffiess steer front leg support fight
G26524R	Stainless steel front leg support right
G26524L	Stainless steel front leg support left
OR	
G26523R	Stainless steel cantilever bracket right
G26523L	Stainless steel cantilever bracket left

Cleaning & Janitorial

# Cleaning and janitorial



### SISSONS INSET WASH BASIN WITH TAP LANDING

Manufactured from 0.9mm thick grade 1.4301 (304) stainless steel. Prepared with 32mm waste outlet and overflow hole, and a rear ledge with two tap holes suitable for either basin taps of mixer taps. Supplied with fixing clips for insetting into worktops. Waste kit is available as an extra.

Finish: Descaled Tap holes: 2 With overflow Waste: Centre

Bowl dimensions: 410 x 265 x 140mm Dimensions: 472 x 390 x 140mm


D20168N Inset washbasin Mandatory accessories:

32mm waste, plug, chain and overflow

Complimentary accessories:

3mm high neck lever taps





### SISSONS SK1 WALL MOUNTED SINGLE BOWL SINK


Manufactured from 1.2mm thick, grade 1.4301 (304) stainless steel with satin polish finish. The sink top is turned down on all four edges and incorporates a wet area recess. The bowl is prepared for a 38mm waste outlet and the sink top can either be mounted on wall brackets or front leg supports (sold separately). NOTE: It is not possible to fit an overflow. Manufactured in accordance with HTM 64 / HBN 00-10, Part C Standards.

Without overflow

Bowl dimensions: 500 x 400 x 200mm Dimensions: 600 x 600 x 218mm

G22002N	Without tap holes
G22002NT	Tap holes: 2 at 200mm centres
Mandatory a	iccessories:
F2068	38mm flush grated waste
G26523L/R	Stainless steel cantilever bracket left/right
OR	
G26524L/R	Stainless steel front leg support left/right
Complimento	ary accessories:
F1074N	3mm high neck lever taps






# SISSONS CLEANERS SINK WITH GRID FOR WALL MOUNTING

Manufactured from 1.5mm thick, grade 1.4301 (304) stainless steel with satin finish. Designed with a seamlessly welded bowl with rounded edges. Incorporates 38mm plug waste with a plastic overflow pipe, drainage back left, 30mm rear up-stand. Supplied with stainless steel grid with rubber bumps, stainless steel screws and

Mounting: Wall mounted Bowl dimensions: 370 x 160 x 340mm Dimensions: 500 x 160 x 500mm

WB500GV Cleaners sink with grid for wall mounting






# SISSONS WALL MOUNTED DOMESTIC SERVICES DISPOSAL

Manufactured from 1.2mm thick, grade 1.4301 (304) stainless steel with satin finish. Incorporates a sluice hopper with a back inlet suitable for wall mounting. The hopper is designed with a 110mm diameter outlet which can accept a P trap (sold separately). The unit should only be fed from a cistern or tank water supply. 6, 7 or 9 litre steel cisterns are available as extras. These are fitted with a 13mm HP brass valve, plastic float and CP metal flushing lever handles. The unit is fixed to the wall using two cantilever brackets and wall fixings (sold separately).

Suitable for surface mounted cisterns Sluice dimensions: 375/110 x 300mm Dimensions: 670 x 300 x 600mm

G22043N	Cleaners sink
Mandatory a	iccessories:
B4052	110mm stainless steel adjustable P trap
G26542N	Stainless steel removable outlet grating 110mm
G20605N	9 litre stainless steel cistern
B4215	Stainless steel downpipe
G26523L/R	Stainless steel cantilever bracket left/right
OR	
G26524L/R	Stainless steel front leg support left/right






# SISSONS WALL MOUNTED DOMESTIC SERVICES DISPOSAL

Manufactured from 1.2mm thick, grade 1.4301 (304) stainless steel with satin finish. Incorporates a sluice hopper with a back inlet suitable for duct mounting. The hopper is designed with a 110mm diameter outlet which can accept a P trap (sold separately). The unit should only be fed from a cistern or tank water supply. A duct mounted 9 litre plastic cistern is available seperately, this is supplied with a plastic downpipe, plastic float and metal flushing lever handles. The unit is fixed to the wall using two cantilever brackets and wall fixings (sold separately). Manufactured in accordance with HTM 64 / HBN 00-10. Part C Standards.

Suitable for duct mounted cisterns Dimensions: 600 x 300 x 600mm

G22041N Bucket sink Mandatory accessories: B4042 White plastic P trap for hospital units G26542N Stainless steel removable outlet grating 110mm F3018 9 litre plastic cistern B3022 Plastic downpipe Stainless steel cantilever bracket left/right G26523L/R Stainless steel front leg support left/right





# SISSONS WALL MOUNTED CLEANERS SINK WITH GRID


Manufactured from grade 1.4301 (304) stainless steel, material thickness 0.9mm, with splash back, hinged grating, 38mm BSP waste fitting and complete with integral wall bracket.

Mounting: Wall mounted Bowl dimensions: 436 x 190 x 300mm Dimensions: 436 x 490 x 339mm

WB440COP-UK Cleaners sink

# Cleaning and janitorial






# SISSONS STAINLESS STEEL SINGLE BOWL, SINGLE DRAINER INSET SINK WITH OVERFLOW

Manufactured from 0.9mm thick, grade 1.4301 (304) stainless steel with satin finish. This sink has all four sides incorporating a rimmed edge profile, suitable for insetting into a standard sized worktop. The bowl is prepared for a 38mm waste. Supplied complete with fixing clips.

Tap holes: 2 at 180mm centres With overflow Bowl dimensions: 420 x 350 x 180mm Dimensions: 1015 x 505 x 200mm

B20085L	Left hand drainer
Mandatory a	ccessories:
F2119	38mm waste, plug, chain and overflow
Complimenta	ry accessories:
F1081N	13mm crosshead pillar taps
F1083N	13mm fluted handle pillar taps
F1026N	13mm deck pattern mixer tap






# SISSONS STAINLESS STEEL SINGLE BOWL, SINGLE DRAINER INSET SINK WITHOUT OVERFLOW

Manufactured from 0.9mm thick, grade 1.4301 (304) stainless steel with satin finish. This sink has all four sides incorporating a rimmed edge profile, suitable for insetting into a standard sized worktop. The bowl is prepared for a 38mm waste. Supplied complete with fixing clips.

Tap holes: 2 at 180mm centres Without overflow Bowl dimensions: 420 x 350 x 180mm Dimensions: 1015 x 505 x 200mm

B20085LT	Left hand drainer
Mandatory	accessories:
F2068	38mm CP brass flush grated waste
Compliment	ary accessories:
F1081N	13mm crosshead pillar taps
F1083N	13mm fluted handle pillar taps
F1026N	13mm deck pattern mixer tap






# RODAN SINGLE BOWL, SINGLE DRAINER INSET SINK WITH TAP HOLES

Manufactured from 0.9mm thick, grade 1.4301 (304) stainless steel with satin finish. Supplied with fixing clips, sound deadening pad and earth tag located on the clip rail. Supplied with 38mm waste, without overflow.

Drainer: Left/Right hand drainer available Tap holes: 2 at 200mm centres Bowl dimensions: 420 x 345 x 180mm Dimensions: 940 x 485 x 180mm

F0359P	Right hand drain
F0360P	Left hand draine






# SISSONS STAINLESS STEEL SINGLE BOWL, SINGLE DRAINER INSET SINK WITH OVERFLOW

Manufactured from 0.9mm thick, grade 1.4301 (304) stainless steel with satin finish. This sink has all four sides incorporating a rimmed edge profile, suitable for insetting into a standard sized worktop. The bowl is prepared for a 38mm waste. Supplied complete with fixing clips.

Tap holes: 2 at 180mm centres With overflow Bowl dimensions: 420 x 350 x 180mm Dimensions: 1015 x 505 x 200mm

B20085R	Right hand drainer
Mandatory	accessories:
F2119	38mm waste, plug, chain and overflow
Compliment	tary accessories:
F1081N	13mm crosshead pillar taps
F1083N	13mm fluted handle pillar taps
F1026N	13mm deck pattern mixer tap






# SISSONS STAINLESS STEEL SINGLE BOWL, SINGLE DRAINER INSET SINK WITHOUT OVERFLOW

Manufactured from 0.9mm thick, grade 1.4301 (304) stainless steel with satin finish. This sink has all four sides incorporating a rimmed edge profile, suitable for insetting into a standard sized worktop. The bowl is prepared for a 38mm waste. Supplied complete with fixing clips.

Tap holes: 2 at 180mm centres Without overflow Bowl dimensions: 420 x 350 x 180mm Dimensions: 1015 x 505 x 200mm

B20085RT	Right hand drainer
Mandatory o	accessories:
F2068	38mm CP brass flush grated waste
Compliment	ary accessories:
F1081N	13mm crosshead pillar taps
F1083N	13mm fluted handle pillar taps
F1026N	13mm deck pattern mixer tap





# SISSONS STAINLESS STEEL SINGLE BOWL, SINGLE DRAINER INSET SINK WITH TAP HOLES

Manufactured from 0.9mm thick, grade 1.4301 (304) stainless steel with satin finish. This sink has all four sides incorporating a rimmed edge profile, suitable for insetting into a standard sized worktop. The bowl is prepared for a 38mm waste. Supplied complete with fixing clips.


Drainer: Left hand single drainer Tap holes: 2 at 200mm centres Without overflow Bowl dimensions: 420 x 350 x 180mm Dimensions: 1015 x 505 x 200mm

B20085LT2	Left hand drainer
B20085RT2	Right hand drainer
F2068	38mm CP brass flush grated waste
Complimenta	ry accessories:
F1074N	13mm lever taps
F1075N	13mm mixer taps


Utility sinks Utility sinks

# HBN compliant sinks







# G22048L/R



G22049L/R



G22052N



# SISSONS SIT ON SINKS WITH RADIUSED FRONT EDGE

A range of sinks manufactured from 1.2mm thick, grade 1.4301 (304) stainless steel, satin polish finish. Each sink profile incorporates a radiused front edge together with a radiused internal corner at the base of the upstand. All sink bowls are prepared for a 38mm waste outlet which can be supplied as an extra.

All the sink units are suitable for mounting onto cabinets, front leg supports or cantilevered brackets - see recommended listed below.

External Dimensions: 1000 x 650 x 220mm

G22048L	Single bowl, left hand drainer, no tap holes
G22048R	Single bowl, right hand drainer, no tap holes
G22048LT	Single bowl, left hand drainer, with 2 tapholes at 200mm centres
G22048RT	Single bowl, right hand drainer, with 2 tapholes at 200mm
centres	

External Dimensions: 1200 x 650 x 220mm

G22049L	Single bowl, left hand drainer, no tap holes
G22049R	Single bowl, right hand drainer, no tap holes
G22049LT	Single bowl, left hand drainer, with 2 tapholes at 200mm centres
G22049RT	Single bowl, right hand drainer, with 2 tapholes at 200mm
centres	

External Dimensions: 1800 x 650 x 220mm

G22052N	Single bowl, double drainer, no tapholes
G22053N	Double bowl, double drainer, no tapholes
G22052NT	Single bowl, double drainer, with 2 tapholes at 200mm centres
G22053NT	Double bowl, double drainer, with 2 tapholes at 200mm centres
Mandatory for	all

38mm CP brass flush grated waste outlet

Complimentary front leg supports and brackets

G26523L	Stainless steel cantilever bracket left and
G26523R	Stainless steel cantilever bracket right
G26524L	Stainless steel front leg support left and
G26524R	Stainless steel front leg support right

Complimentary for all units with 2 tapholes

F1074N	13mm high necked lever operated taps
F1075N	13mm mixer lever tap
Compliment	tary for all units with no tanholos


Complimentary for all units with no tapholes	
F4LT1024	F4LT-MED thermastatic single lever mixer
AT02-022	Aquarius 250mm with copper tails

Manufactured in accordance with the Health Building Notes (HBN 00-10, Part C) standards



# HBN compliant sinks





### SISSONS SK1 WALL MOUNTED SINGLE BOWL SINK


Manufactured from 1.2mm thick, grade 1.4301 (304) stainless steel with satin polish finish. The sink top is turned down on all four edges and incorporates a wet area recess. The bowl is prepared for a 38mm waste outlet and the sink top can either be mounted on wall brackets or front leg supports (sold separately). NOTE: It is not possible to fit an overflow. Manufactured in accordance with HTM 64 / HBN 00-10, Part C Standards.

Without overflow

Bowl dimensions: 500 x 400 x 200mm Dimensions: 600 x 600 x 218mm

G22002N	Without tap holes	
G22002NT	Tap holes: 2 at 200mm centres	
Mandatory a	iccessories:	
F2068	38mm flush grated waste	
G26523L/R	Stainless steel cantilever bracket left/right	
OR		
G26524L/R	Stainless steel front leg support left/right	
Complimentary accessories:		
F1074N	3mm high neck lever taps	






### SISSONS SK2 WALL MOUNTED DOUBLE BOWL SINK

Manufactured from 1.2mm thick, grade 1.4301 (304) stainless steel with satin polish finish. The sink top is turned down on all four edges and incorporates a wet area recess. The bowls are prepared for a 38mm waste outlet and the sink top can either be mounted on wall brackets or front leg supports (sold separately). Manufactured to HTM 64 / HBN 00-10, Part C Standards.

Without tap holes and without overflow Bowl dimensions: 500 x 400 x 200mm Dimensions: 1200 x 600 x 218mm

G22004N	Double bowl sink
Mandatory a	ccessories:
F2068	38mm flush grated waste
G26523L/R	Stainless steel cantilever bracket left/right
OR	
G26524L/R	Stainless steel front leg support left/right






# SISSONS STA SINGLE BOWL, SINGLE DRAINER SIT ON SINK

Manufactured from 1.2mm thick, grade 1.4301 (304) stainless steel with satin polish finish. This sink top is turned down on all four edges and incorporates a wet area recess. The bowl is prepared for a 38mm waste outlet and the sink top can either be mounted on wall brackets or front leg supports (sold separately). Manufactured to HTM 64 / HBN 00-10, Part C Standards.

Without tap holes and without overflow Bowl dimensions: 500 x 400 x 200mm Dimensions: 1200 x 600 x 218mm

G22006L	With left hand drainer		
G22006R	With right hand drainer		
Mandatory a	Mandatory accessories:		
F2068	38mm flush grated waste		
G26523L/R	Stainless steel cantilever bracket left/right		
OR			
G26524L/R	Stainless steel front leg support left/right		
•••••			






### SISSONS STB SINGLE BOWL, DOUBLE DRAINER SIT ON SINK

Manufactured from 1.2mm thick, grade 1.4301 (304) stainless steel with satin polish finish. The sink top is turned down on all four edges and incorporates a wet area recess. The bowl is prepared for a 38mm waste outlet and the sink top can either be mounted on wall brackets or front leg supports (sold separately). Designed without tap holes, therefore any taps to be fitted must be mounted onto the wall. Manufactured to HTM 64 / HBN 00-10, Part C Standards.

Without tap holes and without overflow Bowl dimensions: 500 x 400 x 200mm Dimensions: 1800 x 600 x 218mm

G22008D	Single bowl sink
Mandatory a	ccessories:
F2068	38mm flush grated waste
G26523L/R	Stainless steel cantilever bracket left/right
OR	
G26524L/R	Stainless steel front leg support left/right




# SISSONS STC DOUBLE BOWL, SINGLE DRAINER SIT ON SINK

Manufactured from 1.2mm thick, grade 1.4301 (304) stainless steel with satin polish finish. The sink top is turned down on all four edges and incorporates a wet area recess. The bowls are prepared for a 38mm waste and requires three brackets or three front leg supports (sold separately). NOTE: It is not possible to fit an overflow. Designed without tap holes, therefore any taps to be fitted must be mounted onto the wall. Manufactured to HTM 64 / HBN 00-10, Part C Standards.

Without tap holes and without overflow Bowl dimensions: 500 x 400 x 200mm Dimensions: 1800 x 600 x 218mm

G22010L G22010R	With left hand drainer With right hand drainer	
Mandatory accessories:		
F2068	38mm flush grated waste	
G26523L/R	Stainless steel cantilever bracket left/right	
OR		
G26524L/R	Stainless steel front leg support left/right	
F2068 G26523L/R OR	38mm flush grated waste Stainless steel cantilever bracket left/right	








Manufactured from 1.2mm thick, grade 1.4301 (304) stainless steel with satin polish finish. The sink top is turned down on all four edges and incorporates a wet area recess. The bowl is prepared for a 38mm waste outlet and the sink top can either be mounted on wall brackets or front leg supports (sold separately). Manufactured to HTM 64/ HBN 00-10, Part C Standards.

Drainer: Left/Right hand drainer available Without tap holes and without overflow Bowl dimensions: 400 x 400 x 180mm Dimensions: 1000 x 600 x 220mm

G22045L	With left hand drainer
G22045R	With right hand drainer
Mandatory a	ıccessories:
F2068	38mm flush grated waste
G26523L/R	Stainless steel cantilever bracket left/right
OR	
G26524L/R	Stainless steel front leg support left/right





# WALL HUNG CLINICAL BASIN 500 MM

Clinical wall hung basin, manufactured from Vitreous china with an alpine white finish. Designed without tap holes and overflow. Back outlet for increased infection prevention.

HBN & HTM Compliant Dimensions: 500 x 215 x 390 mm SW00-042 Clinical basin


5000-042	Cillical basin
Mandatory ac	cessories:
SW00-044	1 1/4" Plastic bottle trap
SW00-043	Hangers and waste adaptor
•	

HBN compliant sinks HBN compliant sinks



# Urinals






### MARDEN CERAMIC URINAL

Concealed trap single urinal, manufactured from high quality vitreous china to BS 340. For use with a back inlet spreader and concealed cistern feed. HBN / HTM compliant urinal bowl.

Dimensions: 310 x 560 x 300mm

SW00-036	Ceramic urinal
Mandatory a	iccessories:
SW00-037	Urinal spreader
SW00-039	Domed urinal waste
SW00-040	P trap
SW00-041	Plastic elbow
Complimento	ary accessories:
	Ceramic urinal divider





# CHARTHAM EXPOSED TRAP URINAL BOWL


Exposed trap urinal, manufactured from high quality vitreous china to BS 340. Designed to be installed with either a back inlet spreader for concealed cistern feed or top inlet spreader for exposed cistern feed. Sleek easy to clean design with exposed bottle trap, can be mounted at lower height.

Dimensions: 355 x 445 x 330mm

SW00-080	Exposed urinal	
Mandatory a		
SW00-081	Hanging brackets	
SW00-082	Plastic resealing bottle trap	
SW00-039	Domed waste	
SW00-083	Top Inlet urinal spreader	
OR		
	Back inlet urinal spreader	
Complimentary accessories:		
SW00-038	Ceramic urinal divider	








# LANGLEY CONCEALED TRAP URINAL BOWL


Concealed trap urinal bowl, manufactured from high quality vitreous china to BS 340. Sleek easy to clean design with concealed bottle trap.

HBN / HTM compliant urinal bowl Dimensions: 375 x 645 x 350mm

SW00-084	Concealed urinal
Mandatory a	iccessories:
SW00-085	Back inlet spreader
SW00-086	Urinal fixings
SW00-039	Domed urinal waste
SW00-040	P trap
SW00-041	Plastic elbow
Complimento	ary accessories:
SW00-038	Ceramic urinal divider








### **CENTINEL URINAL TROUGHS - CONCEALED SPARGE**


Centinel wall mounted urinals with concealed sparge pipe. Manufactured from 1.2mm thick grade 1.4301 (304) stainless steel with a satin polish finish. Designed with the waste outlet positioned centrally within the urinal. Supplied complete with a 50mm waste, concealed sparge pipes, sparge pipe cover, interconnecting pipework, plastic cistern, downpipe and trap cover. The recommended height for fixing the cisterns is 750 - 950mm, from the underside of the cistern to the top return of the urinal. All urinals are screw fixed to the wall through fixing holes in the top flange together with separate wall mounted brackets which support the base of the unit.

Dimensions: 555 x 300mm

CEN120C	1200mm wide urinal
CEN150C	1500mm wide urinal
CEN180C	1800mm wide urinal
CEN240C	2400mm wide urinal
Compliment	ary accessories:
UC01-017	Flushmatic urinal control wall mounted - mains
OR	
UC01-024	Flushmatic urinal control ceiling mounted - mains








# CENTINEL URINAL TROUGHS - EXPOSED SPARGE

Centinel wall mounted urinals with exposed sparge pipe. Manufactured from 1.2mm thick grade 1.4301 (304) stainless steel with a satin polish finish. Designed with the waste outlet positioned centrally within the urinal. Supplied complete with a 50mm waste, exposed sparge pipes, sparge pipe cover, interconnecting pipework, plastic cistern and downpipe. The recommended height for fixing the cisterns is 750 - 950mm, from the underside of the cistern to the top return of the urinal. All urinals are screw fixed to the wall through fixing holes in the top flange together with separate wall mounted brackets which support the base of the unit.

Dimensions: 555 x 300mm

CEN120E	1200mm wide urinal
CEN150E	1500mm wide urinal
CEN180E	1800mm wide urinal
CEN240E	2400mm wide urinal
Compliment	ary accessories:
UC01-017	Flushmatic urinal control wall mounted - mains
OR	
UC01-024	Flushmatic urinal control ceiling mounted - mains





# CAMPUS URINAL POD

CAMPUS wall-mounted urinal made of 304 chromium-nickel steel, satin finished surface, bowl material thickness 1.2mm, shroud 0.9mm, oval bowl shape, stainless steel spreader with G 1/2 connecting hose, punched strainer waste, including DN 40 siphon, mounting strip and mounting material.

Dimensions 313 x 627 x 342mm

CMPX539	Stainless steel urinal
Complimento	ıry accessories;
CMPX560	Stainless steel Urinal divider
CMPX136	Urinal installation frame

6 Uringls

# Control up to 20 urinals with one F5 smart urinal sensor

# F5 SMART urinal sensors

Public toilet facilities with high footfall pose major challenges for planners and operators in terms of hygiene and cleanliness. Absolute reliability of the products used has the highest priority, especially for urinal systems.

The F5 Smart Urinal Sensor is ideally suited to these requirements and is now not only available for ceramic urinals, but also for single and row urinals made of stainless steel. With the help of central room monitoring, the sensor mounted on the ceiling ensures that urinals are flushed automatically after each use. The sensor registers the users presence in the room solely on the basis of physical parameters, i.e. without a camera function.







The "Smart Urinal" app is available for commissioning and controlling the Smart Urinal Sensor, it also enables other functions to be programmed.

# Intelligent, central control

With the F5 Smart Urinal Flushing System, you only need a single central ceiling sensor to control up to 20 urinals. Our advanced technology ensures optimal flushing performance whilst simplifying your setup.


The system involves a central room monitoring setup where sensors are mounted on the ceiling. These sensors communicate wirelessly with Smart Urinal Units installed behind the urinals, triggering automatic flushing after each use. The F5 Smart Urinal Sensor is designed for both single and row urinals, and can be installed in urinals made of stainless steel or ceramic materials.



Intelligent urinal controls

# Intelligent urinal controls






# F5 SMART URINAL UNIT FOR GREY WATER FED SINGLE URINAL - BOWL MOUNTED

F5 smart urinal unit for installation behind a single urinal made of CMPX539 stainless steel. Water path pre-assembled with hose for water connection, locking and solenoid valve. Control unit in sealed plastic box for wireless communication with the F5 smart urinal sensor. Either for battery operation with 6 V lithium battery (CR-P2) per control unit or separate power supply via power supply unit 6.75 V/12 V DC.

Battery compartment including battery or power supply unit with extension cable must be ordered separately.

ACEF3003	F5 Smart urinal bowl mount -	grey water
Mandatory a	ccessories:	-
ACEX9010	Extension cable 5m	-
F5EF3009 (b	lack) OR F5EF3008 (white)	F5 Smart urinal sensor
ACEX9023 (k	oattery) OR ACEX9001 (mains)	Power supply






# F5 SMART URINAL UNIT FOR SINGLE BOWL - DUCT MOUNTED

F5 smart urinal unit for installation within the water inlet area of the CAMPUS urinal series. Water path pre-assembled with pipe elbows for DN 15 water connection and flushing pipe, valve assembly with water volume regulation including a strainer, solenoid valve and hose. Control unit in sealed plastic box for wireless communication with the F5 smart urinal sensor. Either for battery operation with 6 V lithium battery (CR-P2) per control unit or separate power supply via power supply unit 6.75 V/12 V DC.

Battery compartment including battery or power supply unit with extension cable must be ordered separately.

	Air break	
ACEX9010	Extension cable 5m	
F5EF3009 (b	lack) OR F5EF3008 (white)	F5 Smart urinal sensor
ACEX9023 (b	pattery) OR ACEX9001 (mains)	Power supply





# KINGSWEAR PROGRAMMABLE URINAL SENSORS

Wall mounted programmable urinal sensor, manufactured from 316 stainless steel with a brushed finish also available as gold and black. The sensor is AIR (active infrared) and completely touch-free to promote excellent hygiene. The sensor can be fully programmed with adjustable settings including sensor range, flush times, hygiene purges and more. Dimensions: 50 x 50 x 3mm

purges and n	nore. Dimensions, 50 x 50 x 5mm
AC02-023	Programmable urinal sensor - Satin
AT10-036	Programmable urinal sensor - Black
AT10-038	Programmable urinal sensor - Gold
Mandatory (	accessories:
AT00-221	Single station kit
UC00-001	Air break
AC01-001	Handheld programmer (one per site)
Compliment	ary accessories:
AT00-222	Two station kit
	Three station kit







Dimensions: 160 x 154 x 38mm

Connection voltage 110–240 V AC, 50/60 Hz

Area covered 5 x 2.5 m at ceiling height 3 m

hours after last activation and saving of statistical data. Commissioning and flushing programme selection and

F5 SMART URINAL SENSOR BLACK

	·· ··· ··· · · · · · · · ·
F5EF3009	F5 Smart urinal sensor black
Mandatory o	iccessories:
ACEF3004	F5 Smart urinal duct mount (see page 98)
OR	
ACEF3003 98)	F5 Smart urinal bowl mount - grey water (see page

parametrisation for each smart urinal unit via the necessary app, installed on Bluetooth®-enabled mobile devices from Android 7 or







# F5 SMART URINAL SENSOR WHITE

F5 smart urinal sensor ceiling mounted for central flushing of urinal systems in a room. Multiple simultaneous user detection and touchfree triggering of flushing programmes for connected F5 smart urinal units via wireless communication. Option to connect up to 20 F5 smart urinal units. The area covered by the sensors is dependent on the ceiling height. Hygiene flushing 24 hours after last activation and saving of statistical data. Commissioning and flushing programme selection and parametrisation for each smart urinal unit via the necessary app, installed on Bluetooth®-enabled mobile devices from Android 7 or iOS 11.

Dimensions:  $160 \times 154 \times 38$ mm Connection voltage 110-240 V AC, 50/60 HzArea covered  $5 \times 2.5 \text{ m}$  at ceiling height 3 m

F5EF3008	F5 Smart urinal sensor white
Mandatory a	iccessories:
ACEF3004	F5 Smart urinal duct mount (see page 98)
OR	
<b>ACEF3003</b> 98)	F5 Smart urinal bowl mount - grey water (see page







# AQUARI-SAVE URINAL CONTROL VALVE

The Aquari-Save is a programmable urinal control valve which grants the user full control over the release of water. This aids in water saving by reducing unnecessary water release outside standard facility use through extensive programmable options. The programmer will set the water usages at equal time distances of time within the pre-set first and last flush time, for example, if you set 6 flushes in 6 hours, it will flush once per hour. The valve is supplied with pre-set flushing times that can be altered via programmer.

Supplied with handheld programmer. Dimensions: 51 x 85 x 34mm

UC99-034	Aquari-save urinal control unit with programmer
Complimento	ıry accessory:
AC04-046	Aquari-save additional unit without programmer

Intelligent urinal controls

# Urinal flushing



### **URINAL CONTROL SYSTEM - SINGLE STATION**

Urinal control system single station kit supplied with one standard sensor with ø50mm bezel. The sensor activates a flush when the user walks away.

The single station kit includes:

- 1 x Mains control box
- 1 x Solenoid valve
- 1 x Sensor with 50mm bezel

**UC07-010** Urinal control system - single station

Mandatory accessories:

UC00-001 Air-break valve



### **URINAL CONTROL SYSTEM - TWO STATION**

Urinal control system two station kit supplied with two standard sensors that are supplied with  $\emptyset 50 \text{mm}$  bezel. The sensor activates a flush when the user walks away.

The two station kit includes:


- 1 x Mains control box
- 2 x Solenoid valves
- 2 x Sensors with 50mm bezels

UC07-011 Urinal control system - two station

Mandatory accessories:

UC00-001 Air-break valve





### FLUSHMATIC DOWNLIGHTER KIT - MULTIPLE BOWLS

Flushmatic urinal control for use with multiple station urinals, manufactured from ABS. The downlightler kit is designed to be ceiling mounted. The control is activated by the passive infrared (PIR) detector which detects movement within the sensing area, switching the unit into a timing mode. After a pre-set time, the solenoid valve opens allowing water to flow into the cistern activating the flushing cycle.


Dimensions: 128 x 128 x 86mm Requires KWC DVS cistern.

F3049

UC01-018 Flushmatic downlighter kit - battery UC01-024 Flushmatic downlighter kit - mains Mandatory accessories: F3048 Concealed cistern for Flushmatic 9L

Concealed cistern for Flushmatic 13.5L






# FLUSHMATIC PEARL SOLO - SINGLE BOWL

The ceiling mounted Pearl Solo Flushmatic urinal control is used for single station urinals. This works by using a passive infrared (PIR) detector which detects movement within the sensing area, switching the unit into a timing mode. After a pre-set time, the solenoid valve opens allowing water to flow into the cistern activating the flushing cycle. The flush time can be customised by the user turning the rotary switch on the Flushmatic board.

UC01-027 Flushmatic pearl solo - mains Mandatory accessories: UC00-001 Air-break valve





# FLUSHMATIC URINAL CONTROL - MAINS


Flushmatic urinal control, manufactured from ABS plastic (control box). Designed for use with multiple station urinals and to be surface mounted. The control uses a passive infrared (PIR) detector which detects movement within the sensing area, switching the unit into a timing mode. After a pre-set time, the solenoid valve opens allowing water to flow into the cistern activating the flushing

fill-time for the cistern can be customised by the user using the appropriate switches on the Flushmatic board.

Supplied with mains power supply 240 V AC Dimensions: 120 x 100 x 45

UC01-017	Flushmatic urinal control - mains
Mandatory ac	cessories:
F3048	Concealed cistern for Flushmatic 9L
OR	
F3049	Concealed cistern for Flushmatic 13.5L





# FLUSHMATIC URINAL CONTROL - BATTERY

Flushmatic urinal control, manufactured from ABS plastic (control box). Designed for use with multiple station urinals and to be surface mounted. The control uses a passive infrared (PIR) detector which detects movement within the sensing area, switching the unit into a timing mode. After a pre-set time, the solenoid valve opens allowing water to flow into the cistern activating the flushing

fill-time for the cistern can be customised by the user using the appropriate switches on the Flushmatic board.

Supplied with battery kit 6V DC Dimensions: 120 x 100 x 45

UC01-005	Flushmatic urinal control - battery
Mandatory a	ccessories:
F3048	Concealed cistern for Flushmatic 9L
OR	•
F3049	Concealed cistern for Flushmatic 13.5L

Urinal flushing Urinal flushing



# WCs




### LANGLEY BACK TO WALL RIMLESS CERAMIC WC PAN

Rimless back to wall wc pan, manufactured from high quality vitreous china to BS 340. With minimalistic design allowing for easy cleaning and maintenance. Rimless flushing for unrivalled hygiene and an effective silent flush using less water. Compatible with concealed cistern, tested with flush volume as low as 4/2.6ltr dual flush for water saving

Standard height and projection pan Seat not included Dimensions: 360 x 400 x 550mm

SW00-076	Ceramic WC
Mandatory a	ccessories:
WC02-011	1 1/2" Cistern kit
SW00-077	Soft close toilet seat & cover
OR	
SW00-078	Slim soft close toilet seat & cover






## CHARTHAM CERAMIC WC

Rimless back to wall WC pan, manufactured from high quality vitreous china to BS 340. Sits at a comfort height of 450mm from floor to top of seat. Desgned with a sleek easy to clean style and rimless flush to prevent bacteria from building. The rimless technology also offers an effective silent flush using less water

Seat is not included (see options below) Dimensions: 360 x 425 x 520mm

SW00-028	Ceramic WC
Mandatory a	ccessories:
WC02-011	1 1/2" Cistern kit
SW00-033	White seat and soft close cover
OR	
SW00-034	White seat only
OR	
SW00-035	Blue seat only





# CAMPUS FLOOR STANDING WC PAN WITH SEAT AND LID


Floor standing WC pan with shroud to the floor, stainless steel, surfacesatin finished, material thickness 1,5mm, flushing certificated to EN 997, concealed flushing rim with min. 4 litre flushing capacity, with a shrouded 100mm diameter horizontal 'P' trap outlet, pressed seat area tapered towards centre, all edges curved, fixing with included mounting plate conform to EN 33, including safety screws. 4 litre flush EN997 approved.

Dimensions: 360 x 456 x 500mm

CMPX597BN	With black seat and lid
CMPX597WN	With white seat and lid
CMPX597GN	With grey seat and lid
AQFX0006	Installation frame and cistern







### LANGLEY WALL HUNG RIMLESS TOILET PAN

Wall hung rimless WC pan, manufactured from high quality vitreous china to BS 340. With an innovative rimless hygienic design, making the pan easier to clean, whilst conserving water. Wall hung installation reduces dirt traps. Compatible with concealed cistern, tested with flush volume as low as 4/2.6ltr dual flush for water saving.


Complies to BS EN 997:2018 Seat not included

Dimensions: 360 x 320 x 520mm

SW00-079	Rimless WC pan
Mandatory o	iccessories:
AQFX0006	Installation frame and cistern
SW00-077	Soft close toilet seat & cover
OR	
SW00-078	Slim soft close toilet seat & cover







# CHARTHAM WALL HUNG CERAMIC WC

Wall hung WC pan. Manufactured from high quality vitreous china to BS 3402. With an innovative rimless hygienic design, making the pan easier to clean, whilst conserving water. Wall hung installation reduces dirt traps. Compatible with concealed cistern,

Dimensions: 370 x 400 x 520mm

SW00-026	Wall hung WC
Mandatory a	ccessories:
AQFX0006	Installation frame and cistern
SW00-033	White seat and soft close cover
OR	
SW00-034	White seat only
OR	•
SW00-035	Blue seat only





# CAMPUS WALL HUNG WC PAN WITH SEAT AND LID

Wall hung WC pan, stainless steel, surface satin finished, material thickness 1,5mm, flushing certificated to EN 997, concealed flushing rim with min. 4 liter flushing capacity, with a shrouded 100mm diameter horizontal 'P' trap outlet, pressed seat area tapered towards centre, all edges curved, fixing with mounting plate supplied, conform to EN 33, includes security screws. 4 litre flush EN997 approved.

Dimensions 360 x 409 x 500mm

Options:	
CMPX592BN	With black seat and lid
CMPX592WN	With white seat and lid
CMPX592GN	With grey seat and lid
Mandatory ac	cessories:
AQFX0006	Installation frame and cistern



106 WCs 1

# WC flushing





### CONCEALED PLASTIC CISTERN KIT - VERTICAL


Concealed vertical cistern kit, manufactured from ABS. Designed to be wall mounted. Complete with WRAS approved side entry valve. KWC DVS vertical cisterns are designed to improve flush velocity when compared to traditionally shaped cisterns, with the added benefit of providing more service space either side of the cistern for a more professional installation. Kit includes:

- 1 x WRAS approved side entry valve
- 1 x flush pipe
- 1 x back to pan connector
- 1 x concealed vertical cistern

Cistern Dimensions: 221 x 499 x 159mm (W x H D)

WC02-013 1 1/2" Cistern kit **WC02-014** 2" Cistern kit





### CONCEALED PLASTIC CISTERN KIT


Concealed cistern kit, manufactured from ABS. Designed to be wall mounted. Complete with WRAS approved side entry valve. Kit

- 1 x WRAS approved side entry valve
- 1 x flush pipe
- 1 x back to pan connector
- 1 x concealed cistern
- 1 x blanking plug

Cistern Dimensions: 495 x 330 x 150mm (W x H D)

WC02-011 1 1/2" Cistern kit WC02-012 2" Cistern kit





# COMPACT CONCEALED PLASTIC CISTERN KIT

Black compact cistern kit, manufactured from ABS. Designed to be wall mounted. Complete with WRAS approved side entry valve. Kit

- 1 x WRAS approved side entry valve
- 1 x flush pipe
- 1 x back to pan connector
- 1 x concealed cistern

Cistern Dimensions: 410 x 295 x 135mm (W x H D)

WC02-017 1 1/2" Cistern kit

# WC FLUSHVALVE SPARES


WC01-023	Flushvalve with in-built overflow (valve only) - 2"
WC01-032	Manual Overide Flushvalve with in-built overflow
(valve only) - 1	1/2" base
WC01-033	Manual Overide Flushvalve with in-built overflow
(valve only) - 2	" base
WC01-012	Flushvalve with in-built overflow (base only) - 1 1/2'

WC01-022 Flushvalve with in-built overflow (valve only) - 1 1/2"


WC01-013 Flushvalve with in-built overflow (base only) - 2"

WC01-002	Replacement body
WC00-001	Replacement stainless steel piston & spring
WC00-003	Replacement spring only - suitable for all models
WC00-002	Replacement piston & spring for manual override
WC00-010	Control box (PCB) C/W 1.5m cable
WC00-008	Control box (V3 Battery) C/W 1.5m cable
WC00-012	Control box (Low Voltage Mains) C/W 1.5m cable
WC00-155	Enclosure, Intelligent charger & battery pack
WC00-129	Flush Flow Restrictor - 2" Flush pipe









### WC FLUSHVALVE KIT - WAVE-ON

Touch-free WC flushing system with an electronically operated drop valve that replaces the traditional syphon and delivers a WRAS approved 4 litre single flush from the cistern to the lavatory

Kit includes:

- 1 x Flushvalve
- 1 x Wave on sensor
- 1 x Control box


WC03-002	With 1 1/2" base - mains
WC03-003	With 2" base - mains
WC03-050	With 1 1/2" base - battery
WC03-051	With 2" base - battery


### PROGRAMMABLE SENSOR WC FLUSH VALVE KIT

Programmable sensor WC flush valve kit. Designed with WRAS approved 4 litre single flush and programmable sensor. Fits to new and existing WC cisterns.

WC03-013	With 1 1/2" base - mains
WC03-014	With 2" base - mains
WC03-017	Mains - for use with AQFX frame
WC03-052	With 1 1/2" base - battery
WC03-053	With 2" base - battery
WC03-019	Battery - for use with AQFX frame







The WC flushing system is an electronically operated drop valve which replaces the traditional syphon and delivers a WRAS approved 4L single flush from the cistern to the lavatory bowl.


Kit includes:


1 x Flushvalve

1 x Tactile switch 1 x Control box

WC03-028	With 1 1/2" base - mains
WC03-029	With 2" base - mains
WC03-063	With 1 1/2" base - battery












Kit includes:

- 1 x Flushvalve
- 1 x Tactile wave on sensor
- 1 x Control box

VC03-022	With 1 1/2" base - mains
VC02-023	With 2" base - mains







# PROGRAMMABLE DIRECT FLUSHING KIT

Direct flushing kit for environments where the traditional fitting of  $\boldsymbol{\alpha}$ cistern is not desired, or not possible. The cistern in this setup is replaced with a direct flushing, mains fed solenoid valve, including an air break to prevent backflow. Kit consists of:

1x Programmable WC Sensor 1x M8 (Y splitter)

1 x M8 3m Cable Extension 1x Air Break

1x 6v DC ASCO Valve

1 x M8 (Y splitter)


1 x Air break

WC03-043 Programmable direct flushing kit

WC flushing WC flushing

# WC frame flushing system






### AQUAFIX INSTALLATION FRAME FOR WC PAN

AQUAFIX installation element for wall-mounted toilet bowl, with wall-installation cistern. Self-supporting, powder coated steel-frame construction, TÜV tested, for individual mounting for dry-wall lining. Concealed toilet cistern with water condensation insulation, with dual-volume flushing (7,5-4,5 l or 4-2 l) or Start/Stop flushing, triggering function transferred via flexible pressure spirals, charge valve noise group I, mounting bracket 4-fold adjustable for toilet-connecting elbow DN 90 / DN 100, complete with flexible connecting hose, toilet-connecting elbow, retaining bolts for toilet, building protection and fastening material.

Dimensions:  $450 \times 1120 \text{mm}$  (W x H) Requires WC03-017 flush valve kit or manual flush plate to operate

AQFX0006 Installation frame






### AQUAFIX FLUSHING PLATE - PROGRAMMBLE SENSOR

Flushing plate for AQUAFIX wall-installation cistern, operation from front. Compatible with the AQUAFIX installation frames and the programmable flush valve kits listed below. Includes fixing bolts and securing screw, made of stainless steel.

Dimensions: 207 x 148 x 14mm

2000105718	AQUAFIX flushing plate - programmable sensor
Mandatory accessories:	
WC03-017	Mains - for use with AQFX frame
OR	
WC03-019	Battery - for use with AQFX frame






### AQUAFIX INSTALLATION FRAME FOR WC PAN BARRIER FREE

AQUAFIX installation frame for barrier-free wall-mounted toilet bowl, with wall-installation cistern. Self-supporting, powder coated steel-frame construction, TÜV tested, forindividual mounting for dry-wall lining. Concealed toilet cistern with watercondensation insulation, with dual-volume flushing (7,5-4,5 l or 4-2 l) or Start/Stop flushing, triggering function transferred via flexible pressure spirals, charge valve noise group I, mounting bracket 4-fold adjustable for toilet- connecting elbow DN 90 / DN 100, complete with flexible connecting hose, toilet-connecting elbow, retaining bolts fortoilet, building protection and fastening material.

Dimensions 450 x 1120 mm (Wx H)

AQFX0007 Installation frame, barrier-free






# AQUAFIX FLUSHING PLATE - DUAL FLUSH

Flushing plate for AQUAFIX wall-installation cistern, operation from front, 2-level flushing or start/stop flushing, consisting of operating button, button mounting, installation frame, fixing bolts and securing screw, made of stainless steel.

Dimensions: 207 x 148 x 22mm

**AQUA555** AQUAFIX flushing plate - dual flush






# AQUAFIX INSULATED CONCEALED CISTERN KIT

AQUAFIX Concealed cistern with front access, height: 820 mm, insulated against condensation, with dual flush (6I/3I), button function transmitted to AQUAFIX flush valve via flexible cables, connection to push plate via turn-click connection, flush pipe bend with protection cap, AQUAFIX fill valve Noise Class I, angle valve R 1/2, protection box for access opening can be cut to size, with fixing brackets, without fastenings, packed in a box concealed cistern tested to DIN EN 14055, Noise Class I

FLSY0003 Aquafix cistern kit 1 1/2"





# AQUAFIX FLUSHING PLATE - SINGLE FLUSH


Flushing plate for AQUAFIX wall-installation cistern, operation from front, consisting of operating button, button mounting, installation frame, fixing bolts and securing screw, made of stainless steel.


Dimensions: 207 x 148 x 22mm

**AQUA557** AQUAFIX flushing plate - single flush

110 Cisterns

# NEW The Kingswear WC flushing






### KINGSWEAR PUSH PLATE WHITE

Kingswear Push plate white for Aquafix frames & cisterns with small access opening, dual flush, consisting of actuator element incl. chromed decorative frame, cover plate and fixing bolts, packed in a box

Material: plastic/white

AQUA562	Kingswear push plate
Mandatory o	iccessories:
AQFX0006	Installation frame
OR	
AQFX0007	Installation frame, barrier-free
OR	
FLSY0003	Aquafix cistern kit 1 1/2"






# KINGSWEAR PUSH PLATE CHROME

Kingswear Push plate chrome for Aquafix frames & cisterns with small access opening, dual flush, consisting of actuator element incl. chromed decorative frame, cover plate and fixing bolts, packed in a box

Material: plastic/chrome

AQUA563	Kingswear push plate
Mandatory a	iccessories:
AQFX0006	Installation frame
OR	
AQFX0007	Installation frame, barrier-free
OR	
FLSY0003	Aquafix cistern kit 1 1/2"






# KINGSWEAR PUSH PLATE SATIN

Kingswear Push plate satin for Aquafix frames & cisterns with small access opening, dual flush, consisting of actuator element incl. chromed decorative frame, cover plate and fixing bolts, packed in a box

Material: plastic/satin

AQUA564	Kingswear push plate
Mandatory o	accessories:
AQFX0006	Installation frame
OR	
AQFX0007	Installation frame, barrier-free
OR	
FLSY0003	Aquafix cistern kit 1 1/2"
	•





# KINGSWEAR PUSH PLATE MATT BLACK

Kingswear Push plate matt black for Aquafix frames & cisterns with small access opening, dual flush, consisting of actuator element incl. chromed decorative frame, cover plate and fixing bolts, packed in a box

Material: plastic/matt black

AQUA565	Kingswear push plate
Mandatory o	iccessories:
AQFX0006	Installation frame
OR	
AQFX0007	Installation frame, barrier-free
OR	
FLSY0003	Aquafix cistern kit 1 1/2"



# Stainless style

# Kingswear programmable WC flushing kits



# KINGSWEAR PROGRAMMABLE WC FLUSHVALVE KIT - BLACK

Programmable sensor WC flush valve kit. Designed with WRAS approved 4 litre single flush and programmable sensor. Fits to new and existing WC cisterns.

AT10-039 Programmable Flush WC Sensor - Black



# KINGSWEAR PROGRAMMABLE WC FLUSHVALVE KIT - GOLD

Programmable sensor WC flush valve kit. Designed with WRAS approved 4 litre single flush and programmable sensor. Fits to new and existing WC cisterns.

AT10-041 Programmable Flush WC Sensor - Gold



# KINGSWEAR PROGRAMMABLE WC FLUSHVALVE KIT - SATIN

Programmable sensor WC flush valve kit. Designed with WRAS approved 4 litre single flush and programmable sensor. Fits to new and existing WC cisterns.

AC02-023 Programmable Flush WC Sensor - Satin

# PROGRAMMABLE

Options include adjustable run-on times, sensor range, hygiene purges and more.

# COMPATIBLE

Programmable sensors are compatible with all DVS electronic taps, showers, WCs and urinals ranges.

# COLOURFUL

The sensors have been designed to match the range of colourful taps. Available in gold, satin and black with a brushed finish. The traditional stainless colour is also available.

# **EFFICIENT**

Real time data captured from the intelligent sensors can be uploaded using the DVS branded hand held programmer via the USB port. Allowing accurate monitoring of water efficiency.


# HYGIENIC

The sensors promote excellent hygiene in any washroom environment and are completely touch-free. A simple hand wave motion will activate the sensor.



# F5 Shower towers






### **F5E THERM STAINLESS STEEL SHOWER PANEL**

F5S Therm shower panel manufactured from stainless steel with self-closing thermostatic mixer. Designed with integrated self-closing cartridge, thermostat and pre-assembled hygiene unit including sensor with control electronics to perform automatic water hygiene flushing, program-controlled thermal disinfection (additional bypass solenoid-operated flush valve cartridge required) and storage of statistical data. Activated water hygiene flushing at fixed intervals of 24 hours. Option to set parameters with the bidirectional remote control. Optional hygiene unit for battery operation with 6 V lithium battery per fitting or separate power supply via plug-in power supply unit 6.75 V/12 V DC. Shower head and battery compartment including battery or plug-in power supply unit with extension cable to be ordered separately.

Complete with 9.0 l/min comfort shower head Dimensions: of housing 235 x 1160 x 100mm

### 3600002408






## F5S-MIX STAINLESS STEEL SHOWER PANEL - MAINS

F5S Mix shower panel manufactured from stainless steel for wall mounting with DN 15 self-closing single control mixer. FRAMIC self-closing mixing cartridge, hydraulically controlled, low maintenance and stagnation free, with ceramic disc technology, self-closing, flow pressure independent due to the medium-independent design. Stepless adjustment of flow duration. With adjustable, turn-proof temperature stop. Housing made of stainless steel with raised function surface and plastic cover caps. Connecting hoses with lockable water volume control with backflow preventer and strainer.

Complete with 9.0 l/min comfort shower head Dimensions: 1160 x 235 x 90mm

# 3600002410






# F5E SHOWER PANEL WITH HAND SHOWER FITTING

F5E Therm shower panel made of stainless steel for wall mounting with thermostatic mixer and a hand shower fitting. Electrically controlled, for connection to hot water and cold water. Shower valve with integrated solenoid valve cartridge, thermostat and mechanism for optional bypass solenoid valve cartridge to perform program-controlled thermal disinfection. Thermostat with metal handle, an adjustable and turn-proof temperature stop and an option for manual thermal disinfection. Button sensor including control electronics with start/stop function and deactivation for cleaning. Activated water hygiene flushing 24 hours after last activation and saving of statistical data. With option for parameterization and communication via the optional bidirectional remote control. Battery operation with 6 V lithium battery (CR-P2) per fitting, separate power supply via plug-in power supply unit 6.75 V / 12 V DC or AQUA3000 open system accessories.

Dimensions: of housing  $235 \times 1160 \times 90$ mm Battery compartment including battery or plug-in power supply unit with extension cable to be ordered separately.

# SH99-101






### **F5E-THERM MIRANIT SHOWER PANEL - MAINS**

F5E Therm shower panel manufactured from Miranit for wall mounting with thermostatic mixer. Electrically controlled, for connection to hot water and cold water. thermostat and mechanism for optional bypass solenoid valve cartridge to perform program-controlled thermal disinfection. Button sensor including control electronics with start/stop function and deactivation for cleaning. Connecting hoses with lockable water volume control with backflow preventer and strainer. Activated water hygiene flushing 24 hours after last activation and saving of statistical data. Programmable options available via the optional bidirectional remote control.

Complete with 9.0 l/min comfort shower head Integrated solenoid valve
Battery operation: 6 V lithium battery
Power supply unit with extension cable to be ordered separately.
Dimensions: 1160 x 235 x 100mm

### 3600002409






### F5S MIX MIRANIT SHOWER PANEL

F5S Mix shower panel made of mineral material for wall mounting with DN 15 self-closing single control mixer. FRAMIC self-closing mixing cartridge, hydraulically controlled, low maintenance and stagnation free, with ceramic disc technology, self-closing, flow pressure independent due to the medium-independent design. Stepless adjustment of flow duration. With adjustable, turn-proof temperature stop. For connection to hot water and cold water. All-metal construction, visible parts high-polished or chrome-plated. Housing with raised function surface made of MIRANIT resinbonded mineral material with pore-free smooth surface (temperature-resistant up to 80 °C), Alpine white colour. Connecting hoses with lockable water volume control with backflow preventer and strainer.

Complete with 9.0 l/min comfort shower head Dimensions:  $235 \times 1160 \times 100$ mm

# 3600002411





# F5S THERM MIRANIT SHOWER PANEL


Shower panel manufactured from Miranit with a self-closing thermostatic mixer. Designed with integrated self-closing cartridge, thermostat and pre-assembled hygiene unit. Includes connecting hoses with lockable water volume control and backflow preventer and strainer. Activated water hygiene flushing at fixed intervals of 24 hours. Option to set parameters using the optional bidirectional remote control. Optional hygiene unit for battery operation with 6 V lithium battery per fitting or separate power supply via plug-in power supply unit 6.75 V/12 V DC. Shower head and battery compartment including battery or plug-in power supply unit with extension cable to be ordered separately.

Complete with 9.0 l/min comfort shower head Dimensions: of housing  $235 \times 1160 \times 100$ mm

### SH99-100

118 Showers

# Showers




### F3S-MIX SELF-CLOSING - PIPE

F3S-Mix self-closing wall-mounted shower mixer DN 15. Self-closing mixing cartridge, hydraulically controlled, piston-free design, self-closing, stepless configuration of flow duration. With adjustable temperature stop. Connects to hot and cold water. G 3/4 B for installation of bent outlet or surface-mounted shower pipe, high-polished chromium-plated brass. With adjustable connections, with backflow preventer, strainers and screw rosettes.

F3SM2001	Mixer for pipe connection
Mandatory a	iccessories:
ACSX2001	Shower pipe
AQUA757	Aquajet - slimline showerhead
OR	
SHAC0008	Aquajet - comfort showerhead






# F3S-MIX SELF-CLOSING - HOSE

F3S-Mix self-closing wall-mounted shower mixer DN 15. Self-closing mixing cartridge, hydraulically controlled, piston-free design, self-closing, stepless configuration of flow duration. With adjustable temperature stop. Connects to hot and cold water. G 3/4 B for installation of bent outlet or surface-mounted shower pipe, high-polished chromium-plated brass. With adjustable connections, with backflow preventer, strainers and screw rosettes.

F3SM2002	Mixer for hose connection
Mandatory accessories:	
ACXX2008	Shower bracket
26.000.111.040	Hand shower head
26.001.003.000	Shower hose






# F4LT-MED THERMOSTATIC SINGLE-LEVER MIXER


F4LT-Med thermostatic lever mixer, thermostat-controlled mixer cartridge with expansion element & active scald protection, fail-safe against backflow as well as adjustable & turn-proof temperature stop, & ceramic disc technology. Optimised for cleaning, scald-protected, safe-touch housing with hand shower connection, G 1/2 B. All-metal construction, polished chromium-plated brass. Decoupled from the tap housing, volume-reduced, smooth water flow from low-lead brass (lead proportion  $\leq$  0.2%), & without nickel coating. With thermal insulation components to reduce heat transfer from the tap housing to the cold-water line. Includes strainers & fully covered by depth-adjustable screw rosettes.

F4LT2003	Shower mixer
Mandatory accessories:	•
ACXX2008	Shower bracket
26.000.111.040	Hand shower head
26.001.003.000	Shower hose

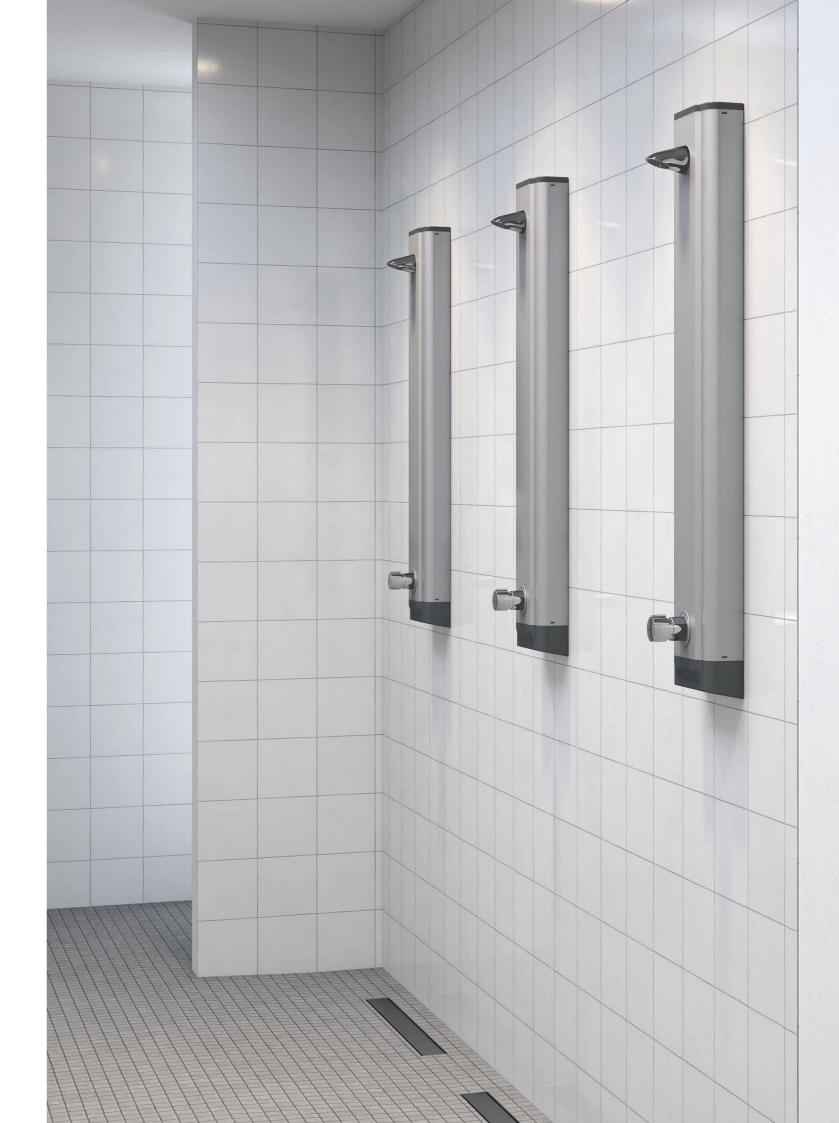

# Showers






### AQUAJET-COMFORT SHOWER HEAD FOR WALL CONNECTION

AQUAJET-Comfort DN 15 shower head with plastic jet face continuously adjustable between 13–23°, anti-limescale system and low aerosol formation. For wall connector with insertable connecting nozzle, diameter 26mm, high-polished chrome-plated brass housing, with i ntegrated flow regulator 9.0 l/min, ready for installation of anti-twist protection.

Also suitable for shower trays,  $800 \times 800 \text{mm}$ 

SHAC0013 Aquajet - comfort showerhead






# AQUAJET-COMFORT SHOWER HEAD BOTTOM INLET

AQUAJET-Comfort shower head DN 15 with infinitely angle-adjustable plastic jet face 13° - 23°, anti-calcification system and low aerosol formation. Model for surface pipe installation 18mm and enclosed flow controllers 6.0 l/min, 9.0 l/min and 12.0 l/min. Housing polished chromium-plated brass. Also suitable for shower trays, 800 x 800mm.

SHAC0008	Aquajet - comfort showerhead
Mandatory a	iccessories:
ACSX2001	Shower pipe
F3SV2001	Self-closing shower





# ANTI-MICROBIAL SHOWERHEAD


Anti-microbial showerhead manufactured from brass with a chrome finished cover. Supplied with removable waterway that is manufactured in four different colours with anti-microbial Biomaster silver ion technology. The ligature resistant heads also feature a one-piece anti-microbial ABS outlet.

Requires sensor and station kit to operate Additional TMV3 required Dimensions: 60 x 90 x 47mm

SH07-095 Anti-microbial showerhead Complimentary accessories:

SH00-070 Replacement Coloured Waterways (Set of 4)

With the State of the State of



### AQUAJET-SLIMLINE SHOWER HEAD FOR WALL CONNECTION


AQUAJET-Slimline shower head DN 15 with plastic jet face with anti-calcification system and low aerosol formation, for wall connecti on, polished chromium-plated brass. With flow controller 9.0 l/min.

AQUA751 Aquajet - slimline showerhead

Mandatory accessories:

ESHHE0002 Flow controller 12.01/Min





# AQUAJET-SLIMLINE SHOWER HEAD BOTTOM INLET


AQUAJET-Slimline shower head DN 15 with plastic jet face with anti-calcification system and low aerosol formation, for surface pipe mounting, polished chromium-plated brass. With flow controllers 9.0 l/min and 12.0 l/min.

Spout projection: 83mm Head Dimensions: 72 x 72 x 83mm

AQUA757 Aquajet - slimline showerhead
Mandatory accessories:
ACSX2001 Shower pipe

F3SV2001 Self-closing shower





## FLUSH MOUNTED CEILING SHOWERHEAD

An Aesthetically pleasing take on Ceiling Height Showerheads whilst maintaining Ligature & Vandal Resistant Design. Ceiling Height High-Security Shower Head with a One-Piece Anti-Microbial ABS outlet. Anti-ligature design, with a tamper-proof security locking screw. Brushed Stainless Steel finish.


Additional TMV3 required Sensor and station kit required

SH07-047 Flush mounted ceiling showerhead

Showers Showers

# Showers






## **F3S SELF-CLOSING BIB TAP**

F3S self-closing bib tap DN 15 for shower facilities. Hydraulically controlled, piston-free design, self-closing, stepless adjustment of flow duration. For connection to pre-mixed hot water or cold water. Housing including changeable valve seat, with outlet on top, G 3/4 B, for installation of surface-mounted shower pipe, high-polished chromium-plated brass. Dimensions: 60 x 60 x 127mm.

F3SV2001	Self-closing bib tap	
Mandatory accessories:		
ACSX2001	Shower pipe	
AC17-047	TMV3	
SHAC0008	Aquajet - comfort showerhead	
OR	-	
AQUA757	Aquajet - slimline showerhead	






# F3S SELF-CLOSING STRAIGHT-WAY VALVE

F3S self-closing straight-way valve DN 15 for in-wall mounting with noise-reducing styrene cladding, for shower facilities. Hydraulically controlled, piston-free design, self-closing, stepless adjustment of flow duration. For connection to pre-mixed hot water or cold water. Changeable valve seat, with internal thread G 1/2, visible parts high-polished, chromium-plated brass. With rosette, depth adjustability 15mm. Dimensions: 80 x 80 x 86mm.

F3SV2003	Self-closing straight way valve
Mandatory o	iccessories:
AC17-047	TMV3
SHAC0013	Aquajet - comfort showerhead
OR	
AQUA751	Aquajet - slimline showerhead






# 12V SHOWER TACTILE AND WAVE-ON SENSORS

Wave-on shower sensor manufactured from stainless steel complete with a 45mm bezel.

Complete with 15 metre cable Separate control box required Thread diameter: 1/2" BSP Dimensions: 45 x 45 x 73mm

SH00-003	Wave-on sensor	
OR		
AC02-050	Red tactile switch (hot) (wall mount)	
Mandatory accessories:		
SH07-001	Shower Control System	





## LIGATURE RESISTANT TEMPERATURE BLENDING VALVE **ADJUSTER**


Temperature blending valve adjuster, manufactured from brass wtih a chrome finish. Designed to be robust with good aesthetics and therefore suits all applications. Manufactured with a robust construction and tamper proof design. Easy to install.

External TMV3 required

Dimensions: 70 x 70mm (W x H)

SH00-011	Wall thickness compatibility 1.5mm - 22mm		
SH00-012	Wall thickness compatibility 22mm - 180mm		
SH00-013	Wall thickness compatibility 180mm - 280mm		
Mandatory accessories:			
AC17-047	TMV3		






# SHOWER BRACKET

Chrome-plated brass shower slider bar with two wall-mounted brackets. Adjustable shower holder with pushbutton operation, made from chrome-plated plastic. Length 900mm, diameter 20mm, including mounting material.

ACXX2008	Shower bracket		
Complimentary accessories:			
26.000.111.040	Hand shower head		
26.001.003.000	Shower hose		






# HAND SHOWER

Hand shower, with TouchProtect, an anti-scald protection thanks to the "double skin" principle. Connecting thread ½". Designed with Easy Grip and colour contrast for the visually impaired.

Flow rate 12 l/min (3 bar)

Dimensions: 22 x 235mm (W x D)

26.000.111.040	Hand shower head		
Complimentary accessories:			
26.001.003.000	Shower hose		
ACXX2008	Shower bracket		




# KINGSWEAR STAINLESS STEEL PROGRAMMABLE SHOWER

Wall Mounted Programmable Sensor is to be used in conjunction with the handheld programmer (AC01-001). The programmer will allow quick and easy adjustment of settings including; run-on time, range, purge and more. Real time data can be uploaded from the programmer via the USB port to allow accurate monitoring of water efficiency.

Station kit required External TMV3 required Dimensions: 50 x 50 x 60mm

AC02-021	Programmable sensor
AT10-033	Programmable sensor - Black
AT10-035	Programmable sensor - Gold
Mandatory a	ccessories:
AT00-221	Station kit
AC17-047	TMV3

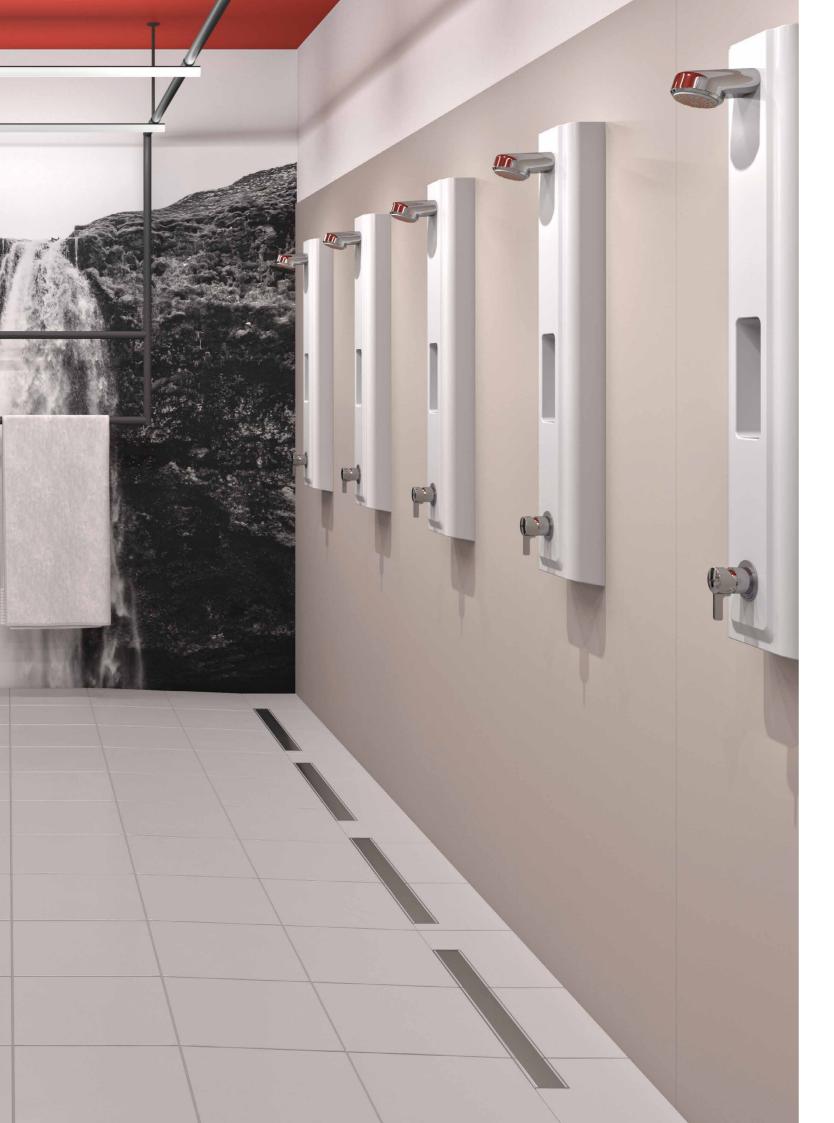

# Versatile Elegance

# Reversible Stainless Steel Linear **Drains**

# Unmatched versatility, odour-free innovation

Introducing a cutting-edge solution that redefines shower drainage the Stainless Steel Linear Drain with a Reversible Cover. This innovative design not only combines sleek aesthetics with seamless functionality but also offers a unique dual-purpose feature. Crafted with precision, this drain can be used as a tile insert, seamlessly integrating into your shower floor's design. Alternatively, it can be reversed to showcase the pristine stainless steel surface, adding a contemporary touch to your bathroom.

Equipped with an advanced odour eliminator, it ensures a consistently fresh and inviting atmosphere in your bathroom. Say goodbye to unpleasant odours that often accompany damp environments. The odour eliminator technology effectively neutralizes unwanted scents, guaranteeing a comfortable and hygienic experience for you and your guests.




### **Linear Shower Drain**

LDOS302 / 2030073039

Dimensions: 300 x 90 x 70 (W x H x D)

\*Available in multiple widths of 600, 700, 800 and 900 mm






Reversible drain usage: Drain Cover is ingeniously designed to offer two distinct styles in one. Choose between the refined sophistication of a seamlessly integrated tile insert or the contemporary resilience of stainless steel, adapting effortlessly to your evolving preferences and interior designs.





Anti-blocking filter plate and odour prevention system with our all in one Linear Shower Drains.

(\*Contact sales person for any relevant customisation queries)

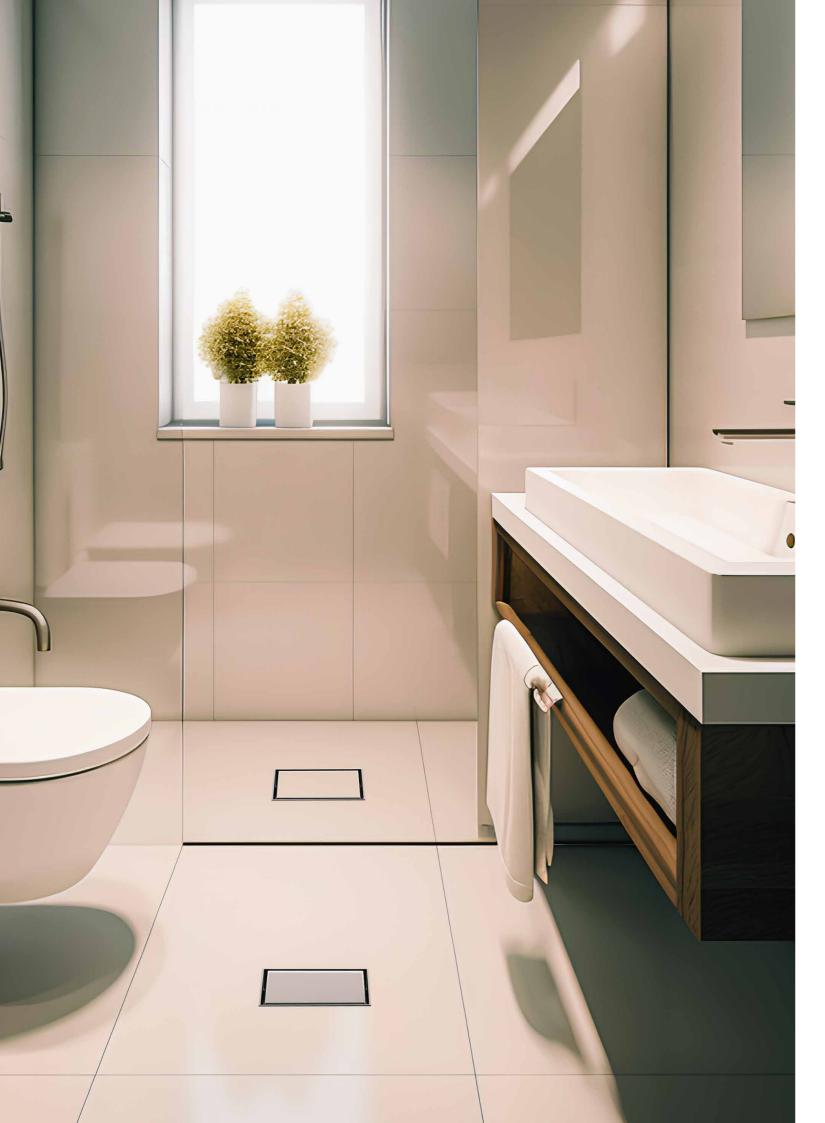


# **Sleek Sophistication**

# Square Drains for Modern Bathrooms

When it comes to transforming your bathroom into a modern oasis, square drains and tile insert drains provide the perfect balance of style and practicality. Square drains offer a contemporary and geometric aesthetic & tile insert drains take bathroom aesthetics to the next level by seamlessly integrating with your choice of tiles. Both square drains and tile insert drains offer functional benefits be-

yond their aesthetic appeal. They prevent water buildup, reduce the risk of slips and falls, and contribute to maintaining a hygienic and comfortable bathroom environment. Additionally, their durable stainless steel construction ensures longevity and resistance to corrosion, making them suitable for daily use and exposure to moisture.





# Square Tile Insert Drain

# SD1304 / 2030067624


•Satin finished tile insert drain, material thickness 2 mm, with 102 mmØ (4") outlet

Dimensions: 130 x 53 x 130 (W x H x D)

\* Available in multiple widths of 150 and 200 mm

# SD1502 / 2030068810

(With 51 mmØ (2") outlet)



# Square Tile Drain with cover

# SD1304C / 2030067628

Dimensions: 130 x 53 x 130 (W x H x D)

\* Available in multiple widths of 150 and 200 mm.



## Square Tile Drain with grated cover SD1304G / 2030071133


• Satin finished square drain with stainless steel grated cover,


material thickness 2 mm, with 102 mmØ (4") outlet Dimensions: 130 x 53 x 130 (W x H x D)

(\*Contact sales person for any relevant customization queries)



# Accessible sanitaryware





### CAMPUS ACCESSIBLE WALL HUNG WC

Wall hung accessible WC, stainless steel, surface satin finished, material thickness 1,5mm, flushing certificated to EN 997, concealed flushing rim with min. 4 litre flushing capacity, with a shrouded 100mm diameter horizontal 'P' trap outlet, pressed seat area tapered towards centre, all edges curved, fixing with included mounting plate conform to EN 33, includes safety screws.

Flush: 4 litre

Dimensions without toilet seat:  $360 \times 351 \times 700$ mm Dimensions with seat and lid:  $360 \times 407 \times 700$ mm

CMPX594	Without toilet seat
CMPX594BN	With black seat and lid
CMPX594GN	With grey seat and lid
CMPX594WN	With white seat and lid
Mandatory ac	cessories:
AOFX0007	Installation frame, barrier-free




# CAMPUS STAINLESS STEEL ACCESSIBLE WC

Floor standing accessible WC pan, manufactured from grade 1.4301 (304) stainless steel with a satin polish finish, supplied complete with multikwik connector. A flush bend and 90° plastic bend are provided for the cistern downpipe connection. Rear mounting plate with 4 no. stainless steel bolts supplied, for mounting onto duct wall. The front of the WC is fixed to the floor using a joggle strip. Pipe fixing is achieved by using the side access panel provided. The WC is supplied with a disabled person's white plastic seat. Rear inlet and top inlet versions available. Cistern required.

Dimensions: 360 x 465 x 637mm

G21748N	Accessible WC 480mm high - rear inlet
G21748NT	Accessible WC 480mm high - top inlet






**CAMPUS BARIATRIC WC** 

The Bariatric toilet is manufactured from grade 1.4301 (304) stainless steel, material thickness 1.5mm - satin polish finish. Complies with BS EN997for 4 litre flushing The specialy designed floor standing toilet is fitted with a seat that is ideal for making use more comfortable. Its large seat area gives increased support and comfort. A width of 50cm gives comfort, security and will give long lasting use in any hospital or medical installation and the increased width makes the toilet seat ideal for a larger person up to 1000kg. With heavy duty seat and lid - Max user weight 381kg. Cistern required.

Dimensions: 600 x 400 x 555mm

G22080N Campus bariatric WC





### CHARTHAM CLOSE COUPLED TOILET PAN WITH CISTERN

Rimless close coupled WC pan with extended projection to 750mm for Doc M compliance. Manufactured from high quality vitreous china to BS 3402. This close coupled toilet comes complete with the WC pan and close coupled 6/3ltr lever action cistern. With rimless design for optimum hygiene & ease of cleaning


4.5ltr effective flush volume

480mm high (including seat) and 750mm projection pan Seat sold separately available in 3 colours (below) Dimensions:

SW00-088	Close coupled wc with cistern
Mandatory a	ccessories:
SW00-034	White toilet seat
SW00-035	Blue toilet seat
SW00-087	Dark grey toilet seat







# CHARTHAM RIMLESS WC HBN COMPLIANT


Rimless back to wall WC pan with 700mm projection. Manufactured from high quality vitreous china to BS 3402. Designed with rimless flush to prevent bacteria from harbouring. Manufactured in accordance with HTM 64 / HBN 00-10, Part C Standards. Cistern required.

Dimensions: 365 x 455 x 700mm

SW00-030	Chartham rimless WC HBN compliant
Mandatory a	ccessories:
SW00-034	White toilet seat
SW00-035	Blue toilet seat
SW00-087	Dark grey toilet seat
-	









Rimless back to wall WC pan with extended projection to 750mm for Doc M compliance. Manufactured from high quality vitreous china to BS 3402. Designed with rimless flush to prevent bacteria from harbouring. Cistern required.

Dimensions: 365 x 455 x 750


SW00-031	Chartham rimless DOC M WC
Mandatory	accessories:
SW00-034	White toilet seat
SW00-035	Blue toilet seat
SW00-087	Dark grey toilet seat

32 Accessible Accessible

# Accessible sanitaryware









# WALL HUNG DOC M WC

Rimless back to wall WC pan with extended projection to 750mm for Doc M compliance. Manufactured from high quality vitreous china to BS 3402. Designed with rimless flush to prevent bacteria from harbouring. Cistern required.


Dimensions: 365 x 455 x 750

SW00-089 Wall hung DOC M WC

Mandatory accessories:

SW00-091 White seat for wall hung WC






### WALL HUNG DOC M CERAMIC BASIN 380MM

San Ceram wall hung basin manufactured from Vitreous china with an alpine white finish. Designed with a right hand or left hand tap hole and is ideal where space is constraint. Complete without overflow and fixings for installation.

Doc M, HBN & HTM Compliant Dimensions: 380 x 175 x 300mm

SW00-047	Basin with right hand tap hole			
SW00-048	Basin with left hand tap hole			
Mandatory o	iccessories:			
SW00-044	1 1/4" Plastic bottle trap			
SW00-049	1 1/4" Strainer waste - unslotted			
OR				
SW00-050	1 1/4" Press top waste - unslotted			










# STAINLESS STEEL ACCESSIBLE WASHBASIN

Stainless steel accessible washbasin for wall mounting. Manufactured from 1.4301 Chrome Nickel steel with a satin finish.

Dimensions 450 x 100 x 350mm Bowl dimensions 400 x 60 x 230mm

ANMX150R	Stainless steel accessible washbasin RH				
ANMX150L	Stainless steel accessible washbasin LH				
Mandatory a	ccessories:				
SW00-044	1 1/4" Plastic bottle trap				
SW00-049	1 1/4" Strainer waste - unslotted				





# VARIUSCARE SINGLE WASHBASIN, BARRIER-FREE

VARIUScare single wash basin made of MIRANIT resin-bonded mineral material. Colour Alpine white with colour strip. Wheelchair accessible, with integrated gripping edge. Seamless moulded bowl, without overflow. With tap hole. Mounting on washbasin back panel. Rear contoured edge. Mounting material included.

Dimensions 450 x 100 x 350mm Bowl dimensions 400 x 60 x 230mm

ANMW505		Alipine White	
ANMW504-E	BLACK	Black strip (RAL 7022)	)
ANMW504-E	BLUE	Blue strip (RAL 5011)	-
ANMW504-F	RED	Red strip (RAL 3020)	-
Mandatory a	iccessorie	s:	-
SW00-044	1 1/4" P	lastic bottle trap	-
SW00-049	1 1/4" S	trainer waste - unslotted	-
OR			-
SW00-050		ress top waste - unslotted	-
			•••••••••••••••••••••••••••••••••••••••



# DOC M packs



# CORNER WC DOC M PACK - BACK TO WALL BLUE

Blue Doc M back to wall pack supplied with: rimless 750mm projection back to wall WC with blue seat, concealed plastic cistern kit, WC Flushvalve kit with programmable sensor, 380mm single washbasin, slotted waste, bottle trap, Aquarius A45 doc M tap, antimicrobial single station mains kit, TMV3 thermostatic mixing valve, and grab rail kit.

Grab rail kit includes:

- 1 x backrest rail 400 x 150mm (RAL 5011)
- 1 x Blue backrest cushion (RAL 5011) 1 x Blue backrest cushion (RAL 5011) 1 x double arm hinged support rail 760 x 250mm (RAL 5011) 4 x straight grab rail 35 x 600mm (RAL 5011)
- 1 x straight grab rail 35 x 450mm (RAL 5011)

DMPX45LHB	Left hand
DMPX45RHB	Right hand



# CORNER WC DOC M PACK - CLOSE COUPLED BLUE

Blue Doc M closed couple pack supplied with: Rimless 750mm projection closed coupled WC with blue seat, 380mm single washbasin, slotted waste, bottle trap, F5L-Therm barrier-free thermostatic single-lever pillar mixer tap, TMV3 thermostatic mixing valve, and grab rail kit.

Grab rail kit includes:

- 1 x double arm hinged support rail 760 x 250mm (RAL 5011) 4 x straight grab rail 35 x 600mm (RAL 5011) 1 x straight grab rail 35 x 450mm (RAL 5011)

DMPXF5LHB	Left hand
DMPYEERHR	Right hand



# CORNER WC DOC M PACK - BACK TO WALL SATIN

Stainless steel Doc M back to wall pack supplied with: G21748N stainless steel floor standing accessible WC pan, cistern, flusvalve kit, Stainless steel barrier-free single washbasin, slotted waste, bottle trap, Aquarius A45 doc M tap, anti-microbial single station mains kit,TMV3 thermostatic mixing valve, and grab rail kit.

Grab rail kit includes:

- 1 x stainless steel backrest rail 400 x 150mm
- 1 x white backrest cushion
- 1 x stainless steel hinge support rail 760 x 250mm
- 4 x stainless steel straight grab rail 35 x 600mm 1 x stainless steel straight grab rail 35 x 450mm

DMPX45LHS Left hand DMPX45RHS Right hand



# DOC M packs with thermal disinfection and sight-line basin technology



### CORNER WC DOC M PACK - BTW WITH TDV

Blue Doc M back to wall pack supplied with: rimless 750mm projection back to wall WC with blue seat, concealed plastic cistern kit, WC Flushvalve kit with programmable sensor, Variuscare barrier-free single washbasin with blue coloured stripe for the visually impaired, slotted waste, bottle trap, Aquarius A45 doc M tap, anti-microbial single station mains kit, thermal disinfection valve, TMV3 thermostatic mixing valve, and grab rail kit.

## Grab rail kit includes:

- 1 x backrest rail 400 x 150mm (RAL 5011)
- 1 x Blue backrest cushion (RAL 5011)
- 1 x double arm hinged support rail 760 x 250mm (RAL 5011)
- 4 x straight grab rail 35 x 600mm (RAL 5011) 1 x straight grab rail 35 x 450mm (RAL 5011)

DMPX45LHBT	Left hand
DMPX45RHBT	Right hand



## CORNER WC DOC M PACK - CLOSE COUPLED WITH TDV

Blue Doc M closed couple pack supplied with: Rimless 750mm projection close coupled WC with blue seat, Variuscare barrier-free single washbasin with blue coloured stripe for the visually impaired, slotted waste, bottle trap, F5L-Therm barrier-free thermostatic single-lever pillar mixer tap, hygiene unit for F5L tap, battery compartment, TMV3 thermostatic mixing valve, and grab rail kit.

- 1 x double arm hinged support rail 760 x 250mm (RAL 5011)
- 4 x straight grab rail 35 x 600mm (RAL 5011)
- 1 x straight grab rail 35 x 450mm (RAL 5011)

DMPXF5LHBT	Left hand
DMPXF5RHBT	Riaht hand

 ${f NEW}$  Hygiene unit allows thermal purge override of the manual tap



# CORNER WC DOC M PACK - BTW WITH TDV

Stainless steel Doc M back to wall pack supplied with: G21748N stainless steel floor standing accessible WC pan, cistern, flusvalve kit, Variuscare barrier-free single washbasin with black coloured stripe for the visually impaired, slotted waste, bottle trap, Aquarius A45 doc M tap, anti-microbial single station mains kit, thermal disinfection valve, TMV3 thermostatic mixing valve, and grab rail kit.

## Grab rail kit includes:

- 1 x stainless steel backrest rail 400 x 150mm
- 1 x white backrest cushion
- $1\,\mathrm{x}$  stainless steel hinge support rail  $760\,\mathrm{x}$   $250\,\mathrm{mm}$
- 4 x stainless steel straight grab rail 35 x 600mm
- 1 x stainless steel straight grab rail 35 x 450mm

DMPX45LHST	Left hand
DMPX45RHST	Right hand



# Accessible shower DOC M packs



### DOC M SHOWER PACK CHROME

Stainless steel Doc M shower pack. Pack includes grab rail set, manufactured from stainless steel with 35mm diameter rails. Full doc M pack includes: Vita shower head, shower rail and hose, TMV3 thermostatic mixing valve and grab rail kit.

Grab rail kit includes:

- 1 x stainless steel backrest rail 400 x 150mm
- 1 x white backrest cushion
- 2 x stainless steel hinge support rail 760 x 250mm
- 2 x stainless steel straight grab rail 35 x 600mm
- 1 x stainless steel shower seat with white lid 650 x 400mm

# DMPXVT20S



## DEMENTIA CARE DOC M SHOWER PACK WITH LIGATURE **RESISTANT GRAB RAILS**

Doc M shower pack in red supplied with: Vita pro lever mixer shower, shower rail and hose, thermal disinfection valve, TMV3 thermostatic mixing valve and grab rail kit.

Grab rail kit includes:

- 1 x ligature-resistant backrest rail 400 x 150mm (RAL 3020)
- 1 x ligature-resistant white backrest cushion
- 2 x ligature-resistant hinge support rail 760 x 250mm (RAL 3020) 2 x ligature-resistant straight grab rail 35 x 600mm (RAL 3020)
- 1 x shower seat 650mm (RAL 3020)

# DMPXVT20R



# HIGH SECURITY LIGATURE RESISTANT DOC M SHOWER PACK

Doc M ligature resistant shower pack in blue supplied with: high security dual outlet shower, thermal disinfection valve, TMV3 thermostatic mixing valve and grab rail kit.

- 1 x ligature-resistant backrest rail 400 x 150mm (RAL 5011)
- 1 x ligature-resistant white backrest cushion
- 2 x ligature-resistant hinge support rail 760 x 250mm (RAL 5011) 2 x ligature-resistant straight grab rail 35 x 600mm (RAL 5011) 1 x shower seat 650mm (RAL 5011)

## DMPXVR13B



# Grab rail packs for back to wall WC



# BLUE BACK TO WALL GRAB RAIL PACK

# GRBX801

Grab rail kit includes:

GRBX141B	1 x straight grab rail 35 x 450mm
GRBX161B	4 x straight grab rail 35 x 600mm
GRBX271B	1 x double arm hinged support rail 760 x 250mm
GRBX312B	1 x Blue backrest cushion
GRBX321B	1 x backrest rail 400 x 150mm




# BLACK BACK TO WALL GRAB RAIL PACK

Grab rail kit includes:

GRBX141BLK	1 x straight grab rail 35 x 450mm
GRBX161BLK	4 x straight grab rail 35 x 600mm

GRBX271BLK 1 x double arm hinged support rail 760 x 250mm
GRBX312W 1 x backrest cushion
GRBX321BLK 1 x backrest rail 400 x 150mm



# WHITE BACK TO WALL GRAB RAIL PACK

# GRBX805

Grab rall kit in	cludes:
GRBX141W	1 x straight grab rail 35 x 450mm
GRBX161W	4 x straight grab rail 35 x 600mm
GRBX271W	1 x double arm hinged support rail 760 x 250mm
GRBX312W	1 x backrest cushion
GRBX321W	1 x backrest rail 400 x 150mm



# SATIN BACK TO WALL GRAB RAIL PACK

Grab rail kit includes:

GRBX141	1 x straight grab rail 35 x 450mm
GRBX161	4 x straight grab rail 35 x 600mm
GRBX271	1 x double arm hinged support rail 760 x 250mm
GRBX312W	1 x backrest cushion
GRBX321	1 x backrest rail 400 x 150mm



# Grab rail packs for close coupled WC



BLUE GRAB RAIL PACK

# GRBX802

Grab rail kit includes:

GRBX141B 1 x straight grab rail 35 x 450mm
GRBX161B 4 x straight grab rail 35 x 600mm
GRBX271B 1 x hinged support rail 760 x 250mm



WHITE GRAB RAIL PACK

# GRBX806

GRBX141W 1 x straight grab rail 35 x 450mm
GRBX161W 4 x straight grab rail 35 x 600mm
GRBX271W 1 x hinged support rail 760 x 250mm



**BLACK GRAB RAIL PACK** 

GI	RR	XX	₹1	1	

GRBX271BLK

Grab rail kit includes: GRBX141BLK 1 x straight grab rail 35 x 450mm 4 x straight grab rail 35 x 600mm GRBX161BLK

1 x hinged support rail 760 x 250mm



SATIN GRAB RAIL PACK

# GRBX813

GRBX271


Grab rail kit includes: GRBX141 1 x straight grab rail 35 x 450mm 4 x straight grab rail 35 x 600mm GRBX161

1 x hinged support rail 760 x 250mm



# Accessible water controls






# AQUARIUS A45 DOC M TAP SPOUT

Aquarius deck mounted A45 Doc M tap manfactured in 316 stainless steel with a brushed finish. Sensor operated for maximum hygiene and efficiency. 5 litres per minute integrated flow control. (other flow rates available). Designed with automatic purge function, sensor range adjustment, wave on/wave off function, anti vandal and lock out functions and a chlorination function. TMV3 required.

Spout projection: 97mm

AT03-021	With PEX hose (15mm)	
AT03-022	With copper tails (10mm)	
Mandatory o	accessories;	
AT00-221	Single station antimicrobial mains kit	
AC17-047	TMV3	
Complimentary accessories;		
SD01-012	A45 soap dispenser	






# PROGRAMMABLE SENSOR WC FLUSH VALVE KIT

Programmable sensor WC flush valve kit. Designed with WRAS approved 4 litre single flush and programmable sensor. Fits to new and existing WC cisterns.

WC03-013	With 1 1/2" base - mains
WC03-014	With 2" base - mains
WC03-017	Mains - for use with AQFX frame
WC03-052	With 1 1/2" base - battery
WC03-053	With 2" base - battery
WC03-019	Battery - for use with AQFX frame





# F4LT-MED THERMOSTATIC SINGLE-LEVER SHOWER MIXER


F4LT-Med thermostatic lever mixer, thermostat-controlled mixer cartridge with expansion element & active scald protection, fail-safe against backflow as well as adjustable & turn-proof temperature stop, & ceramic disc technology. Optimised for cleaning, scald-protected, safe-touch housing with hand shower connection, G 1/2 B. All-metal construction, polished chromium-plated brass. Decoupled from the tap housing, volume-reduced, smooth water flow from low-lead brass (lead proportion ≤ 0.2%), & without nickel coating. With thermal insulation components to reduce heat transfer from the tap housing to the cold-water line. Includes strainers & fully covered by depth-adjustable screw rosettes.

F4LT2003	Shower mixer
Mandatory accessories:	-
ACXX2008	Shower bracket
26.000.111.040	Hand shower head
26.001.003.000	Shower hose
	-



# Accessible water controls






## VITA PRO 2.0 LEVER MIXER - BATH

Lever mixer tap, ensures precise water flow control. Intrinsically safe against backflow, its fixed spout incorporates Neoperl® Perlator® laminar tech for consistent water stream. The KWC cartridge with safety device M 35 OP, ceramic discs, and adjustable flow rate/ temperature guarantee longevity and comfort. Easy installation with included  $1/2" \times 3/4"$  wall connections and shut-off valve L 40. Upgrade to a diverter that prioritizes safety, durability, and user experience.

20.522.333.000

Vita pro 2.0 lever mixer - bath






## VITA PRO 2.0 LEVER BASIN MIXER TAP

Discover unparalleled ease with our Diverter's intelligent design. The ergonomic polyamide lever ensures a secure grip, while the adjustable offset option enhances personalization. Embrace water efficiency with EcoProtect technology. Enjoy a fixed spout featuring Neoperl® Perlator® laminar flow. The KWC cartridge M 35 OP, with ceramic discs, offers variable flow/temperature, including a limit setting. Reinforced stopper ensures controlled output. Flexible 3/8" connection hoses, QuickInstallation via threaded connection, and ø35mm mounting hole simplify setup. Elevate your experience with a diverter that blends convenience and innovation seamlessly.

12.528.051.000FL

Vita pro 2.0 lever basin mixer tap






## VITA PRO 2.0 LEVER MIXER SHOWER

Iconic from every angle. A shower to meet the highest design standards. Timeless elegance in exceptional architecture. Operation designed for a secure grip, as well as safe and easy handling. Ergonomic and robust operating lever, made of polyamide to adjust the handling even betterto suit personal requirements, the offset lever can be installed so that it is twisted into the cap (standard: see illustration). Intrinsically safe against backflow. KWC cartridge M 35 OP with ceramic discs flow rate and temperature continuously variable temperature limitation. Reinforced stopperfor output volume and temperature (standard setting). Wall connections 1/2" x 3/4", without shut-off valve eccentric 10mm

21.522.330.000

Vita pro 2.0 lever mixer shower






## VITA PRO 2.0 KITCHEN LEVER MIXER

Experience effortless and secure control with our Diverter's userfocused design. The ergonomic, robust polyamide operating lever ensures a comfortable grip, while the unique offset installation option caters to individual preferences. Enjoy a 150° swivel spout, Neoperl® Perlator® laminar flow, and ample OptimalSpace for all tasks. The KWC cartridge M 35 S, with ceramic discs, provides durability and adjustable flow/temperature, including temperature limitation. The diverter offers flexibility with 3/8" connection hoses, QuickInstallation via threaded connection, and ø35mm mounting hole. With a flow rate of 12 l/min (3 bar) and acoustic group I certification, it's the pinnacle of efficient, safe functionality.

10.521.023.000LLFL

Vita pro 2.0 kitchen lever mixer






# VITA PRO 2.0 LEVER MIXER SHOWER

Experience unparalleled control with our Diverter, meticulously crafted for secure and effortless operation. Its ergonomic polyamide lever ensures a reliable grip, and the offset option adapts to individual preferences. Choose top or below outflow placements. The KWC cartridge M 35 H, featuring ceramic discs, allows continuous flow and temperature adjustments. Included in the package are the function unit, lever, cap, sleeve, cover plate, and holder for the escutcheon. Fasten the cover plate without screws for a streamlined look. For concealed installation, consider the separately available KWC BLUEBOX® unit. Enhance your space with a diverter that combines functionality and convenience seamlessly.

21.524.500.000	Vita pro 2.0 lever mixer shower
39.999.900.931	Blue box without shut-off valve
39.999.910.931	Blue box with shut-off valve






# F5L-THERM THERMOSTATIC SINGLE-LEVER PILLAR MIXER


Single-lever mixer with thermal disinfection capability. DN 15 pillar mixer for accessible sanitary facilities, lever length 150mm. Designed with Easy grip and colour contrast for the visually impaired. Thermostatically-controlled mixer cartridge with expansion element and active scald protection as well as adjustable and turn-proof temperature stop, and ceramic disc technology. With mechanism for optional hygiene unit for automatic hygiene flushing and program-controlled thermal disinfection and storage of statistical data. Lever cap in ergonomic bracket design, with slight curvature in the front and basalt-grey coating, in line with two-senses principle (tactile and visual). For connection to hot water and cold water via pipes, includes strainers.

F5LT1011	F5L Tap
Complimenta	ry accessories:
ACLX1001	Hygiene unit for on-wall installation
ACLX1005	Hygiene unit for in-wall installation
SD01-003	Pillar soap dispenser (chrome)

Accessible water controls

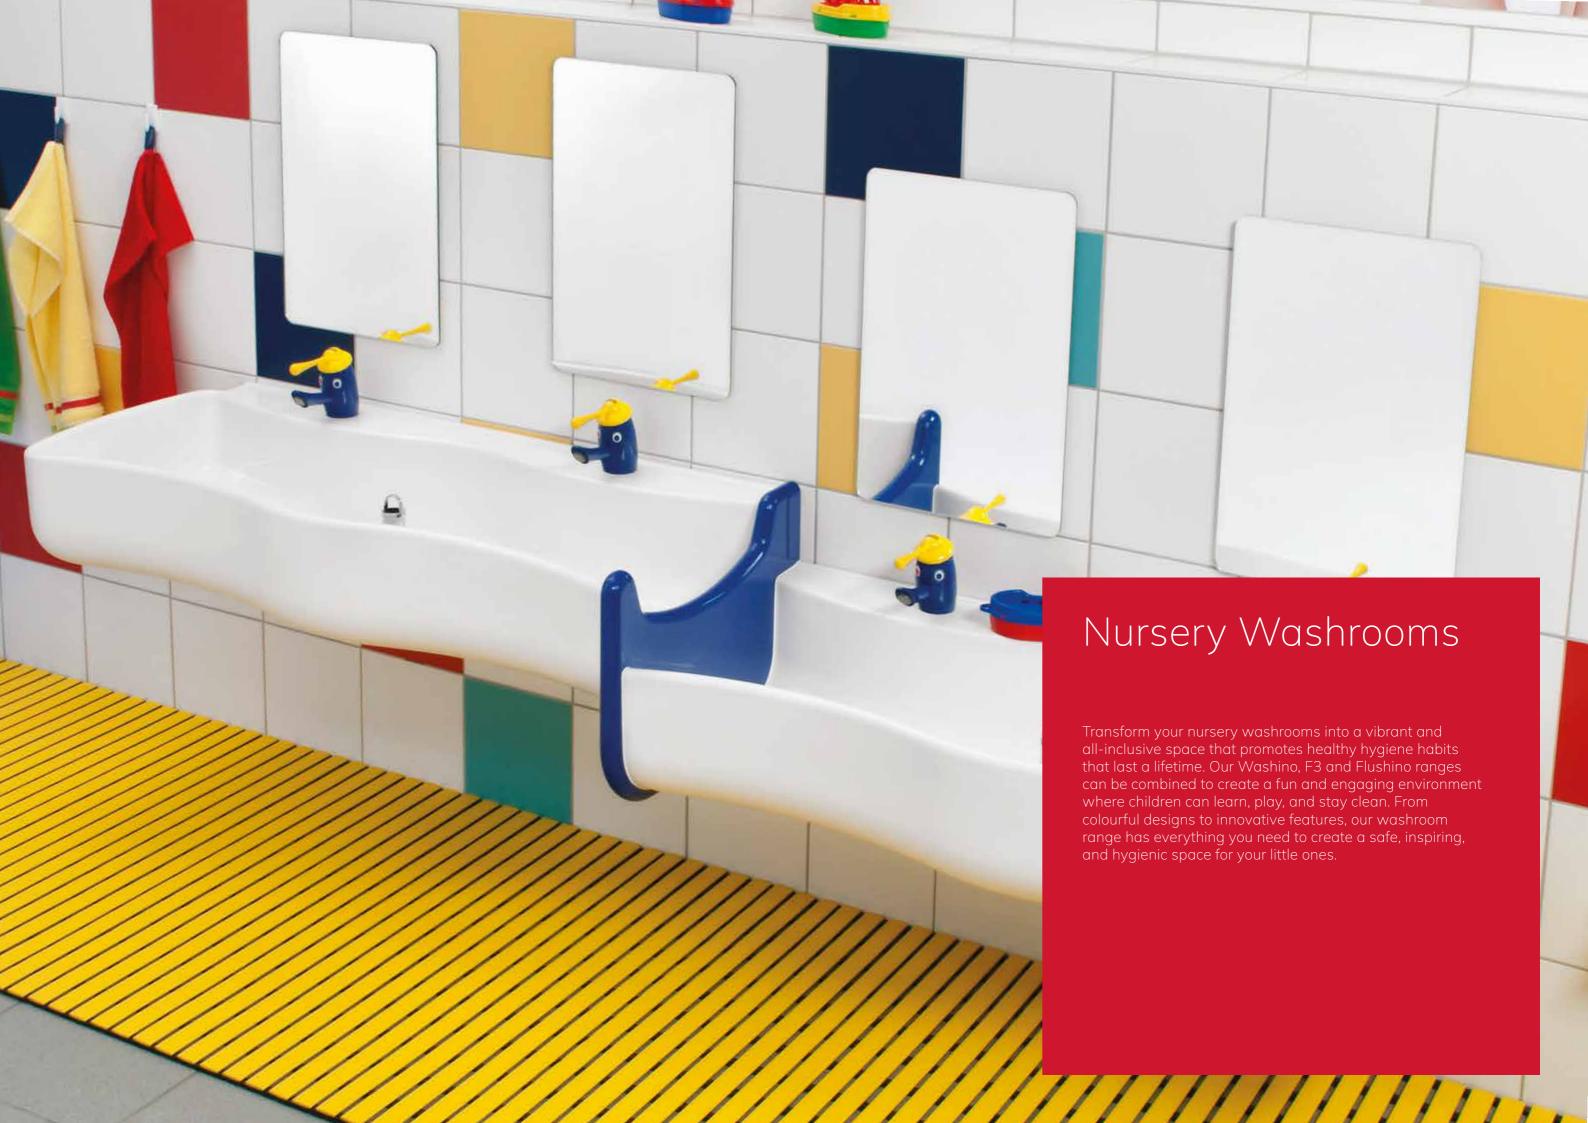

# Colourful & Inclusive Washrooms




## WASHINO 2/3 CHILDREN'S WASH AND PLAY TROUGH

WASHINO children's wash-and-play trough made of MIRANIT resin-bonded mineral material, Alpine white colour. With options for 2 or 3 wash places. Wave-shaped basin, large inner and outer radii of basins, with integrated surge edge, tap landing with a tap hole for each wash place. Mounting on washbasin back panel. Mounting material included.

Complete with stand pipe overflow waste

SANW200P	2 tap holes	1100 x 450 x 207mm
SANW215P	3 tap holes	1600 x 450 x 207mm
Complimenta	ry accessories:	
MT00-050	AQUAPINO nursery to	ар
F3SV1101	F3 Self closing tap for	r pre-mixed
F3SV1004	F3 self closing tap for	pre-mixed anti-block




# WASHINO 4 CHILDREN'S WASH AND PLAY TROUGH

WASHINO-4 children's wash-and-play trough made of MIRANIT resin-bonded mineral material, Alpine white colour. With 4 wash places. Wave-shaped basins, large inner and outer radii of basins, with integrated surge edge, tap landing with a tap hole for each wash place. Integrated divider with overflow function made of MIRANIT, blue colour (RAL 5002). Waste and overflow valve as a standpipe for 2 wash places each. Each basin with one waste outlet (distance between the outlets 1000mm). Mounting on washbasin back panel. Mounting material included.

Dimensions 2100 x 240 x 470mm

SANW205P	Wash and play trough
Complimento	ıry accessories:
MT00-050	AQUAPINO nursery tap
F3SV1101	F3 Self closing tap for pre-mixed
F3SV1004	F3 self closing tap for pre-mixed anti-block



# WASHINO-STEP CHILDREN'S WASH AND PLAY TROUGH

WASHINO-Step children's wash-and-play trough made of MIRANIT resin-bonded mineral material, Alpine white colour. Model with basin ri ght top/left bottom. With 4 wash places (2 wash places with a height difference of 100mm). Wave-shaped basins, large inner and outer radii of basins, with integrated surge edge, tap landing with a tap hole for each wash place. Integrated divider with overflow function made of MIRANIT, blue colour (RAL 5002). Waste and overflow valve as a standpipe for 2 wash places each. Each basin with one waste outlet (distance between the outlets 1000mm). Mounting on washbasin back panel. Mounting material included.

Dimensions 2100 x 340 x 470mm

SANW212P	Split level right high, left low
SANW211P	Split level left high, right low
Complimenta	ry accessories:
MT00-050	AQUAPINO nursery tap
F3SV1101	F3 Self closing tap for pre-mixed
F3SV1004	F3 self closing tap for pre-mixed anti-block

# NEW Aquapino Nursery Tap






# AQUAPINO NURSERY TAP FOR PRE-MIXED SUPPLY

Introducing the Aquapino Pillar mixer tap that has been specially designed to cater to the handwashing needs of nurseries. This tap comes equipped with an advanced Eco-stop cartridge that enables water conservation, making it an eco-friendly choice. The tap has a flow limiter of 6 I/min for an optimal flow rate. Additionally, the tap has been coated with a non-toxic material that ensures the safety of the children using it. The Aquapino Pillar mixer tap is the perfect choice for any nursery setting.

MT00-050	AQUAPINO nursery tap
Mandatory a	ccessories:
AC17-047	TMV3

# Flushino Nursery WCs






# FLUSHINO BACK TO WALL WC

Our Flushino Back to Wall toilet pan is the ideal height for young children at 350mm, to encourage and support hygienic, independent use. Manfactured from high quality vitreous china to BS 3402. When paired with Washino & Aquapino, the Flushino completes your ultimate nursery washroom solution.

Meets BS EN997:2018

SW00-120	Childrens height WC
Mandatory o	iccessories:
FLSY0003	Aquafix cistern kit 1 1/2"
SW00-121	Flushino toilet seat - White
Choose from	the Flushino plates on the opposite page






## FLUSHINO TOILET SEAT

Flushino range toilet seat for use with our back to wall pan. Made from robust and hygienic ABS plastic. Includes chromed brass hinges.

SW00-121	Flushino toilet seat - White
Mandatory o	iccessories:
SW00-120	Childrens height WC
FLSY0003	Aquafix cistern kit 1 1/2"
Chaoca from	the Eluchine plates on the ennecite page





# AQUAFIX INSULATED CONCEALED CISTERN KIT

AQUAFIX Concealed cistern with front access, height: 820 mm, insulated against condensation, with dual flush (6I/3I), button function transmitted to AQUAFIX flush valve via flexible cables, connection to push plate via turn-click connection, flush pipe bend with protection cap, AQUAFIX fill valve Noise Class I, angle valve R 1/2, protection box for access opening can be cut to size, with fixing brackets, without fastenings, packed in a box concealed cistern tested to DIN EN 14055, Noise Class I

FLSY0003 Aquafix cistern kit 1 1/2"
Choose from the Flushino plates on the opposite page

# FLUSHINO NURSERY PUSH PLATE - GREEN

Nursery Push plate - RAL 6032 Push plate for nursery & schools


l/w/h: 205/145/18 mm, plastic, for AQUAFIX concealed cisterns with front access, dual flush, consisting of actuator frame, push buttons, support bracket and fixing bolts, packed in a box

AQUA561 Nursery push plate - Green

Mandatory accessories:

FLSY0003 Aquafix cistern kit 1 1/2"






## FLUSHINO NURSERY PUSH PLATE - RED

Nursery Push plate - RAL 3003 Push plate for nursery & schools I/w/h: 205/145/18 mm, plastic, for AQUAFIX concealed cisterns with front access, dual flush, consisting of actuator frame, push buttons, support bracket and fixing bolts, packed in a box

AQUA559 Nursery push plate - Red

Mandatory accessories:
FLSY0003 Aquafix cistern kit 1 1/2"






# FLUSHINO NURSERY PUSH PLATE - BLUE

Nursery Push plate - RAL 5002 Push plate for nursery & schools I/w/h: 205/145/18 mm, plastic, for AQUAFIX concealed cisterns with front access, dual flush, consisting of actuator frame, push buttons, support bracket and fixing bolts, packed in a box

AQUA558 Nursery push plate - Blue
Mandatory accessories:
FLSY0003 Aquafix cistern kit 1 1/2"





## FLUSHINO NURSERY PUSH PLATE - YELLOW

Nursery Push plate - RAL 1023 Push plate for nursery & schools

l/w/h: 205/145/18 mm, plastic, for AQUAFIX concealed cisterns with front access, dual flush, consisting of actuator frame, push buttons, support bracket and fixing bolts, packed in a box

AQUA560 Nursery push plate - Yellow


Mandatory accessories:

FLSY0003 Aquafix cistern kit 1 1/2"

Nursery washrooms 1



# Baby change units



## **CAMBRINO HORIZONTAL BABY CHANGING TABLE**

CAMBRINO horizontal baby changing table for wall mounting, made of polypropylene with antibacterial Biocote® protection, white colour, hinged, with integrated shock absorber for safe opening and closing, nylon safety belt and hooks on both sides, lockable dispenser for single-use paper covers in Interfold folding with maximum width 260mm. Certified according to EN 12221-1 and EN 12221-2. Including mounting material and 80 single-use paper covers.

Dimensions when closed 860 x 565 x 100mm (W x H x D) Dimensions when open 860 x 480 x 570mm (W x H x D)

**CAMB10HP** Horizontal changing table - plastic




## **CAMBRINO VERTICAL BABY CHANGING TABLE**

CAMBRINO vertical baby changing table for wall mounting, made of polypropylene with antibacterial Biocote® protection, white colour, hinged, with integrated shock absorber for safe opening and closing, nylon safety belt and hooks on both sides, lockable dispenser for single-use paper covers in Interfold folding with maximum width 260mm. Certified according to EN 12221-1 and EN 12221-2. Including mounting material and 80 single-use paper covers.

Dimensions when closed  $550 \times 890 \times 100$ mm (W x H x D) Dimensions when open  $550 \times 480 \times 890$ mm (W x H x D)

**CAMB20VP** Vertical changing table - plastic




# CAMBRINO HORIZONTAL BABY CHANGING TABLE WITH STAINLESS STEEL COVER

CAMBRINO horizontal baby changing table for wall mounting, made of polypropylene with antibacterial Biocote® protection, white colour, front panel made of stainless steel, hinged, with integrated shock absorber for safe opening and closing, nylon safety belt and hooks on both sides, lockable dispenser for singleuse paper covers in Interfold folding with maximum width 260mm. Certified according to EN 12221-1 and EN 12221-2. Including mounting material and 80 single-use paper covers.

Dimensions when closed  $860 \times 565 \times 100$ mm (W x H x D) Dimensions when open  $860 \times 480 \times 570$ mm (W x H x D)

**CAMB11HS** Horizontal changing table - s/steel

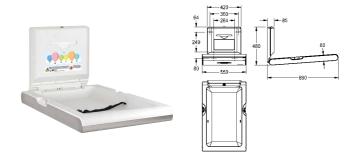


# CAMBRINO VERTICAL BABY CHANGING TABLE WITH STAINLESS STEEL COVER

CAMBRINO vertical baby changing table for wall mounting, made of polypropylene with antibacterial Biocote® protection, white colour, front panel made of stainless steel, hinged, with integrated shock absorber for safe opening and closing, nylon safety belt and hooks on both sides, lockable dispenser for single-use paper covers in Interfold folding with maximum width 260mm. Certified according to EN 12221-1 and EN 12221-2. Including mounting material and 80 single-use paper covers.

Dimensions when closed  $550 \times 890 \times 100$ mm (W x H x D) Dimensions when open  $550 \times 480 \times 890$ mm (W x H x D)

**CAMB22VS** Vertical changing table - s/steel






# **CAMBRINO SOLID SURFACE BABY CHANGE 1.5 METRE**

Cambrino solid surface baby changing unit for wall mounting. Manufactured from MIRANIT resin-bonded mineral material, with smooth, pore-free surface (temperature-resistant up to 80 °C). Colour Alpine white. With seamless. Left and right hand versions available.

Dimensions: 1500 x 114 x 530mm

ANMW0029	Left hand change right hand bowl		
ANMW0025	Right hand change left hand bowl		
Complimenta	ry accessories:		
AT03-011	Aquarius A45 tap		
AT00-220	Single station kit		
AC17-047	TMV3		





# CAMBRINO SOLID SURFACE BABY CHANGE 2 METRE

Cambrino solid surface baby changing unit for wall mounting. Manufactured from MIRANIT resin-bonded mineral material, with smooth, pore-free surface (temperature-resistant up to 80 °C). Colour Alpine white. With seamless. Left and right hand versions available.

Dimensions: 2000 x 114 x 530mm


ANMW0028	Left hand change right hand bowl
ANMW0024	Right hand chnage left hand bowl
Complimenta	ry accessories:
AT03-011	Aquarius A45 tap
AT00-220	Single station kit
AC17-047	TMV3

Baby change



# Premium, high capacity, automatic soap dispensers






## PILLAR SOAP DISPENSER - CHROME

Pillar soap dispenser, manufactured from brass with a chrome finish. Designed with a touch-free operation and minimalistic easy to clean designed. These dispensers are suitable for a wide range of environments including; hospitals, airports, motorway services, food preparation facilities, supermarkets and more. Includes mains PSU & battery unit (batteries not included).

Mains PSU and battery unit can also be used simultaneously in order to enable battery back up feature.

Spout projection: 127mm Soap bottle capacity: 1.8 litres

**SD01-003** Pillar soap dispenser - Chrome




## PILLAR SOAP DISPENSER - BRUSHED

Pillar soap dispenser, manufactured from brass with a brushed nickel finish. Designed with a touch-free operation and minimalistic easy to clean designed. These dispensers are suitable for a wide range of environments including; hospitals, airports, motorway services, food preparation facilities, supermarkets and more. Includes mains PSU & battery unit (batteries not included).

Mains PSU and battery unit can also be used simultaneously in order to enable battery back up feature.

Spout projection: 127mm Soap bottle capacity: 1.8 litres

**SD01-008** Pillar soap dispenser - Brushed



# **DECK MOUNTED SOAP DISPENSER - BRUSHED**


Deck mounted A45 soap dispenser, manufactured from brass. Touch-free operation and minimalistic easy to clean design. Available in either a chrome or brushed finish, these dispensers are suitable for a wide range of environments including; hospitals, airports, motorway services, food preparation facilities, supermarkets and more. Includes mains PSU & battery unit (batteries not included).

Mains PSU and battery unit can also be used simultaneously in order to enable battery back up feature.

Spout projection: 127mm Soap bottle capacity: 1.8 litres

SD01-012 Nickel brush finish Chrome finish





## WALL MOUNTED SOAP DISPENSER - CHROME

Wall mounted soap dispenser, manufactured from brass with a chrome finish. Designed with a touch-free operation and minimalistic easy to clean designed. These dispensers are suitable for a wide range of environments including; hospitals, airports, motorway services, food preparation facilities, supermarkets and more. Includes mains PSU & battery unit (batteries not included).

Mains PSU and battery unit can also be used simultaneously in order to enable battery back up feature.

Spout projection: 125mm Soap bottle capacity: 1.8 litres

**SD01-001** Wall mounted soap dispenser - Chrome







# WALL MOUNTED SOAP DISPENSER - BRUSHED

Wall mounted soap dispenser, manufactured from brass with a brushed nickel finish. Designed with a touch-free operation and minimalistic easy to clean designed. These dispensers are suitable for a wide range of environments including; hospitals, airports. motorway services, food preparation facilities, supermarkets and more. Includes mains PSU & battery unit (batteries not included).


Mains PSU and battery unit can also be used simultaneously in order to enable battery back up feature.

Spout projection: 105mm Soap bottle capacity: 1.8 litres

**SD01-005** Wall mounted soap dispenser - Brushed







# **SWAN SOAP DISPENSER - CHROME**

Deck mounted Swan soap dispenser, manufactured from brass. Touch-free operation and minimalistic easy to clean design. Available in either a chrome or brushed finish, these dispensers are suitable for a wide range of environments including; hospitals, airports, motorway services, food preparation facilities, supermarkets and more. Includes mains PSU & battery unit (batteries not included).

Mains PSU and battery unit can also be used simultaneously in order to enable battery back up feature.


Spout projection: 120mm Soap bottle capacity: 1.8 litres

**SD01-002** Swan soap dispenser - Chrome

Washroom accessories Washroom accessories

# Automatic Soap Dispensers






## **EXOS. ELECTRONIC SOAP DISPENSER - WHITE**

Touch free soap dispenser for wall mounting, stainless steel with satin finish, front and casing with InoxPlus surface refinement for the reduction of finger marks and better cleaning characteristics (easy to clean), material thickness 1.2mm, inspection window on side, infrared sensor activity for non-touch operation, LED display shows battery status, requires 4 pieces 1.5 V AA batteries, suitable for liquid soap and lotions, includes 800 ml refill tank, dispenses 0.6 - 1.1 ml depending on soap, includes mounting materials.

Dimensions 120 x 325 x 120mm (W x H x D)

**EXOS625W** White toughened safety glass front







#### **EXOS. ELECTRONIC SOAP DISPENSER - STEEL**

Touch free soap dispenser for wall mounting, stainless steel with satin finish, front and casing with InoxPlus surface refinement for the reduction of finger marks and better cleaning characteristics (easy to clean), material thickness 1.2mm, inspection window on side, infrared sensor activity for non-touch operation, LED display shows battery status, requires 4 pieces 1.5 V AA batteries, suitable for liquid soap and lotions, includes 800 ml refill tank, dispenses 0.6 - 1.1 ml depending on soap, includes mounting materials.

Dimensions 120 x 325 x 120mm (W x H x D)

EXOS625X Stainless steel front





# EXOS. ELECTRONIC SOAP DISPENSER - BLACK

Touch free soap dispenser for wall mounting, stainless steel with satin finish, front and casing with InoxPlus surface refinement for the reduction of finger marks and better cleaning characteristics (easy to clean), material thickness 1.2mm, inspection window on side, infrared sensor activity for non-touch operation, LED display shows battery status, requires 4 pieces 1.5 V AA batteries, suitable for liquid soap and lotions, includes 800 ml refill tank, dispenses 0.6 - 1.1 ml depending on soap, includes mounting materials.

Dimensions 120 x 325 x 120mm (W x H x D)

**EXOS625B** Black toughened safety glass front

A splash of colour

# NEW The Dartmouth Soap Dispensers







AT10-081 Dartmouth SD Gold



AT10-080 Dartmouth SD Black


Introducing the elegant and functional Dartmouth Touch-Free Soap Dispenser - the perfect addition to your washroom. This dispenser is made of high-quality 304 stainless steel and is available in a beautiful satin finish or an extremely durable PVD coating in a variety of colours. The wall-mounted casing is designed to be vandal-resistant, ensuring that your dispenser looks it's best for longer. It also comes with a battery-low LED indicator, giving you peace of mind that the dispenser will always be ready to use. The touch-free operation feature helps to reduce cross-contamination and improves washroom hygiene - making it perfect for any public washroom.

Pair it with the Kingswear and Brixham ranges for an ultimate washroom solution where style is given the highest priority. With the Dartmouth Touch-Free Soap Dispenser, you can add a splash of colour and style to your washroom while maintaining the highest level of hygiene.

Sensor detection range: 5cm (approx)
Dimensions: 110 x 268 x 107mm

# Soap Dispensers





## KWC BASIC SOAP DISPENSER - CHROME


KWC basic soap dispenser. Easily refillable from top without disassembly. Designed to be deck mounted with mounting hole size ø26mm. Supplied with soap pump an dcontainer with filling capacity of 320ml.

Chrome

Dimensions: 49 x 82 x 98mm

Z.538.409.000






## **DECK MOUNTED SOAP DISPENSER**

Soap dispenser for table top mounting into worktops with max. 45mm thickness, high polished chromated brass, requires 22mm drilling hole, 1/2" thread, spout not movable, spout length 140mm, suitable for liquid soaps and lotions, 1 liter soap tank with membrane for pressure balance, filled from above.

With standard body lenght (85mm) Dimensions: 44 x 400 x 162mm

SD80 Deck mounted soap dispenser





# KWC BASIC SOAP DISPENSER - STEEL


KWC basic soap dispenser. Easily refillable from top without disassembly. Designed to be deck mounted with mounting hole size ø26mm. Supplied with soap pump an dcontainer with filling capacity of 320ml.

Dimensions: 49 x 82 x 98mm

Z.538.409.177

Brushed steel






# WALL MOUNTED SOAP DISPENSER

Soap dispenser for wall mounting and re-filling from Serviceroom behind the wall, high polished chromated brass, requires 18mm drilling hole, 3/8" thread, spout not movable, suitable for liquid soaps and lotions, without soap tank (can be directly connected to soap can), for filling from behind the wall.

Dimensions 50 x 50 x 634mm

**SD110** Wall mounted soap dispenser






# KWC BASIC SOAP DISPENSER - BLACK

KWC basic soap dispenser. Easily refillable from top without disassembly. Designed to be deck mounted with mounting hole size ø26mm. Supplied with soap pump an dcontainer with filling capacity of 320ml.

Dimensions: 49 x 82 x 98mm

Z.538.409.176





# RODAN SOAP DISPENSER


Soap dispenser for wall mounting, stainless steel, surface satin finished, material thickness 0.8mm, folded front cover, cylinder lock with KWC standard key, suitable for liquid soaps and lotions, 0.8 liter soap tank, lever to pull, includes stainless steel screws and dowels.

RODX618	Manual	116 x 321 x 143mm	
RODX625	Sensor	120 x 296 x 107mm	

Washroom accessories

# Soap Dispensers






## KWC ZOE SOAP DISPENSER

KWC Zoe soap dispenser, manufactured with either a chrome or steel finish. Designed to be easily refilled from the top without requiring disassembly. It features a mounting hole with a diameter of 26mm. The package includes the pump and a soap container with a filling capacity of 350 ml, identified as Z.635.713. If needed, the Z.536.291.000 or Z.536.292.700, can be ordered separately as optional components.

Dimensions: 44 x 95 x 100mm

**Z.536.586.000** Chrome finish **Z.536.586.127** Steel finish






## KWC AVA SOAP DISPENSER - CHROME

KWC Ava soap dispenser with a chrome finish. Designed to allow convenient top refilling without the need for disassembly. It features a mounting hole with a diameter of ø26mm for easy installation. The package includes a pump and a soap container with a filling capacity of 350 ml, identified as Z.635.713.

Dimensions: 31.5 x 85 x 116mm

Z.536.159.000






#### **KWC ZOE SOAP DISPENSER - WHITE**

KWC Zoe soap dispenser, manufactured with a white finish. Designed for effortless refilling from the top, eliminating the need for any disassembly. It is equipped with a mounting hole that has a diameter of ø26mm for easy installation. The package includes a pump and a soap container with a generous capacity of 350 ml, identified as Z.635.713. If needed, the Z.536.291.000 or Z.536.292.700, can be ordered separately as optional components

Dimensions:  $44 \times 95 \times 100$ mm

Z.536.586.150






## **KWC AVA SOAP DISPENSER - STEEL**

KWC Ava soap dispenser with steel finish. Designed to allow convenient top refilling without the need for disassembly. It features a mounting hole with a diameter of ø26mm for easy installation. The package includes a pump and a soap container with a filling capacity of 350 ml, identified as Z.635.713.

Dimensions: 31.5 x 85 x 116mm

Z.536.159.127






# KWC ZOE SOAP DISPENSER - BLACK

KWC Zoe soap dispenser, manufactured with a matte black finish. Designed for convenient top-refilling without the need for disassembly. It has a mounting hole diameter of 26mm. The package includes a pump and a soap container with a capacity to hold 350 ml, identified as Z.635.713.

Dimensions: 44 x 95 x 100mm

Z.536.586.176





# KWC AVA SOAP DISPENSER - BLACK


KWC Ava soap dispenser with black finish. Designed to allow convenient top refilling without the need for disassembly. It features a mounting hole with a diameter of ø26mm for easy installation. The package includes a pump and a soap container with a filling capacity of 350 ml, identified as Z.635.713.

Dimensions:  $31.5 \times 85 \times 116$ mm

Z.536.159.176

Washroom accessories

# Waste management




## EXOS. PREMIUM WALL MOUNTED 30 LITRE WASTE BIN - WHITE

Manufactured from 1.2mm thick grade 1.4301 (304) stainless steel with a satin polish finish and InoxPlus surface refinement which helps reduce the appearance of fingerprints and aids cleaning. Holds approximately 30 litre with integrated bag holder, and mounting bracket. Fixings are included.

3 colour choices Capacity: 30 litre waste bin Mounting: Wall mounted Dimensions: 300 x 572 x 250mm

**EXOS605W** White toughened safety glass front






## RODAN WALL MOUNTED 18 LITRE OPEN TOP WASTE BIN

Manufactured from 0.8mm thick grade 1.4301 (304) stainless steel with a satin polish finish and self-closing waste flap. Holds approximately 18 litres. Mounting bracket and fixings are included.

Capacity: 18 litre waste bin Mounting: Wall mounted Dimensions: 275 x 460 x 177mm

**RODX605S** Rodan wall mounted 18 litre open top waste bin




## **EXOS. PREMIUM WALL MOUNTED 30 LITRE WASTE BIN - STEEL**

Manufactured from 1.2mm thick grade 1.4301 (304) stainless steel with a satin polish finish and InoxPlus surface refinement which helps reduce the appearance of fingerprints and aids cleaning. Holds approximately 30 litre with integrated bag holder, and mounting bracket. Fixings are included.

3 colour choices
Capacity: 30 litre waste bin
Mounting: Wall mounted
Dimensions: 300 x 572 x 250mm

EXOS605X Stainless steel front






## RODAN WALL MOUNTED 23 LITRE OPEN TOP WASTE BIN

Manufactured from 0.8mm thick grade 1.4301 (304) stainless steel with a satin polish finish and self-closing waste flap. Holds approximately 23 litres. Mounting bracket and fixings are included.

Capacity: 23 litre waste bin Mounting: Wall mounted Dimensions: 355 x 460 x 168mm

RODX605 Waste bin
E-RODX605N Waste bin bag holder




# EXOS. PREMIUM WALL MOUNTED 30 LITRE WASTE BIN - BLACK

Manufactured from 1.2mm thick grade 1.4301 (304) stainless steel with a satin polish finish and InoxPlus surface refinement which helps reduce the appearance of fingerprints and aids cleaning. Holds approximately 30 litre with integrated bag holder, and mounting bracket. Fixings are included.

3 colour choices Capacity: 30 litre waste bin Mounting: Wall mounted Dimensions: 300 x 572 x 250mm

**EXOS605B** Black toughened safety glass front





# RODAN WALL MOUNTED 60 LITRE OPEN TOP WASTE BIN

Manufactured from 0.8mm thick grade 1.4301 (304) stainless steel with a satin polish finish and self-closing waste flap. Holds approximately 60 litres, Mounting bracket and fixings are included.


Capacity: 60 litre waste bin Mounting: Wall mounted Dimensions: 480 x 620 x 210mm

RODX607 Open top waste bin RODX608 Self-closing lid

Washroom accessories Washroom accessories

# Hand Drying





## AIRBLAST HIGH POWERED HAND DRYER - WHITE

Airblast high powered white hands-under dryer. Ideal for retrofit as the larger body covers screw holes from previous dryers. The Airblast has hygienic touch free operation with blue downlight, and an energy-efficient motor with a switch to chose either ambient or warm air.

Dry time: 10 – 12 sec Supply voltage: 220 – 240 V, 50 – 60 Hz Overall performance: 550 – 1400 W Noise: 78 dB @ 1m Air speed: 110 m/s Dimensions: 295 x 320 x 165mm

F1390





## AIRBLAST HIGH POWERED HAND DRYER - STEEL

Airblast high powered steel hands-under dryer. Ideal for retrofit as the larger body covers screw holes from previous dryers. The Airblast has hygienic touch free operation with blue downlight, and an energy-efficient motor with a switch to chose either ambient or warm air.

Dry time: 10-12 sec Supply voltage: 220-240 V, 50-60 Hz Overall performance: 550-1400 W Noise: 78 dB @ 1m Air speed: 110 m/s Dimensions:  $295 \times 320 \times 165$ mm

F1392





# ${\bf AIRBLAST\,HIGH\,POWERED\,HAND\,DRYER-BLACK}$

Airblast high powered black hands-under dryer. Ideal for retrofit as the larger body covers screw holes from previous dryers. The Airblast has hygienic touch free operation with blue downlight, and an energy-efficient motor with a switch to chose either ambient or warm air.

Dry time: 10 – 12 sec Supply voltage: 220 – 240 V, 50 – 60 Hz Overall performance: 550 – 1400 W Noise: 78 dB @ 1m Air speed: 110 m/s Dimensions: 295 x 320 x 165mm

F139

A splash of colour

# NEW The Dartmouth Hand Dryers







3600003365 Dartmouth HD - Steel

AT10-043 Dartmouth HD - Gold

AT10-042 Dartmouth HD - Black

Introducing the Dartmouth eco compact hand dryer - a sleek and stylish addition to any washroom. This touch-free hand dryer is made of grade 304 stainless steel which is durable and easy to clean. The hand dryer is available in a satin or PVD finish in a range of colours, making it easy to match with your washroom decor. With a dry time of just 10 seconds, the Dartmouth eco compact hand dryer is not only fast but also hygienic, helping to reduce the spread of germs.

The hand dryer comes with an automatic shut-off feature after 60 seconds, saving energy and reducing costs. The sensing range is adjustable between 170mm ± 20mm, making it easy to customise the hand dryer to your washroom's needs. It is CE and UKCA certified, ensuring its safety and quality for everyday use.

The compact design of the Dartmouth eco compact hand dryer makes it suitable for any washroom, even those with limited space. Additionally, it has an IP24 rating, making it suitable for use in damp environments. The hand dryer also features a HEPA filter, which reduces airborne bacteria and viruses, promoting a clean and safe washroom environment.

Dry time: 9 sec

Standby power: 0.3 -0.4W

Air speed: 65 - 92 m/s adjustable


Supply voltage: 220 – 240 V, 50 – 60 Hz

Noise: Min 69 dB @ to 76 dB max

Dimensions: 152 x 268 x 100mm

# Hand drying





#### **EXOS HAND DRYER - WHITE**


Hand dryer for wall mounting, stainless steel with satin-finish and InoxPlus surface refinement for the reduction of finger marks and better cleaning characteristics (easy to clean), material thickness 1.2mm, with contactless opto-electronic sensor for touch-free operation, adjustable hot air temperature, sensor range adjustable from 10 to 25 cm, protection from continuous operation with automatic switch-off after 60 seconds, air speed adjustable, cable and plug not included.

Operating voltage 220-240V AC, 50-60 Hz Total power 800-1000 W Heater 500 W Motor 500 W Air volume 80 m³/h Air velocity 95 - 115 m/s

Dimensions 200 x 325 x 120mm (W x H x D)

**EXOS220W** White toughened safety glass front





## **EXOS HAND DRYER - STEEL**


Hand dryer for wall mounting, stainless steel with satin-finish and InoxPlus surface refinement for the reduction of finger marks and better cleaning characteristics (easy to clean), material thickness 1.2mm, with contactless opto-electronic sensor for touch-free operation, adjustable hot air temperature, sensor range adjustable from 10 to 25 cm, protection from continuous operation with automatic switch-off after 60 seconds, air speed adjustable, cable and plug not included.

Operating voltage 220-240V AC, 50-60 Hz Total power 800-1000 W Heater 500 W Motor 500 W Air volume 80 m³/h Air velocity 95 - 115 m/s

Dimensions 200 x 325 x 120mm (W x H x D)

**EXOS220X** Stainless steel front





# **EXOS HAND DRYER- BLACK**


Hand dryer for wall mounting, stainless steel with satin-finish and lnoxPlus surface refinement for the reduction of finger marks and better cleaning characteristics (easy to clean), material thickness 1.2mm, with contactless opto-electronic sensor for touch-free operation, adjustable hot air temperature, sensor range adjustable from 10 to 25 cm, protection from continuous operation with automatic switch-off after 60 seconds, air speed adjustable, cable and plug not included.

Operating voltage 220-240V AC, 50-60 Hz Total power 800-1000 W Heater 500 W Motor 500 W Air volume 80 m³/h Air velocity 95 - 115 m/s

Dimensions 200 x 325 x 120mm (W x H x D)

**EXOS220B** Black toughened safety glass front






## HANDS IN HAND DRYER

High speed hand dryer for wall mounting, with silver antibacterial ABS casing. Warm or ambient air, adjustable speed and auto shutdown after 25 seconds. Touch free opto-electronically controlled and integrated HEPA filter. The water drainage channel can be cleaned through the removable side panel and tank is easily removed to empty. Ingress Protection rated IPX4.

Dry time: 7 - 10 sec Supply voltage 220-240 V, 50-60 Hz Overall performance 1250-1650 W Noise 65-69 dB @ 1m Air speed 75-100 m/s Water tank capacity 800 ml Dimensions:300 x 699 x 230mm

**DRYX600** Hands in hand dryer






## **RODAN PAPER TOWEL DISPENSER**

Paper towel dispenser for wall mounting, stainless steel, surface satin finished, material thickness 0.8mm, folded front cover, cylinder lock with KWC standard key, inspection windows on sides, loading capacity 300 - 400 pcs. of paper depending on convolution, includes stainless steel screws and dowels.

Dimensions: 275 x 355 x 112mm

**RODX600** Rodan paper towel dispenser





# RODAN ELECTRONIC PAPER TOWEL DISPENSER

Touch free paper towel dispenser for wall mounting, stainless steel, surface satin finished, material thickness 0.8mm, folded cover with cylinder lock and standard KWC key, infrared sensor activity for non-touch operation, integrated tear-off edge, needs 4 pcs. standard D 1.5 V batteries, maintenance free mechanic and easy paper roll change mechanism, for rolls with max. width 205mm and max. diameter 200mm, paper length adjustable to 200, 250 and 300mm, includes stainless steel screws and dowels.


Dimensions: 290 x 390 x 224mm

**RODX630** Rodan electronic paper towel dispenser

Washroom accessories

# Hand Drying






# **EXOS. PAPER TOWEL DISPENSER - WHITE**

Paper towel dispenser for wall mounting, stainless steel with satin finish, front and casing with InoxPlus surface refinement for the reduction of finger marks and better cleaning characteristics (easy to clean), material thickness 1.2mm, inspection window on side, capacity 300 - 400 pieces of Z-folded paper, includes mounting materials.

Dimensions  $300 \times 325 \times 120$ mm (W x H x D)

**EXOS600W** White toughened safety glass front






# EXOS. PAPER TOWEL DISPENSER - STEEL

Paper towel dispenser for wall mounting, stainless steel with satin finish, front and casing with InoxPlus surface refinement for the reduction of finger marks and better cleaning characteristics (easy to clean), material thickness 1.2mm, inspection window on side, capacity 300 - 400 pieces of Z-folded paper, includes mounting materials.

Dimensions 300 x 325 x 120mm (W x H x D)

**EXOS600X** Stainless steel front





# EXOS. PAPER TOWEL DISPENSER - BLACK

Paper towel dispenser for wall mounting, stainless steel with satin finish, front and casing with InoxPlus surface refinement for the reduction of finger marks and better cleaning characteristics (easy to clean), material thickness 1.2mm, inspection window on side, capacity 300 - 400 pieces of Z-folded paper, includes mounting materials.


Dimensions 300 x 325 x 120mm (W x H x D)

**EXOS600B** Black toughened safety glass front



# Toilet Roll Holders






# RODAN DOUBLE TOILET ROLL HOLDER

Double toilet roll holder with spindle system for wall mounting, stainless steel, surface satin finished, material thickness 0.8mm, folded front cover, cylinder lock with KWC standard key, for 2 rolls with max. diameter 120mm, second roll will be released after consumption of first roll, with spindles, reserve roll not visible, includes stainless steel screws and dowels.

Dimensions 144 x 301 x 138mm

RODX672 Rodan double toilet roll holder




# EXOS. PREMIUM WALL MOUNTED DOUBLE TOILET ROLL HOLDER - WHITE

Manufactured from 1.2mm thick grade 1.4301 (304) stainless steel with a satin polish finish and InoxPlus surface refinement which helps reduce the appearance of fingerprints and aids cleaning.

Dimensions: 147 x 193 x 280mm

**EXOS676W** Wall mounted double toilet roll holder - White






## RODAN TOILET ROLL HOLDER

Toilet roll holder for wall mounting, stainless steel, surface satin finished, material thickness 0.8mm, folding cover, for 1 roll with max. diameter 130mm, includes stainless steel screws and dowels.

Dimensions: 135 x 130 x 25mm

RODX678 Rodan toilet roll holder

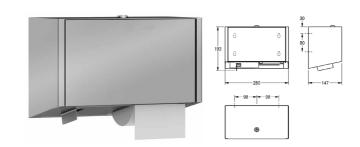


# EXOS. PREMIUM WALL MOUNTED DOUBLE TOILET ROLL HOLDER - STEEL

Manufactured from 1.2mm thick grade 1.4301 (304) stainless steel with a satin polish finish and InoxPlus surface refinement which helps reduce the appearance of fingerprints and aids cleaning.

Dimensions: 147 x 193 x 280mm

**EXOS676X** Wall mounted double toilet roll holder - Steel






# JUMBO TOILET ROLL HOLDER

Jumbo roll holder for wall mounting, stainless steel, surface satin finished, material thickness 0.8mm, cylinder lock with KWC standard key, closed round casing with inspection window, paper withdrawal over two tear-off edges, for 1 roll with max. diameter 260mm, includes stainless steel screws and dowels.

**CHRX670** 369 x 369 x 108mm **CHRX669** 269 x 269 x 116mm




# EXOS. PREMIUM WALL MOUNTED DOUBLE TOILET ROLL HOLDER - BLACK

Manufactured from 1.2mm thick grade 1.4301 (304) stainless steel with a satin polish finish and InoxPlus surface refinement which helps reduce the appearance of fingerprints and aids cleaning.

Dimensions: 147 x 193 x 280mm

**EXOS676B** Wall mounted double toilet roll holder - Black

Washroom accessories 1

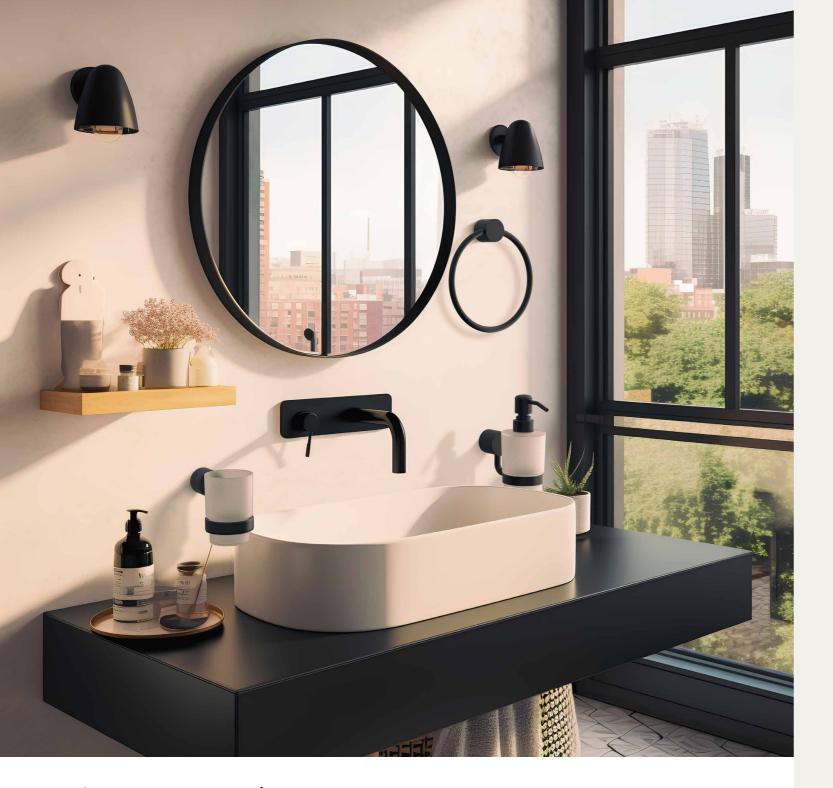

# GARDA: Elegant Essentials

Aesthetically pleasing, robust

and incredibly versatile



GARDA Single Towel Rail GARX001C / 2030068189 (Chrome finish) GARX001B / 2030068224 (Matt black finish)



GARDA Double Towel Rack
GARX012C / 3600005048 (Chrome finish)
GARX012B / 3600005049 (Matt black finish)



GARX104C/2030068220 (Chrome finish)
GARX104B/2030068229 (Matt black finish)



GARDA Single Robe Hook GARX010C / 3600005046 (Chrome finish) GARX010B / 3600005047 (Matt black finish)



GARDA Double Robe Hook
GARX0110C / 2030068218 (Chrome finish)
GARX0110B / 2030068227 (Matt black finish)



GARDA Soap dish
GARX007C / 2030068219 (Chrome finish)
GARX007B / 2030068228 (Matt black finish)



GARDA Tumbler Holder
GARX006C / 2030068221 (Chrome finish)
GARX006B / 2030068230 (Matt black finish)



GARDA Soap Dispenser GARX008C / 2030068868 (Chrome finish) GARX008B / 3600005052 (Matt black finish)



GARX111C / 2030068196 (Chrome finish)
GARX111B / 2030068226 (Matt black finish)



GARDA Toilet Brush Holder
GARX005C / 2030068222 (Chrome finish)
GARX005B / 2030068232 (Matt black finish)

Bathroom accessories 181





Visually appealing and functional




VICO Single Towel Rail
VICX001C / 2030068233 (Chrome finish)
VICX001B / 2030068240 (Matt black finish)



VICO Double Towel Rack
VICX012C / 3600005050 (Chrome finish)
VICX012B / 3600005051 (Matt black finish)



VICO Towel Arm VICX004C / 2030068237 (Chrome finish) VICX004B / 2030068244 (Matt black finish)



VICO Single Robe Hook VICX010C / 3600002522 (Chrome finish) VICX010B / 3600002523 (Matt black finish)



VICO Double Robe Hook
VICX0110C / 2030068235 (Chrome finish)
VICX0110B / 2030068242 (Matt black finish)



VICO Soap dish
VICX007C / 2030068236 (Chrome finish)
VICX007B / 2030068243 (Matt black finish)



VICO Tumbler Holder
VICX006C / 2030068238 (Chrome finish)
VICX006B / 2030068245 (Matt black finish)



VICO Soap Dispenser
VICX008C / 2030068718 (Chrome finish)
VICX008B / 2030068617 (Matt black finish)



VICO Toilet Roll Holder
VICX111C / 2030068234 (Chrome finish)
VICX111B / 2030068341 (Matt black finish)



VICO Toilet Brush Holder VICX005C / 2030068239 (Chrome finish) VICX005B / 2030068246 (Matt black finish)

Bathroom accessories 183

# Bathroom accessories



#### **CUBUS TOWEL ARM**

Manufactured from high polished grade 304 stainless steel. Designed with concealed fixings. Mounting: Wall mounted Finish: High polished Dimensions: 85 x 262 x 54mm

CUBX004HP High polished CUBX004



#### **CUBUS SINGLE TOWEL RAIL**

Manufactured from high polished grade 304 stainless steel Designed with concealed fixings. Mounting: Wall mounted Finish: High polished Dimensions: 80 x 600 x 54mm

CUBX001HP High polished CUBX001



#### **CUBUS DOUBLE TOWEL RAIL**

Manufactured from high polished grade 304 stainless steel. Designed with concealed fixings Mounting: Wall mounted Finish: High polished Dimensions: 125 x 600 x 54mm

CUBX002HP High polished CUBX002 Satin



#### **CUBUS TOWEL RACK**

Manufactured from high polished grade 304 stainless steel. Designed with concealed fixings Mounting: Wall mounted Finish: High polished Dimensions: 220 x 600 x 122mm

CUBX012HP High polished CUBX012



## **CUBUS SINGLE ROBE HOOK**

Manufactured from high polished grade 304 stainless steel. Mounting: Wall mounted Finish: High polished Dimensions: 60 x 54 x 54mm

CUBX010HP High polished CUBX010 Satin

**CUBUS TUMBLER HOLDER** 

CUBX006HP High polished

grade 304 stainless steel.

Mounting: Wall mounted

Finish: High polished

WITH GLASS

CUBX006



## **CUBUS TOILET ROLL** HOLDER WITH COVER

Manufactured from high polished grade 304 stainless steel. Mounting: Wall mounted Finish: High polished Dimensions: 85 x 165 x 54mm

CUBX111HP High polished CUBX111



## **CUBUS TOILET ROLL HOLDER**

Manufactured from high polished grade 304 stainless steel. Mounting: Wall mounted Finish: High polished Dimensions: 165 x 85 x 54mm

CUBX211HP High polished CUBX211



## **CUBUS TOILET BRUSH** HOLDER

Manufactured from high polished grade 304 stainless steel. Mounting: Wall mounted Finish: High polished Dimensions: 135 x 147 x 340mm

CUBX005HP High polished CUBX005



#### **CUBUS SOAP DISH HOLDER** WITH GLASS

Manufactured from high polished Manufactured from high polished grade 304 stainless steel. Mounting: Wall mounted Finish: High polished Dimensions:  $135 \times 147 \times 54 \text{mm}$ Dimensions: 115 x 217 x 85mm

> CUBX007HP High polished CUBX007



## **CUBUS CORNER SHOWER** BASKET

Manufactured from high polished grade 304 stainless steel. Mounting: Wall mounted Finish: High polished Dimensions:  $95 \times 150 \times 50 \text{mm}$ 

MISX0009HP High polished MISX0009 Satin



# STRATOS CLOTHES HOOK

Manufactured from grade 1.4301 (304) stainless steel. 18mm tube with a satin polish finish. Fixings are included. Dimensions: 18 x 38 x 60mm

STRX692



# MEDIUS TOWEL ARM

Manufactured from high polished grade 304 stainless steel. Designed with concealed fixings. Mounting: Wall mounted Finish: High polished Dimensions: 170 x 65 x 60mm

MEDX004HP High polished MEDX004 Satin



#### MEDIUS TOWEL RAIL

Manufactured from high polished grade 304 stainless steel. Designed with concealed fixings. Mounting: Wall mounted Finish: High polished Dimensions: 85 x 600 x 54mm

MEDX001HP High polished MEDX001 Satin



# MEDIUS DOUBLE TOWEL RAIL

Manufactured from high polished grade 304 stainless steel. Designed with concealed fixings Mounting: Wall mounted Finish: High polished Dimensions: 125 x 600 x 54mm

MEDX002HP High polished MEDX002



#### MEDIUS TOWEL RACK

Manufactured from high polished grade 304 stainless steel. Designed with concealed fixings Mounting: Wall mounted Finish: High polished Dimensions: 220 x 600 x 120mm

MEDX012HP High polished MEDX012 Satin



# MEDIUS TOWEL RING

Manufactured from high polished grade 304 stainless steel. Mounting: Wall mounted Finish: High polished Dimensions: 65 x 177 x 198mm

MEDX104HP High polished MEDX104 Satin

MEDIUS TOILET BRUSH

grade 304 stainless steel.

Mountina: Wall mounted

Finish: High polished

MEDX005 Satin

Manufactured from high polished

Dimensions: 140 x 115 x 340mm

MEDX005HP High polished

HOLDER



# MEDIUS SINGLE ROBE

Manufactured from high polished grade 304 stainless steel. Mounting: Wall mounted Finish: High polished Dimensions: 55 x 54 x 54mm



# MEDIUS DOUBLE ROBE

Manufactured from high polished grade 304 stainless steel. Mounting: Wall mounted Finish: High polished Dimensions: 70 x 74 x 54mm

MEDX0110HP High polished

MEDX0110 Satin

MEDX010HP High polished MEDX010



# MEDIUS TOILET ROLL **HOLDER WITH COVER**

Manufactured from high polished grade 304 stainless steel. Mounting: Wall mounted Finish: High polished Dimensions: 66 x 140 x 160mm

MEDX111HP High polished MEDX111 Satin



#### MEDIUS TUMBLER HOLDER WITH GLASS

Manufactured from high polished grade 304 stainless steel. Mountina: Wall mounted Finish: High polished Dimensions: 105 x 70 x 100mm

MEDX006HP High polished MEDX006 Satin



# MEDIUS SOAP DISH WITH **GLASS DISH**

Manufactured from high polished grade 304 stainless steel. Mounting: Wall mounted Finish: High polished Dimensions: 125 x 110 x 55mm

MEDX007HP High polished MEDX007 Satin



# STRATOS CLOTHES HOOK

Manufactured from grade 1.4301 (304) stainless steel. 18mm tube with a satin polish finish. Fixings are included. Dimensions: 69 x 18 x 60mm


STRX694

Bathroom accessories



# Ligature resistant WCs





## **BACK TO WALL WC PAN**

High-security WC pan, manufactured from GRP high performance composite material. Designed and tested to be vandal-proof and avoid ligature points wherever possible. The techniques employed to construct these pans are used very successfully in the field of ballistic armour manufacturing, this results in unrivalled impact resistance. A high-grade non-porous polyester gel coat surface specially formulated to resist chemicals and ultraviolet rays comes as standard.

Dimensions: 400 x 420 x 510mm


VR01-010 White WC pan Complimentary accessories:

Painting of WC pan seat - non-standard colour



Any RAL colour is possible






# BACK TO WALL WC PAN - BLUE TOP (RAL 5011)

High-security WC pan with blue top, manufactured from GRP high performance composite material. Designed and tested to be vandalproof and avoid ligature points wherever possible. The techniques employed to construct these pans are used very successfully in the field of ballistic armour manufacturing, this results in unrivalled impact resistance. A high-grade non-porous polyester gel coat surface specially formulated to resist chemicals and ultraviolet rays comes as standard.

Dimensions: 400 x 420 x 510mm

VR01-034 Blue top WC pan





## **ACCESSIBLE WC PAN**

High-security accessible WC pan, manufactured from GRP high performance composite material. Designed and tested to be vandal-proof and avoid ligature points wherever possible. The techniques employed to construct these pans are used very successfully in the field of ballistic armour manufacturing, this results in unrivalled impact resistance. A high-grade non-porous polyester gel coat surface specially formulated to resist chemicals and ultraviolet rays comes as standard.


Dimensions: 400 x 480 x 510mm

VR01-011 White WC pan Complimentary accessories: WC spacer box SP18-035 Painting of WC pan seat - non-standard colour



Any RAL colour is possible






# ACCESSIBLE WC PAN - BLUE TOP (RAL 5011)

High-security accessible WC pan with blue top, manufactured from GRP high performance composite material. Designed and tested to be vandal-proof and avoid ligature points wherever possible. The techniques employed to construct these pans are used very successfully in the field of ballistic armour manufacturing, this results in unrivalled impact resistance. A high-grade non-porous polyester gel coat surface specially formulated to resist chemicals and ultraviolet rays comes as standard.

Dimensions: 400 x 480 x 510mm

VR01-035 Blue top WC pan Complimentary accessories: VR01-119 WC spacer box






# BACK TO WALL WC PAN - GREY TOP (RAL 7040)

High-security WC pan with grey top, manufactured from GRP high performance composite material. Designed and tested to be vandal-proof and avoid ligature points wherever possible. The techniques employed to construct these pans are used very successfully in the field of ballistic armour manufacturing, this results in unrivalled impact resistance. A high-grade non-porous polyester gel coat surface specially formulated to resist chemicals and ultraviolet rays comes as standard.

Dimensions: 400 x 420 x 510mm

VR01-071 Grey top WC pan





# ACCESSIBLE WC PAN - GREY TOP (RAL 7040)

High-security accessible WC pan with grey top, manufactured from GRP high performance composite material. Designed and tested to be vandal-proof and avoid ligature points wherever possible. The techniques employed to construct these pans are used very successfully in the field of ballistic armour manufacturing, this results in unrivalled impact resistance. A high-grade non-porous polyester gel coat surface specially formulated to resist chemicals and ultraviolet rays comes as standard.


Dimensions: 400 x 480 x 510mm

VR01-072 Grey top WC pan Complimentary accessories: VR01-119 WC spacer box

Ligature resistant and high-security Ligature resistant and high-security

# Ligature resistant WCs





## WALL HUNG WC PAN

High-security WC pan, manufactured from GRP high performance composite material. Designed and tested to be vandal-proof and avoid ligature points wherever possible. The techniques employed to construct these pans are used very successfully in the field of ballistic armour manufacturing, this results in unrivalled impact resistance. A high-grade non-porous polyester gel coat surface specially formulated to resist chemicals and ultraviolet rays comes as standard.

Fixing kit for walls up to 250mm provided as standard Dimensions:  $400 \times 370 \times 510$ mm

VR01-017 White WC pan wall hung


Complimentary accessories:

SP18-035 Painting of WC pan seat - non-standard colour



Any RAL colour is possible






# WALL HUNG WC PAN - BLUE TOP (RAL 5011)

High-security WC pan, manufactured from GRP high performance composite material. Designed and tested to be vandal-proof and avoid ligature points wherever possible. The techniques employed to construct these pans are used very successfully in the field of ballistic armour manufacturing, this results in unrivalled impact resistance. A high-grade non-porous polyester gel coat surface specially formulated to resist chemicals and ultraviolet rays comes as standard.

Fixing kit for walls up to 250mm provided as standard Dimensions:  $400 \times 370 \times 510$ mm

VR01-036 Blue WC pan wall hung






# WALL HUNG WC PAN - GREY TOP (RAL 7040)

High-security WC pan, manufactured from GRP high performance composite material. Designed and tested to be vandal-proof and avoid ligature points wherever possible. The techniques employed to construct these pans are used very successfully in the field of ballistic armour manufacturing, this results in unrivalled impact resistance. A high-grade non-porous polyester gel coat surface specially formulated to resist chemicals and ultraviolet rays comes as standard.

Fixing kit for walls up to 250mm provided as standard Dimensions:  $400 \times 370 \times 510$ mm

VR01-073 Grey WC pan wall hung





## CORNER FIT WC PAN

Corner fit high-security WC pan, manufactured from GRP high performance composite material. Designed and tested to be vandal-proof and avoid ligature points wherever possible. The techniques employed to construct these pans are used very successfully in the field of ballistic armour manufacturing, this results in unrivalled impact resistance. A high-grade non-porous polyester gel coat surface specially formulated to resist chemicals and ultraviolet rays comes as standard.

Dimensions: 600 x 420 x 510mm

VR01-013 WC pan left hand corner fit VR01-014 WC pan right hand corner fit


Complimentary accessories:

SP18-035 Painting of WC pan seat - non-standard colour



Any RAL colour is possible







Enclosed fit high-security WC pan, manufactured from GRP high performance composite material. Designed and tested to be vandal-proof and avoid ligature points wherever possible. The techniques employed to construct these pans are used very successfully in the field of ballistic armour manufacturing, this results in unrivalled impact resistance. A high-grade non-porous polyester gel coat surface specially formulated to resist chemicals and ultraviolet rays comes as standard.

Dimensions: 800 x 420 x 510mm

VR01-046 WC pan enclosed fit


Complimentary accessories:

SP18-035 Painting of WC pan seat - non-standard colour



Any RAL colour is possible





## GRP ACCESSIBLE WC SPACER BOX

GRP accessible WC spacer box for "against wall" installations. Manufactured from Glass reinforced polyester with a white high gloss gelcoat finish. Designed with wheelchair access in mind, providing ease of use. Optional extra for use with all KWC DVS less-abled height back to wall WC pans.


Dimensions: 420 x 490 x 240mm

**VR01-119** WC spacer box

# Ligature resistant basins

# INFORM





## SAFE ENSUITE INTEGRATED BASIN

Safe Ensuite integrated basin, manufactured from GRP high performance composite material. Designed and tested to be vandal-proof and avoid ligature points wherever possible. The techniques employed to construct these basins are used very successfully in the field of ballistic armour manufacturing, this results in unrivalled impact resistance. A high-grade non-porous polyester gel coat surface specially formulated to resist chemicals and ultraviolet rays comes as standard.

Control, sensors and TMV3 required Dimensions: 450 x 374 x 300mm

VR01-030 Integrated basin

INFORM enabled; additional parts and subscription required to activate wireless temperature monitoring and using data. and using data.

## INFORM ENABLED







# SAFE ENSUITE SINGLE OUTLET BASIN

Safe Ensuite basin, manufactured from GRP high performance composite material. Designed and tested to be vandal-proof and avoid ligature points wherever possible. The techniques employed to construct these basins are used very successfully in the field of ballistic armour manufacturing, this results in unrivalled impact resistance. A high-grade non-porous polyester gel coat surface specially formulated to resist chemicals and ultraviolet rays comes as standard.


Control, sensors and TMV3 required Dimensions: 450 x 374 x 300mm

VR01-090	Dual sensor, single outlet
VR01-092	Single sensor, single outlet

INFORM enabled; additional parts and subscription required to activate wireless temperature monitoring and using data.









## **IN-WALL BASIN**

Safe Ensuite in wall basin, manufactured from GRP high performance composite material. Designed and tested to be vandal-proof and avoid ligature points wherever possible. The techniques employed to construct these basins are used very successfully in the field of ballistic armour manufacturing, this results in unrivalled impact resistance. A high-grade non-porous polyester gel coat surface specially formulated to resist chemicals and ultraviolet rays comes as standard.


Control, sensors and TMV3 required Dimensions: 465 x 210 x 305

VR01-085 In-wall basin

VR01-125 Dual outlet in-wall basin

INFORM enabled; additional parts and subscription required to activate wireless temperature monitoring and using data.






## SAFE ENSUITE HIGH-SIDED BASIN

Safe Ensuite integrated basin, manufactured from GRP high performance composite material. Designed and tested to be vandal-proof and avoid ligature points wherever possible. The techniques employed to construct these basins are used very successfully in the field of ballistic armour manufacturing, this results in unrivalled impact resistance. A high-grade non-porous polyester gel coat surface specially formulated to resist chemicals and ultraviolet rays comes as standard.

Control, sensors and TMV3 required Dimensions: 290 x 390 x 20

VR01-080 High-sided basin






# LOW PROFILE BASIN WITHOUT TAP HOLES

Low profile basin, manufactured from GRP high performance composite material. Designed and tested to be vandal-proof and avoid ligature points wherever possible. The techniques employed to construct these basins are used very successfully in the field of ballistic armour manufacturing, this results in unrivalled impact resistance. A high-grade non-porous polyester gel coat surface specially formulated to resist chemicals and ultraviolet rays comes as standard.

Control, sensors, TMV3, spout or backplate required Dimensions:  $465 \times 210 \times 305$ 

/R01-081	Without tap holes
/R01-082	Left hand tap hole
/R01-083	Right hand tap hole
/R01-084	Two tap holes





# NEW FOR 2024

# HIGH-SECURITY VANITY BASIN WITH TMV3

Floor standing Trespa vanity unit with integrated GRP wash basin. The basin is ligature resistant and has been designed and tested to be vandal-proof and avoid ligature points wherever possible. The techniques employed to construct these basins are used very successfully in the field of ballistic armour manufacturing, this results in unrivalled impact resistance. A high-grade non-porous polyester gel coat surface specially formulated to resist chemicals and ultraviolet rays comes as standard. Designed pre-assembled for easy installation with TMV spouts and controls included in kit form.


Available with wave-on or tactile operation Dimensions: 492 x 830 x 397mm

VR01-120	High-Security vanity basin with 2 taps and 2 sensors
VR01-121	High-Security vanity basin with 1 tap and 2 sensors
VR01-122	High-Security vanity basin no outlets
Complimento	ıry accessories:
VR01-130	Vandal resistant vanity cabinet

INFORM enabled; additional parts and subscription required to activate wireless temperature monitoring and using data.

# Ligature resistant taps and spouts






## HIGH-SECURITY WALL MOUNTED TAP SPOUT 45°

45° High-security tap spout, manufactured in 316 stainless steel with a brushed finish. Designed for mental healthcare and high security environments with fully ligature resistant design, conforming to the safer cell standards and testing. Additional TMV3 required. WRAS approved 5 litre per minute outlet.

Requires sensor and station kit to operate Additional TMV3 required Dimensions: 38 x 113 x 76mm

Wall mounted tap spout 45°





## HIGH-SECURITY WALL MOUNTED TAP SPOUT 30°

30° High-security tap spout, manufactured in 316 stainless steel with a brushed finish. Ligature-resistant design. WRAS approved 5 litre per minute outlet.

ؽ" DZR Brass BSP connection Requires sensor and station kit to operate Additional TMV3 required Dimensions: 38 x 113 x 76mm

AT07-041 Wall mounted tap spout 30°








# HIGH-SECURITY SAFE ENSUITE BACK PLATE

The High Security Safe Ensuite Backplate design is aesthetically pleasing, and is designed be used in conjunction with our latest range of Safe Ensuite Low Profile Basins.

Requires sensor and station kit to operate Additional TMV3 required Dimensions: 300 x 212 x 111mm

VR01-107 Safe ensuite back plate





## ANGLED DECK MOUNTED BASIN SPOUT

High-security deck mounted spout manufactured in 316 stainless steel with a brushed finish. Designed for mental healthcare and high security environments with fully ligature resistant design, conforming to the safer cell standards and testing. Additional TMV3

ؽ" DZR Brass BSP connection Requires sensor and station kit to operate Dimensions: 69 x 30 x 69mm

AT07-092 Basin spout

Complimentary accessories:
AC17-042 Restrictaflow in-line flow restricting valve





## HIGH-SECURITY DECK MOUNTED SPOUT

High-security deck mounted spout manufactured in 316 stainless steel with a brushed finish. Designed for mental healthcare and high security environments with fully ligature resistant design, conforming to the safer cell standards and testing. Additional TMV3 required.

DZR Brass BSP connection Requires sensor and station kit to operate Dimensions: 70 x 22 x 70mm

AT07-056 High-security spout Complimentary accessories:

AC17-042 Restrictaflow in-line flow restricting valve





# HIGH-SECURITY DECK MOUNTED SPOUT

High-security deck mounted spout manufactured in 316 stainless steel with a brushed finish. Designed for mental healthcare and high security environments with fully ligature resistant design, conforming to the safer cell standards and testing. Additional TMV3 required.

DZR Brass BSP connection Requires sensor and station kit to operate Dimensions: 48 x 20mm

High-security spout

Complimentary accessories: AC17-042 Restrictaflow in-line flow restricting valve

Ligature resistant and high-security Ligature resistant and high-security

# Ligature Resistant & High Security Showers





## ANTI-MICROBIAL SHOWERHEAD

Anti-microbial showerhead manufactured from brass with a chrome finished cover. Supplied with removable waterway that is manufactured in four different colours with anti-microbial Biomaster silver ion technology. The ligature resistant heads also feature a one-piece anti-microbial ABS outlet.


Requires sensor and station kit to operate Additional TMV3 required Dimensions: 60 x 90 x 47mm

SH07-095 Anti-microbial showerhead

Complimentary accessories:

SH00-070 Replacement Coloured Waterways (Set of 4)





# HIGH SECURITY SHOWERHEAD WITH DETACHABLE HOSE CONNECTION


High Security Showerhead with Detachable Hose Connection. The SH07-084 is intended for installations where everything except the showerhead and sensor are concealed behind a wall or panel. This product can be utilized on its own or as part of a shower pairing with the SH07-040. This showerhead can be used in conjunction with the KWC DVS Shower Control System.

Features include: – 316 Stainless steel – Easy to install – Quick release mechanism for ease of connection and disconnection of hose and handset (Hose & Handset Included) – Ideal for areas where ligature resistance is required – Wall mounted – Perfect for assisted showering areas

Additional TMV3 required Sensor and station kit required

SH07-084 High security showerhead





## STAINLESS STEEL PROGRAMMABLE SHOWER SENSOR


The NEW wall Mounted Programmable Sensor is to be used in conjunction with the handheld programmer (AC01-001). The programmer will allow quick and easy adjustment of settings including; run-on time, range, purge and more. Real time data can be uploaded from the programmer via the USB port to allow accurate monitoring of water efficiency. Available in stainless steel as standard or PVD coated in a choice of black or gold, please get in touch to enquire about coloured options.

Station kit required Dimensions: 50 x 50 x 60mm

ACO2-021 Programmable sensor

AC02-021	Programmable sensor
Mandatory o	accessories:
AT00-221	Station kit
AC17-047	TMV3






## HIGH SECURITY SHOWERHEAD - 30°

30° high-security shower head with 4 ring shower rose. Manufactured from 316 stainless steel with a brushed finish. Antiligature design, with a tamper proof security locking screw. Antirotation pins.

Additional TMV3 required Sensor and station kit required

SH07-040 High security showerhead – 30°






## FLUSH MOUNTED CEILING SHOWERHEAD

An Aesthetically pleasing take on Ceiling Height Showerheads whilst maintaining Ligature & Vandal Resistant Design. Ceiling Height High-Security Shower Head with a One-Piece Anti-Microbial ABS outlet. Anti-ligature design, with a tamper-proof security locking screw. Brushed Stainless Steel finish.

Additional TMV3 required Sensor and station kit required

SH07-047 Flush mounted ceiling showerhead






# LIGATURE RESISTANT TEMPERATURE BLENDING VALVE ADJUSTER

Temperature blending valve adjuster, manufactured from brass with a chrome finish. Designed to be robust with good aesthetics and therefore suits all applications. Manufactured with a robust construction and tamper proof design. Easy to install.

Dimensions: 70 x 70mm (W x H)

SH00-011	Wall thickness compatibility 1.5mm - 22mm
SH00-012	Wall thickness compatibility 22mm - 180mm
SH00-013	Wall thickness compatibility 180mm - 280mm
Mandatory a	ccessories:
AC17-047	TMV3





# 12V SHOWER TACTILE AND WAVE-ON SENSORS

Wave-on shower sensor manufactured from stainless steel complete with a 45mm bezel.

Complete with 15 metre cable Separate control box required Thread diameter: ½" BSP Dimensions: 45 x 45 x 73mm

SH00-003	Wave-on sensor
OR	
AC02-050	Red tactile switch (hot) (wall mount)
Mandatory o	iccessories:
AC17-101	Solenoid valve (1 required per sensor

# INFORM Outlet showers with remote monitoring and control



## NEW FOR 2024

# INFORM OUTLET CEILING HEIGHT SHOWER TOWER - TACTILE

INFORM Outlet Ceiling height shower tower, manufactured from 316 stainless steel with a brushed finish. Features an anti-microbial outlet and in-built intelligent thermistors which connect to our INFORM system. Remotely monitor temperatures, control the outlet, and collate usage data. Ligature-resistant design with concealed pipework, and in-built TMV3 for high-security applications. Designed to fit flush against the ceiling. Tactile switch is positioned 1 metre from floor level at standard 2.4metre ceiling height.

Built-in TMV3 Tactile switch operation Dimensions: 200 x 1080 x 70mm Available in White

IC04-005	INFORM shower tower - Tactile
Mandatory a	ccessories:
IC07-006	INFORM 6 channel control
OR	
IC07-012	INFORM 12 channel control

INFORM enabled; additional parts and subscription required to activate wireless temperature monitoring and using data.



# NEW FOR 2024

# INFORM OUTLET CEILING HEIGHT SHOWER TOWER - SENSOR

INFORM Outlet Ceiling height shower tower, manufactured from 316 stainless steel with a brushed finish. Features an anti-microbial outlet and in-built intelligent thermistors which connect to our INFORM system. Remotely monitor temperatures, control the outlet, and collate usage data. Ligature-resistant design with concealed pipework, and in-built TMV3 for high-security applications. Designed to fit flush against the ceiling. Sensor is positioned 1 metre from floor level at standard 2.4metre ceiling height.

Built-in TMV3
Sensor operation
Control box required
Dimensions: 200 x 1080 x 70
Available in White

INFORM Shower tower - Sensor
ccessories:
INFORM 6 channel control
INFORM 12 channel control

INFORM enabled; additional parts and subscription required to activate wireless temperature monitoring and using data.



# Ligature resistant and high security showers






# STANDARD SHOWER TOWER

Standard angled top shower tower, anufactured from 316 stainless steel with a brushed finish. Suitable for high-security applications. Designed with concealed pipework.

Wave-on sensor or tactile switch operation Dimensions:  $140 \times 830 \times 70 \text{mm}$ Available in White

SH01-002	Shower tower - Wave-on
SH01-003	Shower tower - Tactile
Mandatory ac	cessories:
SH07-001	Shower control system
AC17-047	Thermostatic mixing valve
Complimentar	y accessories:
AC17-080	Thermal disinfection valve





## STANDARD SHOWER TOWER - PUSH BUTTON

Standard angled top shower tower, manufactured from 316 stainless steel with a brushed finish.

Dimensions: 140 x 830 x 70mm Available in White

SH01-001	Shower tower
Mandatory o	accessories:
AC17-047	Thermostatic mixing valve
Compliment	ary accessories:
AC17-080	Thermal disinfection valve




# CEILING HEIGHT SHOWER PROGRAMMABLE SENSOR AND TMV3 - MAINS

Ceiling height shower tower, manufactured from 316 stainless steel with a brushed finish. Suitable for high security applications. Ligature-resistant design with concealed pipework, and in-built TMV3 for high-security applications. Fully programmable using the handheld remote. Functions include adjustable run on times, adjustable range, hygiene purge, lock outs and more.

Built-in TMV3
Sensor operation
Dimensions: 200 x 1080 x 70mm
Available in White

/ trailable in trinice	
SH04-061	Shower tower
Mandatory o	ıccessories:
AT00-221	Anti-microbial single station kit
	***************************************





## **CEILING HEIGHT SHOWER TOWER TMV3 - MAINS**

Ceiling height shower tower, manufactured from 316 stainless steel with a brushed finish. Suitable for high security applications. Ligature-resistant design with concealed pipework, and in-built TMV3 for high-security applications. Designed to fit flush against the ceiling. Control is positioned 1 metre from floor level at standard 2.4metre ceiling height.

Built-in TMV3 Tactile or sensor operation Dimensions: 200 x 1080 x 70mm Available in White

SH01-005	Tactile ceiling height shower tower
SH01-006	Sensor ceiling height shower tower
Mandatory o	iccessories:
SH07-001	Shower control system
Compliment	ary accessories:
AC17-080	Thermal disinfection valve






## **CEILING HEIGHT SHOWER TOWER - SELF-CLOSING**

Ceiling height shower tower, manufactured from 316 stainless steel with a brushed finish. Ligature-resistant design with concealed pipework, and in-built TMV3 for high-security applications. Designed to fit flush against the ceiling. Push button is positioned 1 metre from floor level at standard 2.4metre ceiling height.

Self-closing - non concussive Dimensions: 200 x 1080 x 70 Available in White

SH01-004 Ceiling height shower tower
Complimentary accessories:
AC17-080 Thermal disinfection valve





# DUAL OUTLET SHOWER TOWER


Dual outlet shower tower with detatchable hose and handset. Manufactured from 316 stainless steel with a brushed finish. Designed with ligature- resistant controls, pre-plumbed pipework and a dual outlet, so that assisted and unassisted showering can be achieved, making it well suited to high security healthcare applications. Switching between outlets is quick and easy due to the inbuilt automatic diverter valve.

TMV3 required on hot water supply Available in powder coated white upon request Dimensions: 239 x 930 x 69mm Available in White

SH01-013	Dual outlet shower tower
Mandatory o	accessories:
AC17-047	Thermostatic mixing valve
Compliment	ary accessories:
AC17-080	Thermal disinfection valve

# Ligature resistant shower gullies





# LIGATURE RESISTANT 50MM WATER SEAL GULLY WITH HORIZONTAL OUTLET FOR SHEET FLOORING

This product is a two-piece gully that features a 50mm water seal, a clamp ring, and a cover plate. The gully has a 2" horizontal outlet and a 2" x  $1\frac{1}{2}$ " socket reducer. It is designed to be used with concrete and suspended timber floors, and it has a flow rate of 48 litres per minute. The gully is ideal for use in showers and is specifically designed for use with timber floors and floor formers. Additionally, it comes with three cover plate options: white plastic, polished stainless steel, or chrome-plated brass.

TSG50-Anti/Liq

SW00-110 Ligature resistant 50mm sheet floor gully




# LIGATURE RESISTANT TWO-PIECE 50MM WATER SEAL GULLY FOR SHEET FLOORING

This is a two-piece gully with a 50mm water seal, clamp ring, and cover plate. It has a 2" horizontal outlet and a 2" x  $1\frac{1}{2}$ " socket reducer. The product comes with three cover plate options: white plastic, polished stainless steel, or chrome plated brass. It is suitable for concrete and suspended timber floors and has flow rates of 48 litres per minute. The gully is specifically designed for use with timber floors and floor formers and is ideal for showers in various settings.

TSG52-Anti/Lig

SW00-111 Ligature resistant 50mm 2 part sheet floor gully





# LIGATURE RESISTANT 75MM WATER SEAL GULLY WITH VERTICAL OUTLET FOR SHEET FLOORING

This is a 75mm water seal trapped gully with a 110mm or 2" vertical solvent spigot outlet. It comes with a clamp ring and a cover plate available in white plastic, polished stainless steel, or chrome plated brass. It is suitable for concrete and suspended timber floors, has an overall height of 130mm, and a flow rate of 48 litres per minute.

TSG2-Anti/Lig

**SW00-113** Ligature resistant 75mm Vertical sheet floor gully



# LIGATURE RESISTANT 75MM WATER SEAL GULLY WITH HORIZONTAL OUTLET FOR SHEET FLOORING

This is a sheet floor gully made of high-quality ABS material. It has a 75mm water seal, a 2" BS EN 1329-1:2020 solvent weld horizontal outlet, and comes with a 2" x  $1\frac{1}{2}$ " socket reducer. Its flow rate of 48 litres per minute exceeds the minimum requirement of EN 1253-2:2015, and it comes with a choice of white plastic, polished stainless steel, or chrome-plated brass cover plates.

TSG1-Anti/Lig

**SW00-112** Ligature resistant 75mm horizontal sheet floor gully

# NEW Home Office Approved -Ligature Resistant Shower Gully

- Made from Polished Stainless Steel & ABS to the highest quality
- Sheet floor gully suitable for concrete and suspended timber floors
- Flow rates of 48 litres per minute exceed the minimum requirement of EN 1253-2:2015 and are variable dependent on the cover plate used
- Ligature Resistant grating is designed for use in secure accommodation, is Home
   Office approved and supplied with a security screwdriver bit to release the grating.



# High security shower packs



## DEMENTIA CARE DOC M SHOWER PACK WITH LIGATURE RESISTANT GRAB RAILS

Doc M shower pack in red supplied with: Vita pro lever mixer shower, shower rail and hose, thermal disinfection valve, TMV3 thermostatic mixing valve and grab rail kit.

Grab rail kit includes:

- 1 x ligature-resistant backrest rail 400 x 150mm (RAL 3020)
- 1 x ligature-resistant white backrest cushion
- 2 x ligature-resistant hinge support rail 760 x 250mm (RAL 3020)
- 2 x ligature-resistant straight grab rail 35 x 600mm (RAL 3020)
- 1 x shower seat 650mm (RAL 3020)

# DMPXVT20R



# HIGH SECURITY LIGATURE RESISTANT DOC M SHOWER PACK

Doc M ligature resistant shower pack in blue supplied with: high security dual outlet shower, thermal disinfection valve, TMV3 thermostatic mixing valve and grab rail kit.

Grab rail kit includes:

- 1 x ligature-resistant backrest rail 400 x 150mm (RAL 5011)
- 1 x ligature-resistant white backrest cushion
- 2 x ligature-resistant hinge support rail 760 x 250mm (RAL 5011) 2 x ligature-resistant straight grab rail 35 x 600mm (RAL 5011)
- 1 x shower seat 650mm (RAL 5011)

# DMPXVR13B



# HIGH SECURITY LIGATURE RESISTANT DOC M SHOWER PACK

Doc M ligature resistant shower pack in White supplied with: high security dual outlet shower, thermal disinfection valve, TMV3 thermostatic mixing valve and grab rail kit.

Grab rail kit includes:


- $1\,x$  ligature-resistant backrest rail 400 x 150mm (RAL 5011)  $1\,x$  ligature-resistant white backrest cushion
- 2 x ligature-resistant hinge support rail 760 x 250mm (RAL 5011)
- 2 x ligature-resistant straight grab rail 35 x 600mm (RAL 5011)
- 1 x shower seat 650mm (RAL 5011)

# DMPXVR13W



# Bath filling








## LIGATURE RESISTANT BATH FILLING MODULE

Safe Ensuite bath module; moulded impact resistant construction, vandal and ligature resistant, suitable for mental healthcare, healthcare and custodial applications.

Separate sensors, control and TMV required Dimensions: 210 x 190 x 100mm

Safe ensuite bath filling module






## LIGATURE RESISTANT BATH SPOUT 1/2" BSP

High Security deck mounted Spout. Anti-ligature design. Brushed 316 Stainless Steel finish and DZR Brass BSP connection.

Separate sensors, control and TMV required

AT07-058 Ligature resistant bath spout






# LIGATURE RESISTANT BATH SPOUT 3/4" BSP

High-security deck mounted spout manufactured in 316 stainless steel with a brushed finish. Designed for mental healthcare and high security environments with fully ligature resistant design, conforming to the safer cell standards and testing. Additional

DZR Brass BSP connection Separate sensors, control and TMV required Dimensions: 58 x 25 x 58mm

AT07-059 Ligature resistant bath spout





# **45" LIGATURE RESISTANT BATH SPOUT**

 $45^{\circ}$  High Security Bath Spout. Ligature-resistant design, complete with unrestricted aerator. Anti-rotation pins. Brushed Stainless

Separate sensors, control and TMV required

SH07-043 Ligature resistant bath spout





# Accessible bath pack in stainless steel supplied with: white

enameled steel bath, high-security bath filling backplate with hot and cold tactile sensors, bath control system mains operated, anti-microbial valve, thermal disinfection valve, TMV3 thermostatic mixing valve and red grab rails. Manufactured in accordance with HBN 00-10, Part C Standards.

HIGH SECURITY ASSISTED BATH SETUP - LIGATURE

Bath dimensions: 1700 x 700mm

Grab rails include:

3 x ligature-resistant straight grab rail 35 x 600mm (RAL 3020)





# HIGH SECURITY ASSISTED BATH SETUP - LIGATURE

Accessible bath pack in stainless steel supplied with: white enameled steel bath, high-security bath filling backplate with hot and cold tactile sensors, bath control system mains operated, anti-microbial valve, thermal disinfection valve, TMV3 thermostatic mixing valve and blue grab rails. Manufactured in accordance with HBN 00-10, Part C Standards.

Bath dimensions: 1700 x 700mm

Grab rails include:

3 x ligature-resistant straight grab rail 35 x 600mm (RAL 5011)

DMPX59B







# HIGH SECURITY ASSISTED BATH SETUP - LIGATURE

Accessible bath pack in stainless steel supplied with: white enameled steel bath, high-security bath filling backplate with hot and cold tactile sensors, bath control system mains operated, anti-microbial valve, thermal disinfection valve, TMV3 thermostatic mixing valve and white steel grab rails. Manufactured in accordance with HBN 00-10, Part C Standards.

Bath dimensions: 1700 x 700mm

 $3 \times 10^{-2}$  x ligature-resistant stainless steel straight grab rail  $35 \times 600$  mm

Ligature resistant and high-security Ligature resistant and high-security

# Safe ensuite sensors and controls

Discover the ultimate in washroom safety by configuring your ideal en-suite solution from our range of advanced control options. We have an array of options to choose from, including the state-of-the-art INFORM system, which provides complete remote control, temperature monitoring and usage data. We also offer standard control boxes that are designed to minimise installation costs while still delivering an intuitive and efficient setup.

These control boxes can be easily customised to suit your unique requirements by selecting appropriate sensors from our extensive collection. With our range of options, you can be assured that your washroom puts patient safety at the forefront of your design. Browse through our pages and select the best control box and sensors that fit your needs and preferences.







# NEW FOR 2024


#### 6 CHANNEL WASHROOM CONTROL BOX

External control of 1 room couldn't be easier than with the multichannel control system. The control box has been designed to provide a fully programmable solution tailored to a user's specific needs in all mental healthcare and high security environments. And with the addition of the Key switch, you can isolate the water supply when necessary.

Cost-saving solution, one box controls two ensuites 5 independent outlets & 1 flush valves Control various outlets - basins, taps, showers, baths, and WCs Programmed and maintained via the handheld programmer

Dimensions: 250 x 210 x 91mm

VR07-026 6 channel washroom control box
Complimentary accessory:
AC01-001 Handheld programmer



INFORM Control allows you to understand the behaviour of your water system, remotely implement changes and see the impact in real-time, in comfort from wherever you happen to be.









# NEW FOR 2024 INFORM 6 CHANNEL CONTROL BOX

Following the established VR07-020 Multi-Channel Control box the Inform 6 Channel Control box gives the option of unprecedented levels of control and enhanced user options including: Remote wireless control of valves, temperature monitoring, remote or on site programming, valve counts, valve opening and closing timestamps, timed hygiene purges and identification of infrequently used outlets. All events are monitored, verified and form part of the extensive range of management information available via the Inform platform 24/7. In addition, user friendly, editable alarms can be set to aid compliance

In addition INFORM can provide verification that hot taps are  $\geq$  50 °C (55 °C in healthcare premises) and cold taps are below 20 °C within the times required by HSG274 Part 2.


When used with the CMVL8 there are the additional functions of Thermal purges and TMV cold water isolation checks.

Suitable for use with 12 volts sensors

IC07-006 6 channel control box

To enable all functions an Inform subscription will be required.





# 12 CHANNEL WASHROOM CONTROL BOX

External control of 2 rooms couldn't be easier than with the multichannel control system. The control box has been designed to provide a fully programmable solution tailored to a user's specific needs in all mental healthcare and high security environments. And with the addition of the Key switch, you can isolate the water supply when necessary.


Cost-saving solution, one box controls two ensuites 10 independent outlets & 2 flush valves Control various outlets - basins, taps, showers, baths, and WCs Programmed and maintained via the handheld programmer

Dimensions: 250 x 210 x 91mm

VR07-020 12 channel washroom control box
Complimentary accessory:
AC01-001 Handheld programmer







# NEW FOR 2024

# CMVL8 CONTROL, MONITOR & VERIFY

The CMVL8 is designed to work in conjunction with the Inform enabled Multi Channel control boxes. Complete with full bore 15mm compression isolation valves, check valves, anti-microbial solenoid valves, temperature sensors and a separate thermostatic mixing valve ready for easy installation.

CMVL8 allows you to carry out Thermal purges through both the outlet & TMV and cold water isolation tests without the need to remove IPS panels or manually operate valves. CMVL8 will also provide detailed, reports with date & time, temperatures etc. to ensure you have the information you need to effectively manage the safety of your water system.

In addition INFORM can provide verification that hot taps are  $\geq 50\,$  °C within one minute (55 °C in healthcare premises) and cold taps are below 20 °C within two minutes of running the cold tap as required by HSG274 Part 2

Dimensions: 254 x 200 x 97mm

IC07-008	CMVL8 Control, monitor & verify
Mandatory accesories:	
IC07-006	INFORM 6 channel control box
IC07-017	INFORM programmable sensor

# Safe ensuite sensors and controls





## 12V WC ANTI-VANDAL TACTILE AND WAVE-ON SENSORS

Tactile switch and anti-vandal wave-on sensor manufactured from stainless steel with blue insert. Compatible with a range of KWC DVS products, including; WC flushvalve's, basins and more.

Complete with 15 metre cable Thread diameter: Ø21mm (½" BSP)

AC02-043	Blue WC anti-vandal wave-on sensor
AC02-049	Blue WC Tactile switch
WC01-022	WC flushvalve 1 1/2" (1 required per sensor)
WC01-023	WC flushvalve 2" (1 required per sensor)





## 12V WHB WAVE-ON SENSORS

Wave-on sensors manufactured from stainless steel with a brushed finish and temperature indication insert. Capability to adjust settings (control box required).

Complete with 15 metre cable Thread diameter: Ø21mm / Ø16.7mm

VR00-003	Blue wave-on sensor (cold) for backplates ONLY
VR00-004	Red wave-on sensor (hot) for backplates ONLY
AC02-043	Blue anti-vandal wave-on sensor (wall mount)
AC02-044	Red anti-vandal wave-on sensor (wall mount)
AC17-101	Solenoid valve (1 required per sensor)





# 12V SHOWER TACTILE AND WAVE-ON SENSORS

Wave-on shower sensor manufactured from stainless steel complete with a 45mm bezel.

Complete with 15 metre cable Thread diameter: ½" BSP

SH00-003	Wave-on sensor
AC02-050	Red tactile switch (hot) (wall mount)
AC17-101	Solenoid valve (1 required per sensor





# 12V WHB TACTILE SWITCHES

Tactile switches, manufactured from stainless steel with a brushed finish and temperature indication insert.

Complete with 15 metre cable Thread diameter: Ø21mm (½" BSP)

VR00-007	Blue tactile switch (cold) for backplates ONLY
VR00-008	Red tactile switch (hot) for backplates ONLY
AC02-049	Blue tactile switch (cold) (wall mount)
AC02-050	Red tactile switch (hot) (wall mount)
AC17-101	Solenoid valve (1 required per sensor)





## 12V BATH ANTI-VANDAL TACTILE AND WAVE-ON SENSORS

Anti-vandal wave-on and tactile switches, manufactured from stainless steel with a brushed finish and temperature indication inserts. Suitable for bath filling modules.


Complete with 15 metre cable Thread diameter: Ø21mm (1/2" BSP)


VR00-080	Blue wave-on sensor (cold)
VR00-081	Red wave-on sensor (hot)
VR00-082	Blue tactile switch (cold))
VR00-083	Red tactile switch (hot)
AC17-101	Solenoid valve (1 required per sensor)

# For use with VR01-111 backplate only

Choose a control box, key switch and sensor configuration to suit any requirement.







External control of 2 rooms couldn't be easier than with the multichannel control system. The control box has been designed to provide a fully programmable solution tailored to a user's specific needs in all mental healthcare and high security environments. And with the addition of the Key switch, you can isolate the water supply when necessary.

Cost-saving solution, one box controls two ensuites 10 independent outlets & 2 flush valves Control various outlets - basins, taps, showers, baths, and WCs Programmed and maintained via the handheld programmer

Dimensions: 250 x 210 x 91mm


AC04-016 Water control key switch with 8m cable

# The Ultimate solution for high-security environments

# INFORM Custodial

# Power, Light & Water

INFORM PLW can manage water usage for showers, basins & WCs including delays, run times, recording the number of uses per day, delaying subsequent use and providing lockouts. This is ideal for high security and mental health environments as it will indicate any patterns and behaviours that may cause concern. Water usage can be minimised by combining intelligent and practical limitations of fixture use.

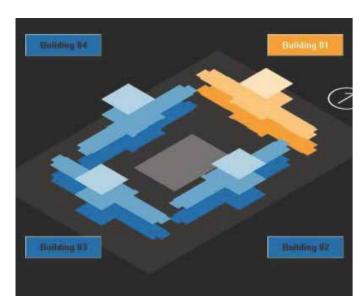


A single control system provides each room with the following features:

- Complete room water fixture control as per INFORM Control
- 230V power sockets limited to 500 watts
- Up to 2 x room bunk lights
- 1 x main room light with internal/ external switches
- 1 x external check (blue) light switch
- RCBO lighting and power circuit protection
- Low-voltage light switch cables
- Allows staff to isolate power circuits if the occupant has radio or TV outside allowable hours or noise levels
- Reduced cabling requirement, especially if the essential and non-essential design is required
- Ability to reduce consumption to essential power supplies during power failure and re-instate when required

Traditionally, multiple rooms are supplied off the same circuit, and any fault affects multiple rooms. Individual or groups of rooms can be controlled using the INFORM Control dashboard, giving staff the ability to:


- Isolate power
- Isolate lights
- Isolate water
- Extend or remove access rights to TV or radio
- Turn lights off at specific times if required
- Provide immediate isolation of outlets remotely
- Change control settings for WCs, WHBs and Showers
- Monitor individual outlet use
- Data log information, if required
- Remote activation of outlet



- P 2 x 230V POWER SOCKETS
- EXTERIOR SWITCH MAIN LIGHT
- SWITCH BLUE LIGHT
- SWITCH BED LIGHT 1
- 4 SWITCH BED LIGHT 2
- INTERIOR SWITCH MAIN LIGH







# NEW FOR 2024

# INFORM CONTROL - POWER, LIGHT & WATER

INFORM Control provides a remote platform to safely manage power, light and water usage. Shower parameters can be monitored & customised including delays, run times and recording the number of uses per day. This is ideal for high security and mental health environments as it will indicate any patterns and behaviours that may cause concern. WCs can be counted per day, along with delaying subsequent use and providing the option of full and half flushing. Basins can also be controlled similarly to WCs, measuring usage per day, delaying subsequent use and providing lockouts. Water use can be minimised by combining intelligent and practical limitations of fixture use and reliable, proven fixture selection.

IC07-001	INFORM Control - Power, Light & Water 1 room
IC07-002	INFORM Control - Power, Light & Water 2 room
Complimentary accessories:	
IC10-066	INFORM Monitor Universal kit

To enable all functions an Inform subscription will be required. Please choose from a range of our tactile switches.

# Ligature resistant DOC M packs with thermal disinfection



## DOC M PACK BTW BLUE - LIGATURE RESISTANT SENSOR OPERATED WITH THERMAL DISINFECTION

Blue Doc M back to wall ligature-resistant pack supplied with: Ligature resistant GRP WC with blue top, GRP accessible WC spacer box, concealed plastic cistern kit, WC flushvalve kit with programmable sensor, Ligature resistant and short projection washbasin with backplate and cold and hot sensors, Anti-microbial two station mains kit, thermal disinfection valve, TMV3 thermostatic

Grab rail kit includes:

- 1 x ligature-resistant hinged support rail 760 x 250mm (RAL 5011)
- 4 x ligature-resistant straight grab rail 35 x 600mm (RAL 5011) 1 x ligature-resistant straight grab rail 35 x 450mm (RAL 5011)
- 1 x ligature-resistant backrest with cushion 35 x 240mm (RAL 5011)

## DMPX30B



# DOC M PACK BTW WHITE - LIGATURE RESISTANT SENSOR OPERATED WITH THERMAL DISINFECTION

White Doc M back to wall ligature-resistant pack supplied with: Ligature resistant GRP WC with blue top, GRP accessible WC spacer box, concealed plastic cistern kit, WC flushvalve kit with programmable sensor, Ligature resistant and short projection washbasin with backplate and cold and hot sensors, Anti-microbial two station mains kit, thermal disinfection valve, TMV3 thermostatic mixing valve.

Grab rail kit includes:

- 1 x ligature-resistant hinged support rail 760 x 250mm
- 4 x ligature-resistant straight grab rail 35 x 600mm
- 1 x ligature-resistant straight grab rail 35 x 450mm
- 1 x ligature-resistant backrest with cushion 35 x 240mm

# DMPX30W



# DOC M PACK BTW RED DEMENTIA CARE - LIGATURE RESISTANT WC & RAILS - MANUAL OPERATION WITH THERMAL PURGE

Red Doc M back to wall pack supplied with: ligature resistant highsecurity GRP WC with red top, spacer box, cistern, tactile flusvalve kit, Variuscare barrier-free single washbasin with red coloured stripe for the visually impaired, slotted waste, bottle trap, F5L-Therm barrier-free thermostatic single-lever pillar mixer tap, hygiene unit for F5L tap, battery compartment, TMV3 thermostatic mixing valve, and grab rail

Ligature resistant grab rail kit includes:

DMPXF5RHR Right hand

- 1 x ligature-resistant hinged support rail 760 x 250mm (RAL 3020)
- 4 x ligature-resistant straight grab rail 35 x 600mm (RAL 3020)
- 1 x ligature-resistant straight grab rail 35 x 450mm (RAL 3020)

1 x ligature-resistant backrest with cushion 35 x 240mm (RAL 3020) DMPXF5LHR Left hand

**NEW** Hygiene unit allows thermal purge override of the manual tap



# Ligature resistant grab rail packs



#### LIGATURE RESISTANT BLUE GRAB RAIL PACK

GRBX803 Grab rail kit includes:	
GRBX141BLR	1 x Ligature resistant straight grab rail 35 x 450mm
GRBX161BLR	4 x Ligature resistant straight grab rail 35 x 600mm
GRBX271BLR	1 x Ligature resistant double arm hinged support rail
760 x 250mm	
GRBX312B	1 x Blue backrest cushion
GRBX321BLR 1 x backres	t rail 400 x 150mm



#### LIGATURE RESISTANT WHITE LR GRAB RAIL PACK

#### GRBX807

Grab rail kit includes:

GRBX141WLR	1 x Ligature resistant straight grab rail 35 x 450mm
GRBX161WLR	4 x Ligature resistant straight grab rail 35 x 600mm
GRBX271WLR	1 x Ligature resistant double arm hinged support rail
	760 x 250mm
GRBX312W	1 x backrest cushion
GRBX321WLR	1 x backrest rail 400 x 150mm




#### LIGATURE RESISTANT RED LR GRAB RAIL PACK

GRBX809	
Grab rail kit includes:	
GRBX141RLR	1 x Ligature resistant straight grab rail 35 x 450mm
GRBX161RLR	4 x Ligature resistant straight grab rail 35 x 600mm
GRBX271RLR	1 x Ligature resistant double arm hinged support rail
760 x 250mm	
GRBX312W	1 x backrest cushion
GRBX321RLR	1 x backrest rail 400 x 150mm



## Ligature resistant accessories




#### LIGATURE RESISTANT SOAP DISH

Safe Ensuite soap dish, manufactured from GRP high performance composite material. Designed and tested to be vandal-proof and avoid ligature points wherever possible. The techniques employed to construct these accessories are used very successfully in the field of ballistic armour manufacturing, this results in unrivalled impact resistance. A high-grade non-porous polyester gel coat surface specially formulated to resist chemicals and ultraviolet rays comes as standard.

Dimensions: 208 x 82 x 100mm

VR01-109 Ligature resistant soap dish




#### LIGATURE RESISTANT SHELF

Safe Ensuite shelf, manufactured from GRP high performance composite material. Designed and tested to be vandal-proof and avoid ligature points wherever possible. The techniques employed to construct these accessories are used very successfully in the field of ballistic armour manufacturing, this results in unrivalled impact resistance. A high-grade non-porous polyester gel coat surface specially formulated to resist chemicals and ultraviolet rays comes as standard.

Dimensions:  $600 \times 96.5 \times 100$ 

VR01-108 Ligature resistant shelf





#### LIGATURE RESISTANT MIRROR

Safe Ensuite mirror with moulded frame, manufactured from GRP high performance composite material. Designed and tested to be vandal-proof and avoid ligature points wherever possible. The techniques employed to construct these accessories are used very successfully in the field of ballistic armour manufacturing, this results in unrivalled impact resistance. A high-grade non-porous polyester gel coat surface specially formulated to resist chemicals and ultraviolet rays comes as standard.

Dimensions: 290 x 390 x 20

VR01-025 Ligature resistant mirror



#### LIGATURE RESISTANT TOILET ROLL HOLDER

Designed specifically for high security environments, this ligature resistant toilet roll holder features smooth edges, robust hygienic materials


and has been tested by SP Technical Research Institute of Sweden.  $\mbox{{\it FEATURES}}:$ 

- Releases vertical load at a maximum of 20kg

- No sharp corners-Hygienic and chemical resistant

VR01-055 Ligature resistant toilet roll holder






#### LIGATURE RESISTANT CORNER SOAP DISH

Safe Ensuite corner soap dish, manufactured from GRP high performance composite material. Designed and tested to be vandal-proof and avoid ligature points wherever possible. The techniques employed to construct these accessories are used very successfully in the field of ballistic armour manufacturing, this results in unrivalled impact resistance. A high-grade non-porous polyester gel coat surface specially formulated to resist chemicals and ultraviolet rays comes as standard.

Pre-drilled steel brackets included Dimensions: 150 x 50 x 150mm

VR01-026 Ligature resistant corner soap dish






#### LIGATURE RESISTANT HOOK

Ligature-resistant hook. Manufactured from. Designed to be wall-mounted and fully ligature-resistant with no sharp corners. The hook has been designed to be durable, not have any loose parts, and is resistant to chemicals. The hook can withstand over 1000 overloads, and will release once the load has reached 20kg.

Dimensions: 20 x 69 x 8mm

VR01-054 Ligature resistant hook





#### LIGATURE RESISTANT MIRROR WITH SHELF

Safe Ensuite mirror with moulded frame and shelf, manufactured from GRP high performance composite material. Designed with Impact resistant frame & mirror glass and tested to be vandal-proof and avoid ligature points wherever possible. The techniques employed to construct these accessories are used very successfully in the field of ballistic armour manufacturing, this results in unrivalled impact resistance. A high-grade non-porous polyester gel coat surface specially formulated to resist chemicals and ultraviolet rays comes as standard.

Dimensions: 300 x 500 x 16/96mm

VR01-037 Ligature resistant mirror with shelf




#### STEEL VENTILATION GRILL HOUSING

VR01-059	Steel Ventilation Grill Housing 150mm x 150mm
VR01-060	Steel Ventilation Grill Housing 200mm x 200mm
VR01-061	Steel Ventilation Grill Housing 250mm x 250mm
VR01-062	Steel Ventilation Grill Housing 300mm x 300mm
VR01-063	Steel Ventilation Grill Housing 350mm x 350mm
VR01-064	Steel Ventilation Grill Housing 400mm x 400mm
VR01-065	Steel Ventilation Grill Housing 450mm x 450mm
VR01-066	Steel Ventilation Grill Housing 500mm x 500mm

Ligature resistant and high-security

## Combination units






#### COMBINATION UNIT WITH RIGHT HAND WC - 500MM BODY

Chromium nickel steel toilet and sink combination unit, satin finish surface, for installing against a wall, with integrated electronic tap components. Invisible fixing with grub screws, lockable inspection opening Mounting stand, material thickness 2mm with elevated rear wall including wall outlet and tactile switch with start/stop function with seamless welded toilet paper roll compartment and seamless moulded wash basin with plastic trap. WC pan, material thickness 1.6mm with full-length skirting, arranged on the right 45 degrees, concealed bowl, tactile switch for WC flushing, flushing certified pursuant to EN 997, horizontal outlet at the back DN 100. With solenoid to connect to premixed hot water or cold water. Condensation water-proof concealed cistern with single flush technology (9 or 6 litres) Supply voltage 24 V DC Including fixing material.

Dimensions: 810 x 1050 x 780mm

AC04-040






#### COMBINATION UNIT WITH LEFT HAND WC - 500MM BODY

Chromium nickel steel toilet and sink combination unit, satin finish surface, for installing against a wall, with integrated electronic tap components. Invisible fixing with grub screws, lockable inspection opening Mounting stand, material thickness 2mm with elevated rear wall including wall outlet and tactile switch with start/stop function with seamless welded toilet paper roll compartment and seamless moulded wash basin with plastic trap. WC pan, material thickness 1.6mm with full-length skirting, arranged on the left 45 degrees, concealed bowl, tactile switch for WC flushing, flushing certified pursuant to EN 997, horizontal outlet at the back DN 100. With solenoid to connect to premixed hot water or cold water. Condensation water-proof concealed cistern with single flush technology (9 or 6 litres) Supply voltage 24 V DC Including fixing material.

Dimensions: 810 x 1050 x 780mm

AC04-041






#### COMBINATION UNIT WITH CENTRE WC - 500MM BODY

Chromium nickel steel toilet and sink combination unit, satin finish surface, for installing against a wall, with integrated electronic tap components. Invisible fixing with grub screws, lockable inspection opening Mounting stand, material thickness 2mm with elevated rear wall including wall outlet and tactile switch with start/stop function with seamless welded toilet paper roll compartment and seamless moulded wash basin with plastic trap. WC pan, material thickness 1.6mm with full-length skirting, arranged in the middle, concealed bowl, tactile switch for WC flushing, flushing certified pursuant to EN 997, horizontal outlet at the back DN 100. With solenoid to connect to premixed hot water or cold water. Condensation waterproof concealed cistern with single flush technology (9 or 6 litres) Supply voltage 24 V DC Including fixing material.

Dimensions:  $500 \times 1050 \times 780 \text{mm}$ 

AC04-042






#### COMBINATION UNIT WITH RIGHT HAND WC - 390MM BODY

Chromium nickel steel toilet and sink combination unit, satin finish surface, for installing against a wall, with integrated electronic tap components. Invisible fixing with grub screws, lockable inspection opening Mounting stand, material thickness 2mm with elevated rear wall including wall outlet and tactile switch with start/stop function with seamless welded toilet paper roll compartment and seamless moulded wash basin with plastic trap. WC pan, material thickness 1.6mm with full-length skirting, arranged on the right 45 degrees, concealed bowl, tactile switch for WC flushing, flushing certified pursuant to EN 997, horizontal outlet at the back DN 100. With solenoid to connect to premixed hot water or cold water. Condensation water-proof concealed cistern with single flush technology (9 or 6 litres) Supply voltage 24 V DC Including fixing material

Dimensions 700 x 1000 x 670mm

AC04-043






#### COMBINATION UNIT WITH LEFT HAND WC - 390MM BODY

Chromium nickel steel toilet and sink combination unit, satin finish surface, for installing against a wall, with integrated electronic tap components. Invisible fixing with grub screws, lockable inspection opening Mounting stand, material thickness 2mm with elevated rear wall including wall outlet and tactile switch with start/stop function with seamless welded toilet paper roll compartment and seamless moulded wash basin with plastic trap. WC pan, material thickness 1.6mm with full-length skirting, arranged on the left 45 degrees, concealed bowl, tactile switch for WC flushing, flushing certified pursuant to EN 997, horizontal outlet at the back DN 100. With solenoid to connect to premixed hot water or cold water. Condensation water-proof concealed cistern with single flush technology (9 or 6 litres) Supply voltage 24 V DC Including fixing material.

Dimensions 700 x 1000 x 670mm

AC04-044





#### COMBINATION UNIT WITH CENTRE WC - 390MM BODY

Chromium nickel steel toilet and sink combination unit, satin finish surface, for installing against a wall, with integrated electronic tap components. Invisible fixing with grub screws, lockable inspection opening Mounting stand, material thickness 2mm with elevated rear wall including wall outlet and tactile switch with start/stop function with seamless welded toilet paper roll compartment and seamless moulded wash basin with plastic trap. WC pan, material thickness 1.6mm with full-length skirting, arranged in the middle, concealed bowl, tactile switch for WC flushing, flushing certified pursuant to EN 997, horizontal outlet at the back DN 100. With solenoid to connect to premixed hot water or cold water. Condensation water-proof concealed cistern with single flush technology (9 or 6 litres) Supply voltage 24 V DC Including fixing material.


Dimensions  $390 \times 1000 \times 780 \text{mm}$ 

AC04-045

Ligature resistant and high-security

## High-security accessories






#### HEAVY DUTY WALL MOUNTED SOAP DISPENSER

Manufactured from 2mm thick grade 1.4301 (304) stainless steel with a satin polish finish. The casing is held in place by a stainless steel rod fixed to the mounting plate and a security lock. Suitable for liquid soaps and lotions with push button operation and 1 litre tank accessed using the cylinder lock. Fixings included.

Heavy duty liquid soap dispenser Capacity: 1 litre liquid soap tank Mounting: Wall mounted Manual operation Dimensions: 128 x 127 x 320mm

SD300	Wall mounted soap dispens
SO10L	Liquid soap. 10 litres






#### HEAVY DUTY WALL MOUNTED PAPER TOWEL DISPENSER

Manufactured from 2mm thick grade 1.4301 (304) stainless steel with a satin polish finish. The casing is held in place by a stainless steel rod fixed to the mounting plate and a security lock. Suitable for z fold paper with a loading capacity of 400 - 600 pcs of paper. Fixings included.

Paper towel dispenser Capacity: 400 - 600 paper towels Mounting: Wall mounted Manual operation Dimensions: 258 x 127 x 352mm

TD350 Wall mounted paper towel dispenser






## HEAVY DUTY INSET LIGATURE RESISTANT TOILET ROLL HOLDER

Toilet paper roll compartment for installation in walls, stainless steel, material thickness 2,0 mm, visible surface satin finished. Round insert compartment for one WC paper roll. Mounting from front. With 4 mounting holes, fixing material included.

Dimensions  $180 \times 180 \times 105 \text{ mm}$  (W x H x D)

HDTX673E Inset ligature resistant toilet roll holder






#### HEAVY DUTY WALL MOUNTED TOILET ROLL HOLDER

Manufactured from 2mm thick grade 1.4301 (304) stainless steel with a satin polish finish. The casing is held in place by a stainless steel rod fixed to the mounting plate and a security lock. The unit has a tear-off edge, with viewing window for reserve rolls, and comes without spindles. Suitable for rolls with a maximum width of 120mm and maximum diameter 115mm. Fixings included.

Heavy duty toilet roll holder Capacity: 3 rolls max. dia. 115mm Mounting: Wall mounted Dimensions: 150 x 415 x 130mm

HDTX674 Wall mounted toilet roll holder






#### HEAVY DUTY WALL MOUNTED JUMBO TOILET ROLL HOLDER

Manufactured from 2mm thick grade 1.4301 (304) stainless steel with a satin polish finish. The casing is held in place by a stainless steel rod fixed to the mounting plate and a security lock. Suitable for rolls with a maximum diameter of 300mm the square outer case has an inspection window to the front, and an integrated stainless steel tear-off edges. Fixings are included.

Heavy duty jumbo toilet roll holder Capacity: Roll max. dia. 300mm Mounting: Wall mounted Dimensions: 320 x 130 x 320mm

RH320 Wall mounted jumbo toilet roll holder





#### HEAVY DUTY SECURITY COAT HOOK

Manufactured from 2mm thick grade 1.4301 (304) stainless steel with a satin polish finish. The security hook has a 30mm projection from the back plate and tilts downwards when overloaded.

Security wall hook


Dimensions: 108 x 108 x 52mm

HDTX692 Wall mounted from the front

HDTX693 Wall mounted from behind with threaded bolts

Ligature resistant and high-security

# High-security accessories




#### **HEAVY DUTY WALL SHELF**

Manufactured from 2mm thick grade 1.4301 (304) stainless steel with a satin polish finish. The shelf features rounded corners, upturned front edge and fixing holes. Vandal resistant screws are not included.

Heavy duty wall shelf Mounting: Wall mounted Dimensions: 300 x 80 x 30mm

#### AL300HE




#### **HEAVY DUTY WALL SHELF**

Manufactured from 2mm thick grade 1.4301 (304) stainless steel with a satin polish finish. The shelf features rounded corners, upturned edges and fixing holes on the rear panel. Fixings included.

Heavy duty wall shelf Mounting: Wall mounted Dimensions: 83 x 60 x 213mm

#### HDTY64



#### HEAVY DUTY STAINLESS STEEL WALL MOUNTED MIRROR

Manufactured from 1mm thick grade 1.4301 (304) stainless steel with a reflective polished surface. The mirror comes with a reinforced polystyrene plate to the rear and hidden thief resistant fixings. Fixings included.


Mounting: Wall mounted

M500HD	8 x 490 x 390mm	
M600HD	8 x 490 x 590mm	





## Mini Catering Sinks



#### SISSONS MINI CATERING SINKS - SINGLE BOWL

Mini sinks are manufactured from 1.2mm thick austenitic grade stainless steel polished to a satin finish. Single bowl sinks are all suppled with 38mm waste, plug, chain and overflow. Single bowl sinks have two holes drilled at 180mm centre suitable for either `1mm pillar taps or mixer taps. An earthing lug is fitted under the drainer. Stainless steel under frames complete with shelf are supplied in a flat pack form.


L OR R after the code refers to the handing of the drainer.

External: 1000x600mm Bowl: 400x400x250mm

Single Drainer

E20601L/R	Single Bowl and drainer
Complimento	ary accessories:
K20670N	Stand & shelf for E20601L/R
F1081N	13mm crosshead high neck pillar taps OR
F1083N	13mm fluted





#### SISSONS MINI CATERING SINKS - SINGLE BOWL

Mini sinks are manufactured from 1.2mm thick austenitic grade stainless steel polished to a satin finish. Single bowl sinks are all suppled with 38mm waste, plug, chain and overflow. Single bowl sinks have two holes drilled at 180mm centre suitable for either `1mm pillar taps or mixer taps. An earthing lug is fitted under the drainer. Stainless steel under frames complete with shelf are supplied in a flat pack form


L OR R after the code refers to the handing of the drainer.

External: 1200x600mm Bowl: 500x400x250mm

Single Drainer

E20602L/R	Single Bowl and drainer
Compliment	ary accessories:
K20671N	Stand & shelf for E20602L/R & E20603L/R
F1081N	13mm crosshead high neck pillar taps OR
F1083N	13mm fluted





#### SISSONS MINI CATERING SINKS - SINGLE BOWL

Mini sinks are manufactured from 1.2mm thick austenitic grade stainless steel polished to a satin finish. Single bowl sinks are all suppled with 38mm waste, plug, chain and overflow. Single bowl sinks have two holes drilled at 180mm centre suitable for either `1mm pillar taps or mixer taps. An earthing lug is fitted under the drainer. Stainless steel under frames complete with shelf are supplied in a flat pack form.


L OR R after the code refers to the handing of the drainer.

External: 1200x600mm Bowl: 500x400x300mm

Single Drainer

g	
E20603L/R	Single Bowl and drainer
Compliment	ary accessories:
K20671N	Stand & shelf for E20602L/R & E20603L/R
F1081N	13mm crosshead high neck pillar taps OR
F1083N	13mm fluted





#### SISSONS MINI CATERING SINKS - DOUBLE DRAINER

Mini sinks are manufactured from 1.2mm thick austenitic grade stainless steel polished to a satin finish. Single bowl sinks are all suppled with 38mm waste, plug, chain and overflow. Single bowl sinks have two holes drilled at 180mm centre suitable for either `1mm pillar taps or mixer taps. An earthing lug is fitted under the drainer. Stainless steel under frames complete with shelf are supplied in a flat pack form.


L OR R after the code refers to the handing of the drainer.

External: 1500X600mm Bowl: 500x400x300mm

Double Drainer

E20604N	Double drainer		
Compliment	Complimentary accessories:		
K20672N	Stand & shelf for E20604N		
F1081N	13mm crosshead high neck pillar taps OR		
F1083N	13mm fluted		





#### SISSONS MINI CATERING SINKS 600MM WIDE - DOUBLE BOWL

Mini sinks are manufactured from 1.2mm thick austenitic grade stainless steel polished to a satin finish. The larger bowl is fitted with a 38mm waste, plug, chain and overflow and the smaller outer bowl supplied with a 38mm basket strainer waste outlet. They are both drilled for mixer taps only.

An earthing lug is fitted under the drainer. Stainless steel underframes complete with shelf are supplied in a flat pack form. Each leg is fitted with an adjustable foot with a working height of 900mm.


External:1500x600mm

Bowl: 500x400x250mm and 400x400x250mm

Single Drainer

E20605L/R	
Complimentary accessories:	
K20672N	Stand & Shelf
F1026N	13mm deck pattern mixer tap





#### SISSONS MINI CATERING SINKS 600MM WIDE - DOUBLE BOWL

Mini sinks are manufactured from 1.2mm thick austenitic grade stainless steel polished to a satin finish. The larger bowl is fitted with a 38mm waste, plug, chain and overflow and the smaller outer bowl supplied with a 38mm basket strainer waste outlet. They are both drilled for mixer taps only.

An earthing lug is fitted under the drainer. Stainless steel underframes complete with shelf are supplied in a flat pack form. Each leg is fitted with an adjustable foot with a working height of 900mm.

External:1500x600mm


Bowl: 500x400x300mm and 400x400x250mm

Single Drainer

E20606L/R		
Complimentary accessories:		
K20672N	Stand & Shelf	
F1026N	13mm deck pattern mixer tap	

## Catering





#### SISSONS MIDI CATERING SINK 750MM X 650MM


Manufactured from 1.2mm thick, grade 1.4301 (304) stainless steel, with a satin finish. Designed with an earthing lug fitted under the drainer. Stainless steel underframes and shelf (sold separately) are supplied in a flat pack form with easy to read assembly instructions. Each leg is fitted with an adjustable foot (-20, +10mm) with a working height of 900mm. The sink is supplied with 38mm waste and standpipe strainer overflow.

No drainer

Tap holes: 2 at 180mm centres Bowl dimensions: 600 x 450 x 300mm Dimensions: 750 x 900 x 650mm

E20608NP	Complete with underframe	
Complimentary accessories:		
F1081N	13mm crosshead pillar taps	
F1083N	13mm fluted handle pillar taps	
F1026N	13mm deck pattern mixer tap	





## SISSONS MIDI CATERING SINK 1200MM X 650MM WITH LEFT HAND DRAINER


Manufactured from 1.2mm thick, grade 1.4301 (304) stainless steel, with a satin finish. Designed with an earthing lug fitted under the drainer. Stainless steel underframes and shelf (sold separately) are supplied in a flat pack form with easy to read assembly instructions. Each leg is fitted with an adjustable foot (-20, +10mm) with a working height of 900mm. The sink is supplied with 38mm waste and standpipe strainer overflow.

Drainer: Left hand drainer Tap holes: 2 at 180mm centres Bowl dimensions: 600 x 450 x 300mm Dimensions: 1200 x 900 x 650mm

**E20610LP** Complete with underframe

**E20610LTP** Complete with stand pack and F1083N taps





## SISSONS MIDI CATERING SINK 1200MM X 650MM WITH RIGHT HAND DRAINER


Manufactured from 1.2mm thick, grade 1.4301 (304) stainless steel, with a satin finish. Designed with an earthing lug fitted under the drainer. Stainless steel underframes and shelf (sold separately) are supplied in a flat pack form with easy to read assembly instructions. Each leg is fitted with an adjustable foot (-20, +10mm) with a working height of 900mm. The sink is supplied with 38mm waste and standpipe strainer overflow.

Drainer: Right hand drainer Tap holes: 2 at 180mm centres Bowl dimensions: 600 x 450 x 300mm Dimensions: 1200 x 900 x 650mm

E20610RP Complete with underframe

E20610RTP Complete with stand pack and F1083N taps






## SISSONS MIDI CATERING SINK 1500MM X 650MM WITH LEFT HAND DRAINER

Manufactured from 1.2mm thick, grade 1.4301 (304) stainless steel, with a satin finish. Designed with an earthing lug fitted under the drainer. Stainless steel underframes and shelf (sold separately) are supplied in a flat pack form with easy to read assembly instructions. Each leg is fitted with an adjustable foot (-20, +10mm) with a working height of 900mm. The sink is supplied with 38mm waste and standpipe strainer overflow.

Drainer: Left hand drainer Tap holes: 2 at 180mm centres Bowl dimensions: 600 x 450 x 300mm Dimensions: 1500 x 900 x 650mm

E20612LP Complete with underframe
E20612LTP Complete with stand pack and F1083N taps





## SISSONS MIDI CATERING SINK 1500MM X 650MM WITH RIGHT HAND DRAINER


Manufactured from 1.2mm thick, grade 1.4301 (304) stainless steel, with a satin finish. Designed with an earthing lug fitted under the drainer. Stainless steel underframes and shelf (sold separately) are supplied in a flat pack form with easy to read assembly instructions. Each leg is fitted with an adjustable foot (-20, +10mm) with a working height of 900mm. The sink is supplied with 38mm waste and standpipe strainer overflow.

Drainer: Right hand drainer Tap holes: 2 at 180mm centres Bowl dimensions: 600 x 450 x 300mm Dimensions: 1500 x 900 x 650mm

**E20612RP** Complete with underframe

**E20612RTP** Complete with stand pack and F1083N taps





## SISSONS MIDI CATERING SINK 1800MM X 650MM WITH SINGLE BOWL AND DOUBLE DRAINER


Manufactured from 1.2mm thick, grade 1.4301 (304) stainless steel, with a satin finish. Designed with an earthing lug fitted under the drainer. Stainless steel underframes and shelf (sold separately) are supplied in a flat pack form with easy to read assembly instructions. Each leg is fitted with an adjustable foot (-20, +10mm) with a working height of 900mm. The sink is supplied with 38mm waste and standpipe strainer overflow.

Drainer: Double drainer Tap holes: 2 at 180mm centres Bowl dimensions: 600 x 450 x 300mm Dimensions: 1800 x 900 x 650mm

**E20614DP** Complete with underframe

**E20614DTP** Complete with stand pack and F1083N taps

## Catering




## SISSONS MIDI CATERING SINK 1800MM X 650MM WITH LEFT HAND DRAINER

Manufactured from 1.2mm thick, grade 1.4301 (304) stainless steel, with a satin finish. Designed with an earthing lug fitted under the drainer. Stainless steel underframes and shelf are supplied in a flat pack form with easy to read assembly instructions. Each leg is fitted with an adjustable foot (-20, +10mm) with a working height of 900mm. The sink is supplied with 38mm waste and standpipe strainer overflow.

Drainer: Left hand drainer Bowl dimensions: 600 x 450 x 300mm Dimensions: 1800 x 650mm

E20616LP Complete with underframe
E20616LTP Complete with stand pack and F1083N taps



## SISSONS MIDI CATERING SINK 1800MM X 650MM WITH RIGHT HAND DRAINER

Manufactured from 1.2mm thick, grade 1.4301 (304) stainless steel, with a satin finish. Designed with an earthing lug fitted under the drainer. Stainless steel underframes and shelf are supplied in a flat pack form with easy to read assembly instructions. Each leg is fitted with an adjustable foot (-20, +10mm) with a working height of 900mm. The sink is supplied with 38mm waste and standpipe strainer overflow.


Drainer: Right hand drainer Bowl dimensions: 600 x 450 x 300mm

Dimensions: 1800 x 650mm

**E20616RP** Complete with underframe

**E20616RTP** Complete with stand pack and F1083N taps





## SISSONS MIDI CATERING SINK 2400MM X 650MM WITH DOUBLE DRAINER

Manufactured from 1.2mm thick, grade 1.4301 (304) stainless steel, with a satin finish. Designed with an earthing lug fitted under the drainer. Stainless steel underframes and shelf (sold separately) are supplied in a flat pack form with easy to read assembly instructions. Each leg is fitted with an adjustable foot (-20, +10mm) with a working height of 900mm. The sink is supplied with 38mm waste and standpipe strainer overflow.

Drainer: Double drainer Bowl dimensions: 600 x 450 x 300mm Dimensions: 2400 x 650mm

E20618DP Complete with underframe
E20618DTP Complete with stand pack and F1083N taps






#### OPTIMA ADRIATIC HIGH NECK LEVER TAPS

Mounting: Deck mounted Spout projection: 93mm

F1330N






#### CROSSHEAD PILLAR TAPS

For connecting to hot and cold water. The 13mm basin taps are manufactured from chromium plated brass. Ideal for smaller sinks.

Mounting: Deck mounted Spout projection: 75mm

F1081N





#### **DECK PATTERN MIXER OVERHEAD SPRAY**


For connecting to hot and cold water. The pre-rinse overhead sprays are suitable for those locations where there is a need for a thorough rinsing of utensils and crockery in dish-washing areas. The deck pattern mixer overhead spray is designed for tap hole centres of 180mm. Supplied complete with spray valve and 150mm wall bracket. Suitable for temperatures up to 54°C. Manufactured from chromium plated brass.

Mounting: Deck mounted Spout projection: 381mm

F1062

## Gastro catering taps






#### **GASTRO TWO-HANDLE MIXER - COMMERCIAL KITCHEN**

This particular faucet model is a two-handle mixer that comes equipped with KWC CORONA metal handles which can be removed if needed. The faucet also features a swivel spout that can rotate 360 degrees, and comes with an adjustable gland and jet regulator. The OptimalSpace design of this faucet provides ample space for washing dishes or performing other kitchen-related tasks. The flat valves of this faucet measure M20 x 1.25 and feature a stainless steel valve seat, while the copper tubes measure ø15 mm. This faucet can be easily fastened using a threaded sleeve that measures 1 ¼", and requires a mounting hole size of ø42 mm.

100945

Gastro two-handle mixer






#### **GASTRO LEVER MIXER - COMMERICAL KITCHEN**

This product is a lever mixer with a swivel spout that can rotate 360°. It comes with an adjustable gland and a jet regulator. The design provides ample space for washing or working, which is called OptimalSpace. The mixer features a KWC cartridge XL 46 with high capacity and ceramic discs. The flow rate and temperature can be continuously adjusted and there is also a temperature limitation feature. The copper tubes have a diameter of 15mm and it is fastened using a threaded sleeve of size 1 ¼". The mounting hole size is 42mm.

121267

Gastro lever mixer






#### **GASTRO TWO-HANDLE MIXER - COMMERCIAL KITCHEN**

This particular faucet features a convenient two-handle mixer design with metal handles that are removable for easy cleaning. The spout is capable of swiveling 360 degrees and comes with an adjustable gland as well as a Jet regulator to control water flow. With ample space for washing or working, the OptimalSpace feature ensures you have plenty of room to maneuver. The flat valves are made with durable stainless steel valve seats, and the pillar connections are sized at ¾" x ¾" L 45 for secure installation. The mounting hole size is a standard ø28 mm.

118411

Gastro two-handle mixer






#### **GASTRO LEVER MIXER - COMMERICAL KITCHEN**

This is a lever mixer with a swivel spout that rotates 360 degrees. It has an adjustable gland and a jet regulator. It has ample space for washing or working, thanks to OptimalSpace. It uses KWC cartridge XL 46 which has ceramic discs and allows for continuous variation of flow rate and temperature. Copper tubes of ø15 mm are used and it can be fastened using a threaded sleeve of  $1\,\%$ ". It requires a mounting hole of ø42 mm.

121290

Gastro lever mixer






#### GASTRO TWO-HANDLE MIXER - COMMERCIAL KITCHEN

This is a description of a two-handle mixer with KWC CORONA metal handles that are removable. The mixer has a swivel spout with an adjustable gland and a jet regulator. It also features OptimalSpace, which provides ample space for washing or working. The flat valves are M20 x 1.25 and the stainless steel valve seat ensures durability. Additionally, the wall connections are ¾" x ¾" and there is no shut-off valve, with a total length of 160.

118404

Gastro two-handle mixer






#### GASTRO LEVER MIXER - COMMERICAL KITCHEN

This lever mixer boasts a swivel spout that effortlessly rotates 360 degrees, coupled with an adjustable gland and a jet regulator. With OptimalSpace, there's ample room for washing or working. Its KWC cartridge XL 46 features ceramic discs for a high-capacity and continuous variation of flow rate and temperature, with temperature limitation. Copper tubes of ø15 mm are used and it can be fastened securely using a threaded sleeve of  $1\,\%$ ". It requires a mounting hole of ø42 mm.

121299

Gastro lever mixer






#### **GASTRO TWO-HANDLE MIXER - COMMERCIAL KITCHEN**

This product is a two-handle mixer with a 300mm pillar. It features KWC CORONA metal handles that can be removed, automatic outlet draining, and a preassembled socket. The swivel spout can rotate 360° and has an adjustable gland and jet regulator. The product also has OptimalSpace, which provides ample space for washing or working. The flat valves are M20 x 1.25 and have a stainless steel valve seat. Additionally, the copper tubes are ø15 mm and the mounting hole size is ø62 mm.

100931

Gastro two-handle mixer





#### GASTRO LEVER MIXER - COMMERICAL KITCHEN


Introducing the Lever Mixer with Swivel Spout that rotates 360° and comes with an adjustable gland and Jet Regulator. It also offers OptimalSpace, which means ample space for washing or working. The mixer uses KWC Cartridge XL 46 that has high capacity, ceramic discs, and allows for continuous flow rate and temperature adjustment. The temperature is also limited for safety purposes. The Pillar Connections are ¾" x ¾" L 195, and the mounting hole size is ø30 mm.

121301

Gastro lever mixer

## Gastro catering taps






#### **GASTRO TWO-HANDLE MIXER - COMMERCIAL KITCHEN**

This is a two-handle mixer faucet with a suspension spring. It comes with KWC CORONA metal handles, TouchProtect anti-scald technology, and is intrinsically safe against backflow. The faucet has a pre-rinse spray with a delayed closing device and valve maintenance unit. It also has SprayClean, SprayLock, and PowerClean features. The faucet is designed to provide ample space for washing or working, has flat valves M20 x 1.25, stainless steel valve seat, and copper tubes ø10 mm. It can be mounted using the threaded sleeve M33 x 1.5 and requires a mounting hole size ø35 mm.

100962

Gastro two-handle mixer






#### **GASTRO TWO-HANDLE MIXER - COMMERCIAL KITCHEN**

This is a two-handle mixer with a suspension spring that comes with KWC CORONA metal handles. It has TouchProtect to prevent scalding, is intrinsically safe against backflow, and has a 180° swivel spout. The pre-rinse spray minimizes water hammer, and SprayClean prevents limescale buildup. SprayLock allows you to lock the spray in place, while PowerClean provides more focused cleaning power. The product has OptimalSpace, flat valves made from stainless steel, ½" x ¾" L 130 pillar connections, and a ø22 mm mounting hole size.

122254

Gastro two-handle mixer






#### GASTRO TWO-HANDLE MIXER - COMMERCIAL KITCHEN

The faucet has a vertical shut-off valve and suspension spring for easy operation and stability. The KWC CORONA metal handle is removable (cold water). TouchProtect and pre-rinse spray ensure safety, while SprayClean prevents limescale buildup. SprayLock and PowerClean make cleaning easy. The OptimalSpace design provides ample washing space. The faucet has flat valves M20 x 1.25, a stainless steel valve seat, ½" connecting thread, and ø22 mm mounting hole.

100960

Gastro two-handle mixer






#### GASTRO LEVER MIXER - COMMERICAL KITCHEN

This text describes a lever mixer with a suspension spring that features touchProtect anti-scald protection and is intrinsically safe against backflow. The mixer also includes a pre-rinse spray with a delayed closing device to minimize water hammer, a valve maintenance unit, SprayClean technology, SprayLock, PowerClean, and OptimalSpace. The mixer is equipped with a KWC cartridge XL 46, copper tubes ø15 mm, and requires a threaded sleeve 1 ½" for fastening. The mounting hole size is ø42 mm.

121273

Gastro lever mixer





#### **GASTRO LEVER MIXER - COMMERICAL KITCHEN**


The faucet has a lever mixer, suspension spring, and TouchProtect anti-scald protection. It's intrinsically safe against backflow and has a swivel spout that rotates up to 160 degrees. The pre-rinse spray minimizes water hammer and there's a valve maintenance unit for cleaning. The OptimalSpace design provides ample space for washing or working. The KWC cartridge XL 46 ensures a high capacity with ceramic discs for a smooth and continuous water flow.


121284

Gastro lever mixer









#### GASTRO LEVER MIXER - COMMERICAL KITCHEN

The product is safe and prevents backflow. It has a swivel spout with adjustable gland, jet regulator, and pre-rinse spray with delayed closing device to reduce water hammer. It's easy to clean with SprayClean and has a lockable jet spray, SprayLock. Power-Clean is a needle spray mode for better cleaning. It provides ample space for washing or working and has a high-capacity KWC cartridge XL 46 and ceramic discs. Temperature and flow rate are variable, and it mounts with pillar connections ½" x ¾" L 130 and ø22 mm hole.

121294

Gastro lever mixer

#### **GASTRO LEVER MIXER - COMMERICAL KITCHEN**

Introducing the Lever Mixer with Swivel Spout that rotates 360° and comes with an adjustable gland and Jet Regulator. It also offers OptimalSpace, which means ample space for washing or working. The mixer uses KWC Cartridge XL 46 that has high capacity, ceramic discs, and allows for continuous flow rate and temperature adjustment. The temperature is also limited for safety purposes. The Pillar Connections are  $\frac{3}{4}$ " x  $\frac{3}{4}$ " L 195, and the mounting hole size is  $\infty$ 30 mm.

121296 Gastro lever mixer 121297 Gastro lever mixer

Caterina Caterina

## Gastro E Stainless-steel catering taps

## Always a class ahead

**KWC** GASTRO E - the stainless-steel solution for the catering industry In professional kitchens. the KWC GASTRO line is in a class of its own. The KWC GASTRO is now available in pure stainless steel. It is, therefore, even more, durable and ensures a virtually unprecedented hygiene level. Stainless steel is also the perfect fit for a professional kitchen. The KWC GASTRO line features a comprehensive range of products. with elements that can be combined and expanded upon in line with individual requirements. Highlights include the extremely robust pre-rinse spray.



LEVER MIXER
SWIVEL SPOUT, A300

24.561.044.700FL stainless



LEVER MIXER SWIVEL SPOUT, A 450

24.561.046.700FL stainless



LEVER MIXER PRE-RINSE SPRAY, A200, WITH SPOUT

24.561.144.700FL, stainless



LEVER MIXER PRE-RINSE SPRAY, A300, WITH SPOUT

24.561.146.700FL, stainless



**EXTENSION SOCKET 100MM** 

Z.539.000.700, stainless steel



**EXTENSION SOCKET 300MM** 

Z.539.001.700 stainless steel



PRE-RINSE SPRAY, SWIVELLING

Z.539.030.145, graphite grey



#### High-quality materials

Stainless steel is easy to clean and does not provide a breeding ground for bacteria. Stainless steel's sustainability is down to its long-lasting nature and complete recyclability. It also leaches less heavy metal than other materials.

### High flow rate

Thanks to the high-performance cartridge, the KWC GASTRO E stands out with its extraordinarily high flow rate. The 360-degree swivel range is the ultimate addition to the user-friendly design.

#### Optimal space utilisation

The two different base lengths mean that the tap height can be adjusted in line with individual requirements. The flexible connection hoses make installation quick and easy.

#### Simple maintenance

The lockable pre-rinse spray features delayed closing for pressure shock damping, and a valve-maintenance unit for cleaning. This ensures that the tap can be reliably maintained, which in turn helps increase its service life.



## Bistro E Catering taps

## The best of both worlds

**KWC** BISTRO E - professional quality for small professional operations and exclusive kitchens in stainless steel

With the KWC BISTRO E, functionality and effectiveness are paramount. The pre-rinse spray model has a stainless-steel spray head with two types of streams and ergonomic grips. The KWC BISTRO E also does well in consumption and helps save both water and energy. The entire line is characterised by professional efficiency and technology. Combined with a high cleaning performance and ease of use, it meets even the most demanding requirements.

#### Stainless steel far optimal sustainability

High-quality stainless steel is robust and easy to clean. It guarantees the taps' longevity, a high hygiene level and less heavy metal leaching than other materials. It therefore proves its reliability over the long term.

#### Efficient technology

The pre-rinse spray with two types of streams helps to save water while providing an improved cleaning performance. The centred cleaning stream is perfect

for gentle washing.

#### Versatile application options

The slimline design is simple, elegant and space-saving. The KWC BISTRO E is therefore suitable for both smaller professional kitchens and private homes.

#### **Enjoyable operation**

The patented HighFlex technology and the stainless teel support spring extend the radius of motion around the sink for convenience at all times.



LEVER MIXER SWIVEL SPOUT, A250

10.581.013.700FL, stainless steel



LEVER MIXER HIGH FLEX, A235

10.581.433.700FL, stainless steel




LEVER MIXER PRE-RINSE SPRAY, A295 WITH SPOUT

10.581.144.700FL, stainless steel

# F5 Intelligent kitchen taps






#### F5LME HYBRID KITCHEN TAP

F5LME hybrid kitchen fitting DN 15 as pillar mixer with swivelling spout, can be locked in the centre position. Adjustable swivel ranges of 50°, 120° and 360°. For connection to hot water and cold water via hoses with strainers. Single lever mixer with mixer cartridge with ceramic disc technology and adjustable, turn-proof temperature stop. Alternative activation using hand reflection via an opto-electronic sensor for time-controlled water release with preset mixing water temperature. Mixer cartridge, solenoid valve and sensor with control electronics in all-metal housing, brushed stainless steel.

Laminar jet controller with integrated flow rate controller (8.0 l/min). Projection 220mm. Activated water hygiene flushing 24 hours after last activation, safety switch-off for continuous reflection and saving of statistical data. If you require additional functionality, such as sensor range adjustment and tap run time, a bi-directional remote is available as an extra. Battery compartment including battery or power supply unit with extension cable must be ordered separately.

F5LME001	F5LME tap
Mandatory ac	cessories;
ACEX9023	Battery compartment
Complimentar	ry accessories;
SD01-003	Pillar automatic soap dispenser





#### F5LME HYBRID KITCHEN TAP FOR HOT WATER HEATER

F5LME hybrid kitchen fitting DN 15 as pillar mixer with swivelling spout, can be locked in the centre position. Adjustable swivel ranges of 50°, 120° and 360°. To the connection via hoses in open undercounter boilers. Single lever mixer with mixer cartridge with ceramic disc technology and adjustable, turn-proof temperature stop. Alternative activation using hand reflection via an optoelectronic sensor for time-controlled water release with preset mixing water temperature. Mixer cartridge, solenoid valve and sensor with control electronics in all-metal housing, brushed stainless steel. With beam shaper. Projection 220mm. Activated water hygiene flushing 24 hours after last activation, safety switch-off for continuous reflection and saving of statistical data. If you require additional functionality, such as sensor range adjustment and tap run time, a bi-directional remote is available as an extra. Battery compartment including battery or power supply unit with extension cable must be ordered separately.

Water heater not included.

F5LME002	F5LME tap
Mandatory ac	cessories;
ACEX9023	Battery compartment
Complimenta	ry accessories;
SD01-003	Pillar automatic soap dispenser




## KWC F5 – the new hybrid kitchen tap

The efficient use of water and energy helps optimise operating costs in office and administration buildings. Electronic taps are now standard in the washrooms of these buildings. At the same time, they help ensure drinking water hygiene. Most tea and coffee kitchens in offices, however, still have conventional, lever-operated kitchen taps. The new F5 hybrid kitchen tap from KWC Professional combines the advantages of an electronic tap with the ease of use of a lever mixer.



## Drinking fountains and bottle fillers





#### SISSONS BOTTLE FILLER 700MM

Bottle filler 700mm

Junior height (700mm) floor mounted pedestal drinking fountain manufactured from stainless steel with a brushed finish. Designed with self closing valve with protected nozzle to minimise direct contact, complete with bottle filler.

Tamper resistant pedestal Adult height 700mm Supplied with bottle Filler


ANMX70

BUILD YOUR OWN

BUILD

BUILD YOUR OWN






#### ANIMA WALL MOUNTED DRINKING FOUNTAIN

ANIMA wall-mounted drinking fountain, stainless steel, satin finished surface, material thickness 1.2mm, seamlessly integrated flat bowl without overflow, rectangular drinking fountain shape with rounded edges, two tap holes including cover, strainer waste G 1 1/4 B, including mounting material.

Dimensions 310 x 200 x 260mm Bowl dimensions 256 x 20 x 210mm Drinking fountain tap and/or bottle filler tap sold separately

ANMX30U	Drinking fountain
ANMX-S1	ANIMA pedestal
ANMX-BU	Self-closing drinking bubbler
ANMX-BT	Bottle filler tap
F6001	Tap hole stopper





#### SISSONS BOTTLE FILLER 900MM


Adult height (900mm) floor mounted pedestal drinking fountain manufactured from stainless steel with a brushed finish. Designed with self closing valve with protected nozzle to minimise direct contact, complete with bottle filler.

Tamper resistant pedestal Adult height 900mm Supplied with bottle Filler

Bottle filler 900mm

246






#### ANIMA WALL MOUNTED DRINKING FOUNTAIN

ANIMA wall-mounted drinking fountain, stainless steel, satin finished surface, material thickness 1.2mm, seamlessly integrated flat bowl without overflow, rectangular drinking fountain shape with rounded edges, two tap holes including cover, circumferential apron with material thickness 1mm, strainer waste G 1 1/4 B, including mounting material.

Dimensions 310 x 135 x 264mm Bowl dimensions 256 x 20 x 210mm Drinking fountain tap and/or bottle filler tap sold separately

ANMX21ES	Drinking fountain
ANMX-S3	ANIMA pedestal
ANMX-BU	Self-closing drinking bubbler
ANMX-BT	Bottle filler tap
F6001	Tap hole stopper






#### SISSONS WALL MOUNTED BOTTLE FILLER

Wall mounted drinking fountain manufactured from stainless steel with a brushed finish. Supplied complete with bottle filler.

Drinking fountain, wall mounted Bottle filler

ANMX100 Bottle filler wall mounted





#### ANIMA WALL-MOUNTED DRINKING FOUNTAIN

Wall-mounted drinking fountain made of MIRANIT resin-bondedmineral material with pore-free smooth surface (temperature-resistant up to 80 °C), Alpine white colour. With seamlessly mouldedround bowl, without overflow, with tap hole 18 mm (D) on the right. Mounted via back panel. Circumference of apron 110 mm (H). Withstrainer waste G 1 1/4 B, siphon G 1 1/4 B, including mountingmaterials.


Dimensions 400 x 110 x 400 mm (W x H x D)

Bowl dimensions 290 x 75 mm (D x H)

SIRW24D	Drinking fountain
ANMX-BU	Self-closing drinking bubbler
ANMX-BT	Bottle filler tap

# Chilled drinking fountains






#### CHILLED DRINKING FOUNTAIN

Water Gem water coolers and drinking fountains by KWC DVS offer a reliable solution for commercial buildings requiring chilled drinking water. Available as floor-standing or wall-mounted models, they are directly connected to the mains water supply providing an unlimited amount of fresh-tasting chilled water. Made from durable coated steel panels with an easy-to-open front panel for installation and maintenance. These products come with a standard chlorine-based water filter that should be replaced every six months.

ANMX308 Chilled drinking fountain





#### CHILLED DRINKING FOUNTAIN

Water Gem from KWC DVS offers low-maintenance water coolers and fountains for commercial buildings. These products supply unlimited chilled drinking water, come in various mount options, and have a durable, easy-to-maintain design. They also feature a standard chlorine-based filter, which should be replaced every six months.

ANMX309 Chilled drinking fountain





information about our washroom solutions visit our website

