


Electronic bib tap with battery operation

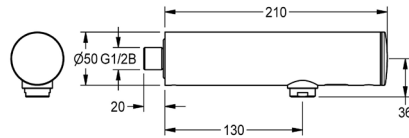

F3EV1004

Electronic bib tap

F3E bib tap DN 15 for wall mounting for sanitary facilities, opto-electronically controlled. For connection to pre-mixed hot or cold water. Control electronics, solenoid valve cartridge, 6V lithium battery (CR-P2) and sensor in all-metal housing, high-polished chromium-plated brass. Aerator with integrated flow regulator 6.0l/min. Activated water hygiene flushing 24 hours after last activation, safety switch-off with continuous reflection and saving of statistical data.

With option for parameterisation and communication via optional, bidirectional remote control.

Technical data

Calculation flow rate cold water	0.1 l/s
Compatible A3000 open	No
Default automatic hygiene flush	24 hr after the last activity
Depressurised	No
Functional principle	Electronic self-closing
Hygiene flushing	Yes
Diameter nominal	DN 15
Locking mechanism	Top section, non-ceramic
Number of batteries	1
Power supply connection	Battery 6V
Type of power supply	Battery
Spout projection	130mm
Surface finish fitting	Chromed
Surface treatment fitting	Polished
Thermal disinfection	Automatic thermal disinfection
Type of batteries	CR-P2 lithium battery 6V
Type of mounting	Wall mounting
Type of operation	Sensor operation
Type of sensor	Opto-electronic sensor
Type of tap	Bib tap
Water connection	Threaded connection (external)