KWC F4LT-Med
Thermostatic single lever mixer

Modell-Linie: F4 | F4LT1011
Taps | Manual taps

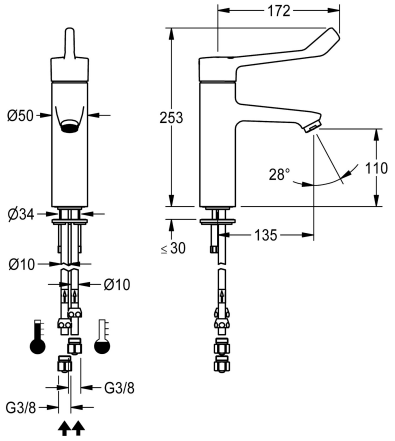

KWC-No.	water connection
2030072403	hose (gland nut)
2030072405 with connection pipes	pipe

F4LT-Med thermostatic single lever mixer as DN 15 pillar mixer for sanitary facilities in the healthcare and nursing sector, lever length 172 mm. Thermostat-controlled mixer cartridge with expansion element and active scald protection, fail-safe against backflow, as well as adjustable and turn-proof temperature stop, and ceramic disc technology. Without backflow preventer for optimised drinking water hygiene. Lever cap ergonomically designed in closed construction for contactless lever actuation. For connection to hot water and cold water via pipes, includes strainers. Tap optimised for cleaning, all-metal construction, polished chromium-plated low-lead brass (lead proportion ≤ 0.2%), with volume-reduced water flow without nickel coating. Laminar jet controller with integrated flow rate controller 8.0 l/min, projection 135 mm.

Technical Data

compatible A3000 open	no
depressurised	no
functional principle	manual
diameter nominal	DN 15
inlet size	G 3/8
Locking mechanism	Top section, ceramic
material fitting	brass
minimum flow pressure	1 bar
type of mixing	with thermostat
overall height	253 mm
overall width	50 mm
Pop-up waste set	no
Spout	fixed
spout projection	135 mm
surface finish fitting	chromed
surface treatment fitting	polished
temperature limit	yes
type of mounting	tap hole
type of operation	manual operation
type of tap	pillar tap
volume flow rate at 3 bar	0.13 l/s
water connection	pipe

KWC F4LT-Med
Thermostatic single lever mixer

Modell-Linie: F4 | F4LT1011
Taps | Manual taps

Accent colour	none
Basic colour	chrome-look (glossy)

Optional Accessories



Anti-twist protection

2030041324
ACLM1009