


## KWC F5LME Hybrid kitchen fitting

Modell-Linie: F5L | F5LME001  
Taps | Manual taps

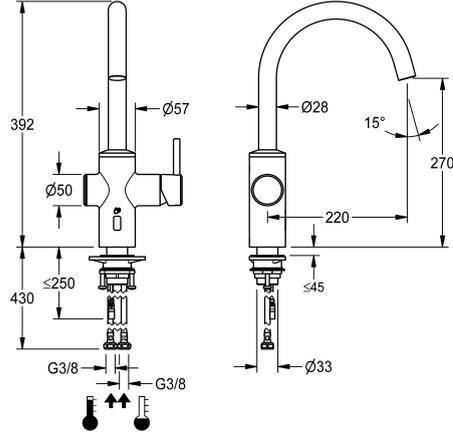

### KWC-No.

**2030061048**

F5LME hybrid kitchen fitting DN 15 as pillar mixer with swivelling spout, can be locked in the centre position. Adjustable swivel ranges of 50°, 120° and 360°. For connection to hot water and cold water via hoses with strainers. Single lever mixer with mixer cartridge with ceramic disc technology and adjustable, turn-proof temperature stop. Alternative activation using hand reflection via an opto-electronic sensor for time-controlled water release with preset mixing water temperature. Mixer cartridge, solenoid valve and sensor with control electronics in all-metal housing, brushed stainless steel. Laminar jet controller with integrated flow rate controller (8.0 l/min). Projection 220 mm. Activated water hygiene

flushing 24 hours after last activation, safety switch-off for continuous reflection and saving of statistical data. With option for parametrisation and communication via optional, bidirectional remote control. Optionally for battery operation with battery compartment including 6 V lithium battery (CR-P2) per fitting for installation under the kitchen sink or for separate power supply via 6.75 V/12 V DC power supply unit or AQUA 3000 open system accessories.

Battery compartment including battery or power supply unit with extension cable must be ordered separately.

### Technical Data

depressurised	no
with filter	yes
functional principle	manual
hygiene flushing	prepared
diameter nominal	DN 15
Locking mechanism	Top section, non-ceramic
material fitting	stainless steel
minimum flow pressure	1 bar
type of mixing	yes
Pop-up waste set	no
with rosettes/cover plate	no
Spout	rotating, top
spout projection	220 mm
surface finish fitting	brushed
temperature limit	yes
thermal disinfection	yes
type of mounting	tap hole
type of operation	manual operation
type of tap	pillar tap
volume flow rate at 3 bar	0.13 l/s
water connection	hose (gland nut)
Accent colour	none

no
yes
manual
prepared
DN 15
Top section, non-ceramic
stainless steel
1 bar
yes
no
no
rotating, top
220 mm
brushed
yes
yes
tap hole
manual operation
pillar tap
0.13 l/s
hose (gland nut)
none



## KWC F5LME Hybrid kitchen fitting


Modell-Linie: F5L | F5LME001  
Taps | Manual taps

### Mandatory Accessories



Power supply unit

**2030039477**  
ACEX9001



Extension cable 5 m

**2030043814**  
ACEX9010



In-wall power supply

**2030039825**  
ACEX9003

### Optional Accessories



Bidirectional remote control for  
electronic fittings F3 and F5

**2030036654**  
ACEX9005



2-button remote control for fittings F3  
and F5


**2030036849**  
ACEX9004



PURETHERM under-table thermostat

**2030012758**  
PURE0031

### Spare Parts



Solenoid valve cartridge

**2030045522**



**KWC** F5LME  
Hybrid kitchen fitting

**Modell-Linie: F5L | F5LME001**  
Taps | Manual taps

ACXX9002

---