


F3S Self-closing bib tap

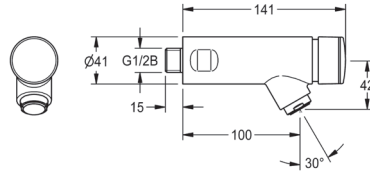

F3SV1102

Self-closing bib tap

F3S self-closing bib tap DN 15 for wall mounting for sanitary facilities. Self-closing cartridge, hydraulically controlled, piston-free design, self-closing, stepless adjustment of flow duration. For connection to pre-mixed hot water or cold water. Casing, high-polished chromium-plated brass.

Flow rate at 3 bar: 3.0 l/min.
Spout projection: 100mm

Technical data

With backflow preventer	No
Calculation flow rate cold water	0.1l/s
Compatible A3000 open	No
Depressurised	No
With filter	Yes
Adjustable flow time	Yes
Functional principle	Hydraulic self-closing
Hygiene flushing	No
Diameter nominal	DN 15
Locking mechanism	Top section, non-ceramic
Material fitting	Brass
Maximum flow time	20 seconds
Minimum flow pressure	1 bar
Minimum flow time	5 seconds
Type of mixing	No
Pop-up waste	No
With rosettes / cover plate	No
Protective shutdown	No
Spout	Fixed
Spout projection	100mm
Surface finish fitting	Chromium-plated brass
Surface treatment fitting	Polished
Temperature limit	No
Thermal disinfection	No
Type of mounting	Wall mounted
Type of operation	Manual operation

F3S Self-closing bib tap

Technical data

Type of tap	Bib tap
Volume flow rate at 3 bar	0.05/l/s
Water connection	Threaded connection (external)
Accent colour	None
Basic colour	Chrome (glossy)
Adjustable flow time	Yes
Functional principle	Hydraulic self-closing
Hygiene flushing	No
Diameter nominal	DN 15

Mandatory accessories



Mandatory accessories

AC17-047
Thermostatic mixing valve

Complimentary accessories



Complimentary accessories

SD110
Wall mounted soap dispenser