


Self-closing bib tap

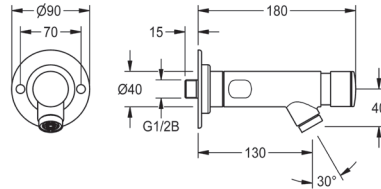

F3SV1011

Self-closing bib tap

F3S self-closing bib tap DN 15 with anti-twist protection for sanitary facilities. Especially suitable for facilities at risk of vandalism. Self-closing cartridge, hydraulically controlled, self-closing, adjustable flow duration and anti-blocking system 2 (ABS2) for safety switch-off in case of continuous operation. For connection to pre-mixed hot water or cold water. Rosette diameter 90mm for visible front mounting, with anti-twist protection for bib tap and mounting material.

All-metal construction, polished, chromium-plated brass. Anti-theft aerator with integrated flow regulator 6.0 l/min.

Technical data

Depressurised	No
Adjustable flow time	Yes
Functional principle	Hydraulic self-closing
Hygiene flushing	No
Diameter nominal	DN 15
Inlet size	G 1/2 B
Locking mechanism	Top section, non-ceramic
Temperature limit	No
Maximum flow time	20 seconds
Minimum flow pressure	1 bar
Minimum flow time	10 seconds
Overall depth	180mm
Overall height	90mm
Overall width	90mm
Spout projection	130mm
Surface finish fitting	Chromed
Surface treatment fitting	Polished
Type of mounting	Wall mounting
Type of operation	Manual operation
Water connection	Threaded connection (external)