


KWC

INFORM outlet A45 - Integrated sensor

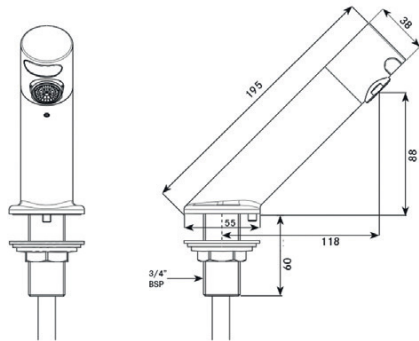

IC03-012

INFORM outlet A45

INFORM Outlet manufactured in 316 stainless steel with a brushed finish. The spout design features an anti-microbial outlet and in-built intelligent thermistor which connects to our INFORM water temperature monitoring device. Remotely monitor temperatures, control the outlet, thermal purges and fail safe checks, all verified. 5 litres per minute integrated flow control (other flow rates available).

Technical data

Material	316 stainless steel
Gross weight	1.1kg
Type of mounting	Deck mounted
Surface finish	Brushed
Type of mixing	Additional TMV may be required
Automatic purge	Yes* - default: OFF options: 3, 6, 12, 24, 36 & 48 hours
Purge run time	Default 1 min* options: OFF, 30 secs, 1, 2, 4 & 8 mins
Spout projection	118mm
Minimum flow pressure	1 bar (lower pressure station kits available)
Volume flow rate at 3 bar	5 LPM (other flow rates available)
Adjustable run time	Yes* - default: 2 secs options: 2, 5, 10, 15, 20, 30 secs
Water connection	10mm copper tails
Anti-vandal function	Yes
Lock out function	Default OFF* options: OFF, 4, 6, 8 & 10 operations
Chlorination function	Yes* - default 2 mins options: 1, 2, 3, 4, 5, 10, 20 & 30 mins)
Battery or mains station kits	Single battery: AT00-001 Single mains: AT00-002 Other options available
Working pressure	1-10 bar (for low / high pressure, contact KWC DVS)
Fixing	¾" BSP
Fixing length	Up to 50mm with flange nut