


KWC
AQUARIUS A45 black PVD finish with PEX hose

Model line: AQUARIUS | **AT10-001**

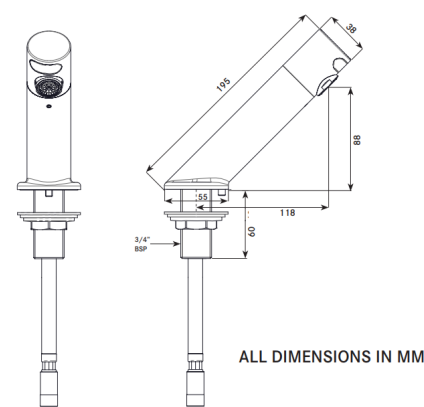

AT10-001
Aquarius A45 black PVD finish with PEX hose

The Aquarius range incorporate simple and modern design, with the latest electronic functionality. Sensor operated for maximum hygiene and efficiency. 5 litres per minute integrated flowcontrol. (Standard 5LPM, Other flow rates available) Automatic purge function, Sensor range adjustment, Wave on/wave off function,

Anti Vandaland Lock Out functions, Chlorination function. Single mixed feed connection by PEX lined hose (15mm connection). External TMV required. Requires a Station kit to operate. Station kits available in Single Station Battery or Mains Single Station, 2 Station or 3 Station for multiple connections. Refer to Station kit Data sheets.

Technical data

Material
Gross weight
Type of tap
Type of mounting
Surface finish
Type of operation
Type of mixing
Automatic purge
Purge run time
Spout projection
Minimum flow pressure
Volume flow rate at 3 bar
Adjustable run time
Water connection
Anti-Vandal function
Lock out function
Chlorination function
Battery or mains station kit
Working pressure
Max working temperature
Fixing
Fixing length

316 Stainless Steel
1.1 kg
Aquarius A45
Deck mounted
Black PVD Finish
No Touch Sensor
Additional TMV may be required
Yes* - Default: OFF/Options: 3, 6, 12, 24, 36 & 48 hours
Default 1 min/ Options: OFF, 30 secs, 1, 2, 4 & 8 mins
118mm
1.00 bar (Lower pressure station kits available)
5LPM (Other flow rates available)
Yes* - Default: 2 secs/ Options: 2, 5, 10, 15, 20, 30 secs
15mm PEX hose
Yes
Default OFF/ Options: OFF, 4, 6, 8 & 10 operations
Yes* - Default 2 mins/ Options: 1, 2, 3, 4, 5, 10, 20 & 30 mins
Single Battery: AT00-001
Single Mains: AT00-002
- Other options available. Contact KWC DVS.
1-10 Bar (For Low / High pressure, Contact KWC DVS.)
60°C
¾" BSP
Up to 50mm with flange nut