


KWC
AQUARIUS A45 gold PVD finish with PEX hose

Model line: AQUARIUS | AT10-003

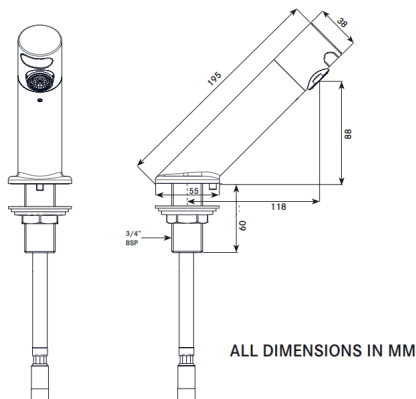

AT10-001

Aquarius A45 gold PVD finish with PEX hose

Aquarius deck mounted A45 tap manufactured in 316 stainless steel with a brushed finish. Sensor operated for maximum hygiene and efficiency. 5 litres per minute integrated flow control. (other flow rates available). Designed with automatic purge function, sensor range adjustment, wave-on/wave-off function, anti-vandal and lock out functions and a chlorination function.

Technical data

Material	316 Stainless Steel
Gross weight	1.1 kg
Type of tap	Aquarius A45
Type of mounting	Deck mounted
Surface finish	Gold PVD Finish
Type of operation	No Touch Sensor
Type of mixing	Additional TMV may be required
Automatic purge	Yes* - Default: OFF/Options: 3, 6, 12, 24, 36 & 48 hours
Purge run time	Default 1 min/ Options: OFF, 30 secs, 1, 2, 4 & 8 mins
Spout projection	118mm
Minimum flow pressure	1.00 bar (Lower pressure station kits available)
Volume flow rate at 3 bar	5LPM (Other flow rates available)
Adjustable run time	Yes* - Default: 2 secs/ Options: 2, 5, 10, 15, 20, 30 secs
Water connection	15mm PEX hose
Anti-Vandal function	Yes
Lock out function	Default OFF/ Options: OFF, 4, 6, 8 & 10 operations
Chlorination function	Yes* - Default 2 mins/ Options: 1, 2, 3, 4, 5, 10, 20 & 30 mins
Battery or mains station kit	Single Battery: AT00-001 Single Mains: AT00-002 - Other options available. Contact KWC DVS.
Working pressure	1-10 Bar (For Low / High pressure, Contact KWC DVS.)
Max working temperature	60°C
Fixing	¾" BSP
Fixing length	Up to 50mm with flange nut