KWC AQUALINE
WC flushing valve

Modell-Linie: AQUALINE | AQRM553C
Flushing systems | Self closing wc flushing system

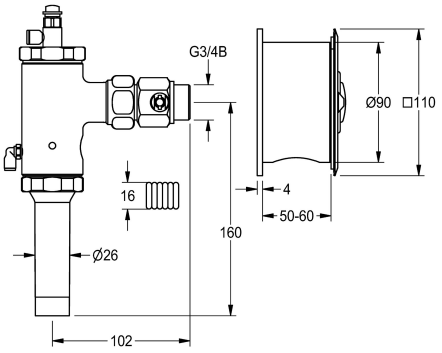

KWC-No.	sound insulation
2000103712	yes
2000101061 Version without noise group I	no

AQUALINE WC flush valve DN 20 with remote control, for vandal resistant
applications, installation of flush valve outside the user room, remote control in wall installation box with stainless steel cover plate and metal push button.

Technical Data

calculation flow rate cold wat	1 l/s
Cover plate height	110 mm
functional principle	hydraulic self-closing
diameter nominal	DN 20
material casing	stainless steel
material code casing	1.4301 Chrome Nickel steel V2A
material fitting	brass
maximum flow pressure	4 bar
maximum flushing flow	1.3 l/s
maximum flush water volume	9 Liter
minimum flow pressure	1.2 bar
minimum flushing flow	1 l/s
minimum flush water volume	6 Liter
protective shutdown	no
sound insulation	no
surface finish casing	satin finished
surface finish fitting	raw
type of flushing fitting	WC flush valve
type of mounting	concealed
type of operation	manual operation
water connection	threaded connection (external)
Basic colour	stainless steel

Spare Parts

KWC AQUALINE
WC flushing valve

Modell-Linie: AQUALINE | AQRM553C
Flushing systems | Self closing wc flushing system

Head part

2000104389
EFLSY0005