


KWC F5L-Therm
Thermostatic single-lever wall-mounted mixer with pre-fitted hygiene unit

Modell-Linie: F5L | F5LT1113
Taps | Manual taps

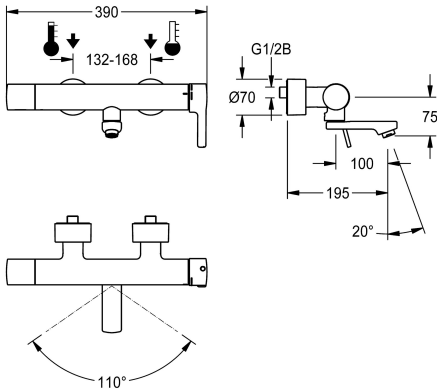

KWC-No.

3600003807
Projection 195 mm

3600003809
Projection 135 mm

3600003852
Projection 255 mm

spout projection

100 mm

40 mm

160 mm

NEW


F5L-Therm thermostatic single-lever mixer DN 15 as wall-mounted mixer for wall mounting with lockable swivelling spout, for sanitary facilities. Thermostatically controlled mixer cartridge with expansion element and active scald protection as well as adjustable and turn-proof temperature stop and ceramic disc technology. Pre-fitted hygiene unit with C-module including control electronics, 6 V lithium battery (CR-P2) and solenoid valve cartridge for automatic hygiene flushing and saving of statistical data. For connection to hot and cold water. Scald-protected, safe-touch housing, all-metal construction, polished chromium-plated brass. Volume-reduced, smooth water lines made of brass without nickel coating, decoupled

from the tap housing. With thermal insulation components to reduce heat transfer from the tap housing to the cold-water line. Laminar jet controller with integrated flow rate controller 6.0 l/min. With adjustable and lockable connections with backflow preventers and strainers, fully covered by depth-adjustable screw rosettes. 195 mm projection. Activated hygiene flushing, fixed interval of 24 hours. With option for radio-controlled parameterisation, read-out of statistical data, realisation of predefined calendar functions as well as grouping of taps to perform predefined control functions via the necessary app.

Technical Data

depressurised
adjustable flow time
functional principle
diameter nominal
inlet size
Locking mechanism
material fitting
type of mixing
Pop-up waste set
Type of power supply
protective shutdown
sound insulation
Spout
spout projection
surface finish casing
surface finish fitting
surface treatment fitting
temperature limit
with transformer/power supply

no
no
manual
DN 15
G 1/2 B
Top section, ceramic
brass
with thermostat
no
Battery
no
no
rotating, bottom
100 mm
chromed
chromed
polished
yes
no






KWC F5L-Therm
Thermostatic single-lever wall-mounted mixer with pre-fitted hygiene unit

Modell-Linie: F5L | F5LT1113
Taps | Manual taps

type of mounting	wall mounting
type of operation	manual operation
type of tap	bib tap
water connection	S-connections
Accent colour	none
Basic colour	chrome-look (glossy)

Spare Parts

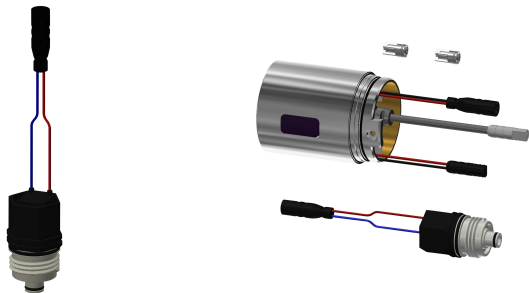

Solenoid valve cartridge
2030045522
ACXX9002

**Hygiene unit for compatible KWC
thermostatic single-lever wall-
mounted mixers**
3600003861
ACLT9001