


KWC F5L-Therm

Thermostatic single-lever wall-mounted mixer with pre-fitted hygiene unit

Modell-Linie: F5L | F5LT1114
Taps | Manual taps

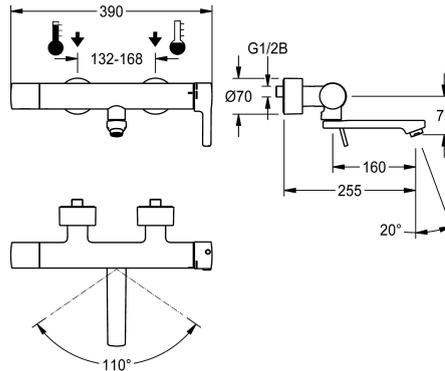

KWC-No.

3600003807

Projection 195 mm

3600003809

Projection 135 mm

3600003852

Projection 255 mm

spout projection

100 mm

40 mm

160 mm

NEW

F5L-Therm thermostatic single-lever mixer DN 15 as wall-mounted mixer for wall mounting with lockable swivelling spout, for sanitary facilities. Thermostatically controlled mixer cartridge with expansion element and active scald protection as well as adjustable and turn-proof temperature stop and ceramic disc technology. Pre-fitted hygiene unit with C-module including control electronics, 6 V lithium battery (CR-P2) and solenoid valve cartridge for automatic hygiene flushing and saving of statistical data. For connection to hot and cold water. Scald-protected, safe-touch housing, all-metal construction, polished chromium-plated brass. Volume-reduced, smooth water lines made of brass without nickel coating, decoupled

from the tap housing. With thermal insulation components to reduce heat transfer from the tap housing to the cold-water line. Laminar jet controller with integrated flow rate controller 6.0 l/min. With adjustable and lockable connections with backflow preventers and strainers, fully covered by depth-adjustable screw rosettes. 255 mm projection. Activated hygiene flushing, fixed interval of 24 hours. With option for radio-controlled parameterisation, read-out of statistical data, realisation of predefined calendar functions as well as grouping of taps to perform predefined control functions via the necessary app.

Technical Data

depressurised

adjustable flow time

functional principle

diameter nominal

inlet size

Locking mechanism

material fitting

type of mixing

overall depth

overall width

Pop-up waste set

protective shutdown

sound insulation

Spout

spout projection

surface finish casing

surface finish fitting

surface treatment fitting

temperature limit

no

no

manual

DN 15

G 1/2 B

Top section, ceramic

brass

with thermostat

275 mm

340 mm

no

no

no

rotating, bottom


160 mm

chromed

chromed

polished

yes



KWC F5L-Therm


Thermostatic single-lever wall-mounted mixer with pre-fitted hygiene unit

Modell-Linie: F5L | F5LT1114

Taps | Manual taps

with transformer/power supply	no
type of mounting	wall mounting
type of operation	manual operation
type of tap	bib tap
water connection	S-connections
Accent colour	none
Basic colour	chrome-look (glossy)

Spare Parts

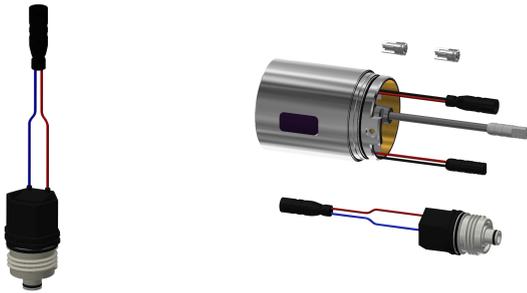

Solenoid valve cartridge

2030045522
ACXX9002

Hygiene unit for compatible KWC thermostatic single-lever wall- mounted mixers

360003861
ACT9001