


F5LM Hybrid kitchen tap

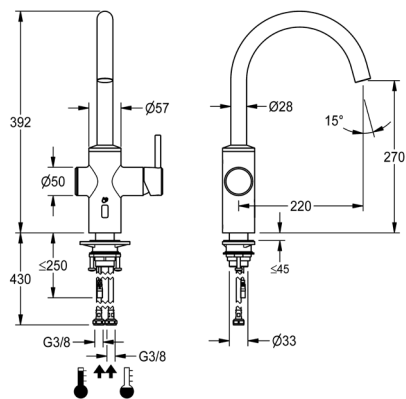

F5LME001
Hybrid kitchen tap

F5LME hybrid kitchen fitting DN 15 as pillar mixer with swivelling spout, can be locked in the centre position. Adjustable swivel ranges of 50°, 120° and 360°. For connection to hot water and cold water via hoses with strainers. Single lever mixer with mixer cartridge with ceramic disc technology and adjustable, turn-proof temperature stop. Alternative activation using hand reflection via an opto-electronic sensor for time-controlled water release with pre-set mixing water temperature.

Technical data	
Depressurised	No
With filter	Yes
Functional principle	Manual
Hygiene flushing	Prepared
Diameter nominal	DN 15
Locking mechanism	Top section, non ceramic
Material fitting	Stainless steel
Minimum flow pressure	1 bar
Type of mixing	Yes
Pop-up waste set	No
With rosettes / cover plate	No
Spout	Rotating, top
Spout projection	220mm
Surface finish fitting	Brushed
Temperature limit	Yes
Thermal disinfection	Yes
Type of mounting	Tap hole
Type of operation	Pillar tap
Volume flow rate at 3 bar	0.13/s
Water connection	Hose (gland nut)