



**KWC DVS**

Professional

Healthcare solutions



# Contents

## Table of contents

KWC DVS INTRODUCTION	1 - 9
QUALITY MATERIALS	10 - 17
PROJECT REFERENCES	18 - 19
TAPS AND SPOUTS	20 - 33
WASHBASINS	34 - 39
CLINICAL OUTLETS	40 - 43
INFORM OUTLETS	44 - 51
SURGEON SCRUB UP TROUGHS	52 - 57
MEDICAL & UTILITY SINKS	58 - 67
URINALS	68 - 77
WCS	78 - 95
CHILDREN'S HOSPITALS	96 - 103
ACCESSIBLE WASHROOMS	104 - 127
ACCESSORIES	128 - 135
SHOWERS	136 - 145
CONTROLS	146 - 151
CATERING	152 - 159



KWC DVS

# Over 235 years of washroom expertise and knowledge

Specialising in water saving technology for commercial washrooms, KWC DVS Ltd. has been producing leading automatic washroom technology for 40 years. KWC DVS is a market leader in the field of water-saving products along with automatic washroom products for specialist applications, including healthcare, mental healthcare, custodial and the public sector.

Alongside our extensive product portfolio, an expert team of engineers are on hand to support installations, whilst our technical sales teams give tailored project support and specification advice.

KWC DVS is proud to be part of a global group that manufactures products that have been used in commercial environments for many years.

The KWC brand brings together a collection of international expertise. We unite our global washroom divisions under the KWC brand.

Together, we have been developing and improving our products and expertise for decades, in some cases more than a century. This is what makes us trusted suppliers for major projects worldwide.



KWC DVS Northern Office, Chesterfield, UK



KWC DVS Southern Office, Paignton, UK





# A lifetime of reasons to choose a KWC DVS after-sales package

## Nationwide Technical Support with KWC DVS

At KWC DVS, we're more than just a manufacturer—we offer comprehensive, nationwide service and support with a fully trained, certified team ready to meet your needs across the UK. Our KWC DVS engineers are City & Guilds certified washroom product specialists and undergo rigorous Health and Safety training to deliver top-quality service.

Our Paignton Head Office houses an industry-leading after-sales team dedicated to providing seamless support to make maintenance and management as straightforward as possible.

## Commissioning – 5 Year On-Site Warranty upgrade

For those handling their own installation but wanting assurance of a compliant, efficient setup, our Commissioning Package is an ideal choice. Our experts ensure all product settings are optimised to meet your washroom's specific demands, giving you the confidence that everything is perfectly in place.

With our commissioning, your products receive an enhanced warranty, upgrading the standard 5-year warranty to a full on-site warranty for added peace of mind.

## Going Beyond Sales: Our Team is Trained for Your Safety

When it comes to water safety, there's no room for guesswork. Our entire sales team has undergone specialist training in "Legionella Control & Management for Dutyholders," giving them a deep understanding of the risks and regulations.

This expertise allows us to provide you with more than just a product—we provide a true partnership. Our team is fully equipped to guide you on best practices, identify potential risks, and ensure your water system is compliant, healthy, and safe.



Our engineers are on hand to provide support and commission your products



Sign up to a service plan and protect your products with an industry-leading lifetime warranty.



## Installation – 5 Year on-site warranty upgrade

Guarantee it's done right and choose installation by our installation experts. With the added peace of mind we'll provide an on-site warranty for 5 years for any parts we have installed or commissioned.

Our installation team operate nationwide and have extensive experience across a number of sectors including transport, healthcare, mental healthcare, custodial and retail.

## Servicing – Lifetime warranty upgrade

Investing in our annual service package is the best way to protect the longevity and performance of your washroom water controls. With regular maintenance and parts replacement, we ensure that your controls are operating with optimum water efficiency, minimising waste and maximising performance. By maintaining a live service package, you can enjoy the peace of mind that comes with a lifetime warranty for all eligible products. Trust us to keep your washroom water controls in top condition for years to come.

Contact our after-sales team now to discuss your package options: [kwcdvstechsupport@kwc.com](mailto:kwcdvstechsupport@kwc.com) | +44 (0)1803 529021



Welcome to the world of INFORM

# Leading the way in infection prevention

**INFORM Control**

INFORM Control allows you to understand the behaviour of your water system, remotely implement changes and see the impact in real-time, from anywhere in the world.

With unrivalled wireless, remote control. INFORM Control can remotely monitor, disinfect and verify multiple events including remote wireless control of valves, remote or on-site programming, quantifying valve operations, timed & dynamic hygiene purges, identification of infrequently used outlets, monitor temperatures, thermal disinfections & cold-water isolation checks on TMVs.

With a selection of user-friendly, configurable alarms which can be set to alert when required temperature or usage profiles are not met, thus aiding compliance. All in one user-friendly online platform.



**INFORM Monitor**

Monitor water temperatures to ensure a greater understanding of your water systems behaviour and be alerted when operating outside the required parameters. This smart digital solution provides detailed, exportable data for current and historical periods. Discover trends and the impact of operational changes or remedial works. Identification of high-performing areas can allow replication and improvement across your water system.

INFORM Monitor's data empowers confident decisions with clear evidence, replacing guesswork and assumptions. With a selection of user-friendly, configurable alarms which can be set to alert when required temperature profiles are not met, thereby aiding compliance. Prioritise areas of greatest need and maximise efficiency. Easy to use online platform packed with features.

**INFORM Outlet**

INFORM Outlet has been developed to accurately measure the water temperature as close as possible to the point of discharge. INFORM Outlet taps & spouts feature an in-built anti-microbial outlet and intelligent thermistors which connect directly to the INFORM platform. The range includes taps, spouts, shower towers, vanity units & ligature-resistant basins. When combined with the INFORM Monitor device, INFORM Outlet provides the most accurate, remote monitoring solution.



**INFORM Custodial**

Designed to overcome the specific control challenges of high-security facilities, providing a safer environment for prisoners, patients and staff alike.

INFORM Custodial is a wired networked system that gives the option to control water or when required power, light and water in individual or multiple rooms. Options include the ability to effortlessly oversee individual rooms or exercise centralised control over an entire section, all with just a few clicks.

When used in combination with our industry leading ligature-resistant sanitaryware, we can offer a complete, intelligent solution for the most demanding of environments.



Quality materials

# Miranit® and GRP - Robust solid surface materials for all environments

**Miranit composite**

Miranit® is made of shatter-proof, resin-bonded mineral granite, providing a modern and aesthetically pleasing design in public and semi-public environments. Cast in a single mould without adhesive seams or joints, Miranit® products feature the following important characteristics: high stability, elegant appearance and high durability due to the smooth, pore-free, hygienic and easy-to-maintain gelcoat surface.

Miranit® is a stable compound consisting of approximately 80% natural minerals such as marble, sandstone and quartz sand and about 20% high-quality unsaturated polyester resin. The final product is highly stable in combination with the unsaturated polyester resin, it also has excellent forming characteristics to facilitate easy production into cast moulds. This makes it possible to create products of almost any shape. Miranit has many advantages compared to traditional ceramic sanitaryware.

Sanitary products manufactured under the brand name Miranit® can be classed under the generic term 'cast mineral products'. Compared to other cast products, such as ceramic sanitaryware, Miranit® products have the following advantages:

- Hygienic surface finish
- Resistant to temperatures up to 80°C
- Smooth, pore-free and high-gloss gelcoat surface
- Cast in a single mould without any seams or joints
- Impact resistance and shatter-proof
- A fracture-resistant compound made of natural minerals
- The small radii of surface edges provide a modern design
- Customisable and bespoke options available
- A max. length of 3.6m for bespoke washbasins
- Bespoke washbasins can be cut to length on-site
- Choice of colours and integrated accessories
- Choice of finishes - high-gloss or solid matt



Miranit contains 80% natural minerals such as marble, sandstone and quartz sand and approximately 20% high-quality unsaturated polyester resin.



**Glass-reinforced polyester - MOJ approved for the most demanding of environments**

Our glass-reinforced polyester (GRP) is a high-impact and corrosion-resistant composite material. Our expertise in working with GRP in the Mental Health and Custodial sectors spans many decades. Our expert UK-based team is able to produce safe, ligature-resistant products that best meet the needs of the client and associated regulatory bodies in these fields. Our products have been tried and tested by the NHS, MOJ, and MOD in the toughest of environments.

Although lightweight and easy to mount on existing structures, GRP is also highly robust. The production technique used to manufacture GRP is similar to that used to produce ballistic armour. Our GRP products are finished with a thick white gel coat, which makes them highly durable and provides a modern finish. GRP is also fire retardant, making it ideal for high-security or correctional facilities.

GRP is well suited when designing load-bearing products such as sanitaryware because its high-strength properties can fulfil the requirements for this application. GRP also allows for less material to be used than other structural materials. These properties make GRP ideal for high-security environments, ensuring ligature resistance and long-lasting product life.

Our GRP products have been meticulously crafted for the most stringent, high-security environments. Designed with an unwavering focus on safety, they stand as a testament to our commitment to providing safety within mental health and high-security environments.



## Quality materials

# Stainless steel - a hygienic, durable and low maintenance solution

### Stainless steel



Washroom products crafted from high-quality stainless steel are the ideal choice for durability, hygiene, and ease of maintenance. Designed to inhibit vandalism and withstand heavy use, stainless steel fixtures are exceptionally easy to clean, helping building operators keep service and maintenance costs low.

With natural resistance to moisture, most acids, and extreme temperatures, stainless steel stands out for its strength and hygienic properties - qualities that make it especially suited for demanding environments like hospitals and food processing plants. The smooth, pore-free surface allows dirt and oils to be easily washed away without the need for harsh cleaning chemicals, making routine maintenance simple and environmentally friendly.

At its core, stainless steel is a low-carbon steel containing at least 10.5% chromium and no more than 1.2% carbon. This unique composition creates a self-regenerating layer that shields the material from corrosion, ensuring long-lasting performance superior to that of unalloyed steel.

Chromium is the key to stainless steel's rust-resistant properties, allowing it to age gracefully without deteriorating. KWC uses steel with a higher chromium content and added nickel alloy in its sanitary products, further boosting resistance to corrosion and ensuring durability.

For washrooms that endure daily wear and demand high standards of hygiene, stainless steel is the ultimate choice.



### Stainless steel surface overview

The stainless steel used in our products, Material Number 1.4301 (AISI 304), adheres to DIN EN 10088 standards, ensuring top quality and durability. With a composition of 18% chromium and 10% nickel, AISI 304 stainless steel offers outstanding corrosion resistance, strength, and longevity, making it ideal for high-use environments.

Beyond its durability, stainless steel is also 100% recyclable, contributing to sustainable manufacturing and reducing environmental impact.



Washroom sanitaryware

# Ceramics - The SanCeram collection

Looking for the perfect ceramic sanitaryware to complement your KWC DVS automatic washroom products? Look no further than the SanCeram collection, which includes WC pans, urinals, and basins.

Made from high-quality vitreous china that meets BS 3402 standards, these ceramics feature an integral glaze that resists water absorption, burning, stains, scratching, and even acid or alkali attacks. By pairing SanCeram ceramics with KWC DVS products, you can enjoy a complete washroom solution that's both easy and professional.

**The SanCeram Promise**

**Quality Guarantee**

We promise to bring our customers the very best products in the market place. That's why we are confident to offer a 25-year warranty on all our ceramics.

**Extensive Product Range**

Our breadth of range is extraordinary. Whatever the project, whatever the space, we have a product that fits perfectly.

**Unrivalled Support**

Our team of experts are on hand to help you every step of the way. From choosing the right product to technical and installation queries, we are only a call or email away.

**Surprisingly Affordable**

We don't believe in nasty surprises. With SanCeram you have our word that quality and style won't cost you a fortune.

**Environmentally Friendly**

We are dedicated to preserving our planet. The SanCeram range is manufactured using eco-friendly methods and our water-saving products will help toward earning BREEAM credits.



**Cost effective**  
Savings of up to 40%



**25 Year Warranty**  
Our ceramics come with a 25 year warranty



**Approved & Certified**  
SanCeram contains HBN, DDA, WRAS approved and LABC certified products



**Contemporary Styling**  
Inspired modern designs without compromising on quality



**Specification Support**  
We are on hand to offer support through our free NBS writing service



**Technical support**  
Dedicated technical team to offer support and advice throughout the project



**Speedy delivery**  
Fast and efficient delivery, stocked items delivered within 48 hours





# Antimicrobial properties for ultimate hygiene

BioMaster pioneered the use of anti-microbial additives and remains the recognised leader and most trusted supplier of anti-microbial technology for polymers, textiles, paints and coatings.

We have a range of products manufactured using BioMaster, such as Multi-Spouts, anti-microbial valves, station kits and more, providing ultimate hygiene in public or semi-public environments. Our INFORM Outlet water temperature monitoring tap features an anti-microbial outlet made with BioMaster and can be operated using our BioMaster anti-microbial valves.



BioMaster binds to the cell wall disrupting growth




The silver ions stop the cell from producing energy




...and interrupt the cells DNA, preventing replication



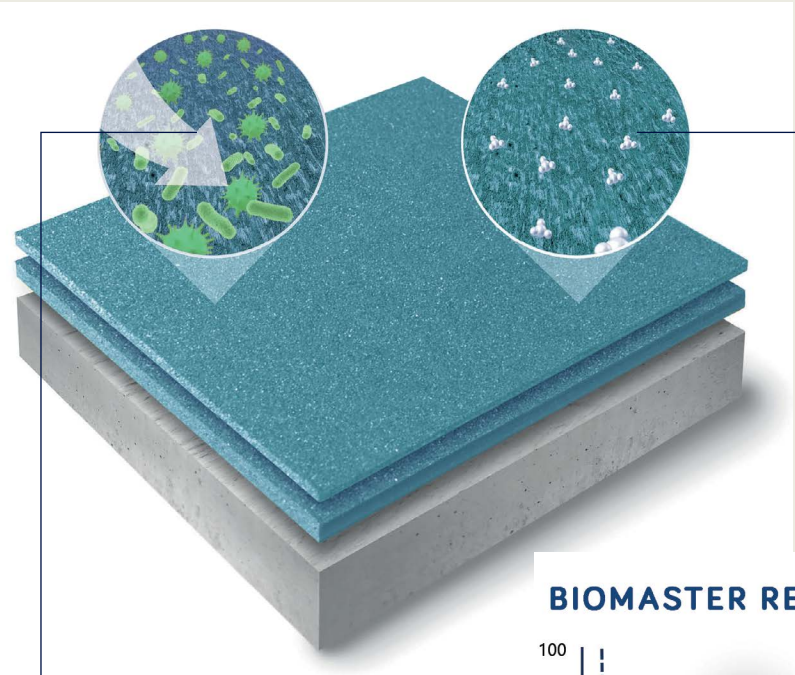


**WITHOUT BIOMASTER™**  
Microbes settle and multiply on surfaces, causing degradation.

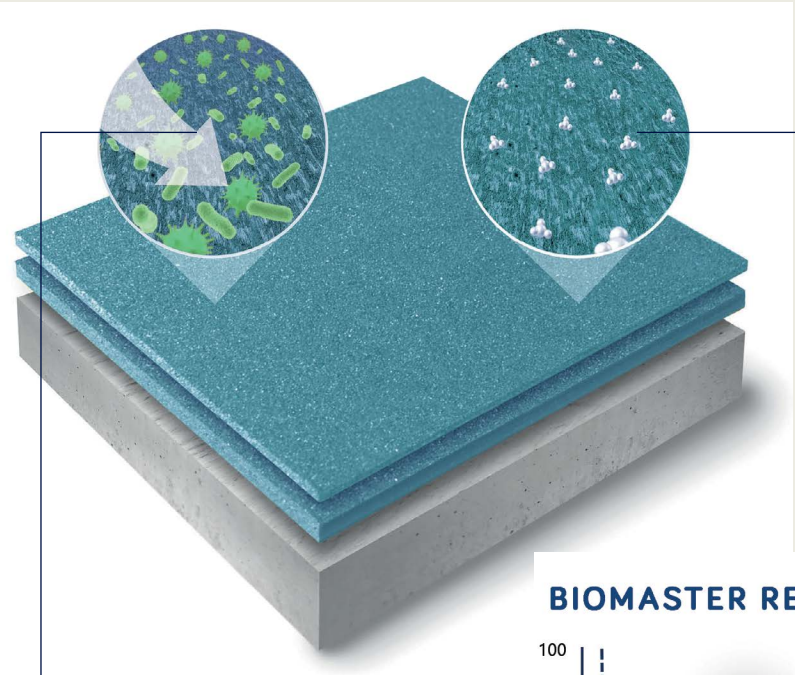

**WITH BIOMASTER™**  
Silver ions actively inhibit all microbes and protects the surface.

### BIOMASTER REDUCTION TIMES\*

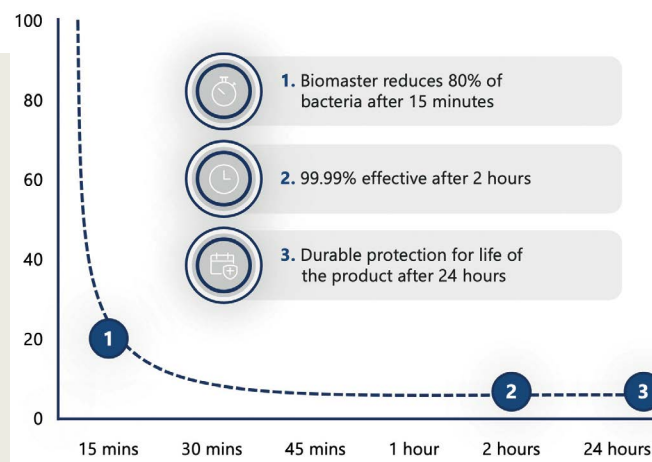

- 1. Biomaster reduces 80% of bacteria after 15 minutes
- 2. 99.99% effective after 2 hours
- 3. Durable protection for life of the product after 24 hours

\*For illustrative purposes only, actual reduction rate varies depending on material and addition rate

**How effective is BioMaster?**  
Very. Polygiene BioMaster™ is proven to inhibit the growth of microbes by up to 99.99%.

**Is BioMaster safe?**  
Yes. It is based on silver ion technology, recognised for centuries with no harmful effects. Polygiene is used in medical, food and water applications.

**What's the difference between anti-microbial and antibacterial?**  
An anti-microbial inhibits the growth of or destroys harmful microorganisms such as bacteria, fungi and moulds. An antibacterial specifically prevents the growth of bacteria.

**Has BioMaster been tested?**  
Yes, repeatedly. BioMaster is tested to ISO standards. We also undertake ongoing quality control tests and environmental trials.

**How long is BioMaster effective?**  
BioMaster is effective for the intended lifetime of the product it's added to. It is built-in and doesn't wear off or leach out.

**Does BioMaster affect a product in any way?**  
No. You can't see, smell or even taste BioMaster.


**Can a BioMaster-treated polymer be recycled?**  
Yes. It can be recycled effectively without any complications.



# Project references

## Revolutionising Water Management at Great Ormond Street Hospital

The world's leading children's hospital, Great Ormond Street, has undertaken a monumental transformation, and at the heart of this redevelopment stood the need for an advanced water management solution. KWC DVS were on hand to provide support for this flagship project. Our intelligent water management system is helping significantly improve both hygiene and water efficiency through convenient central monitoring and control.

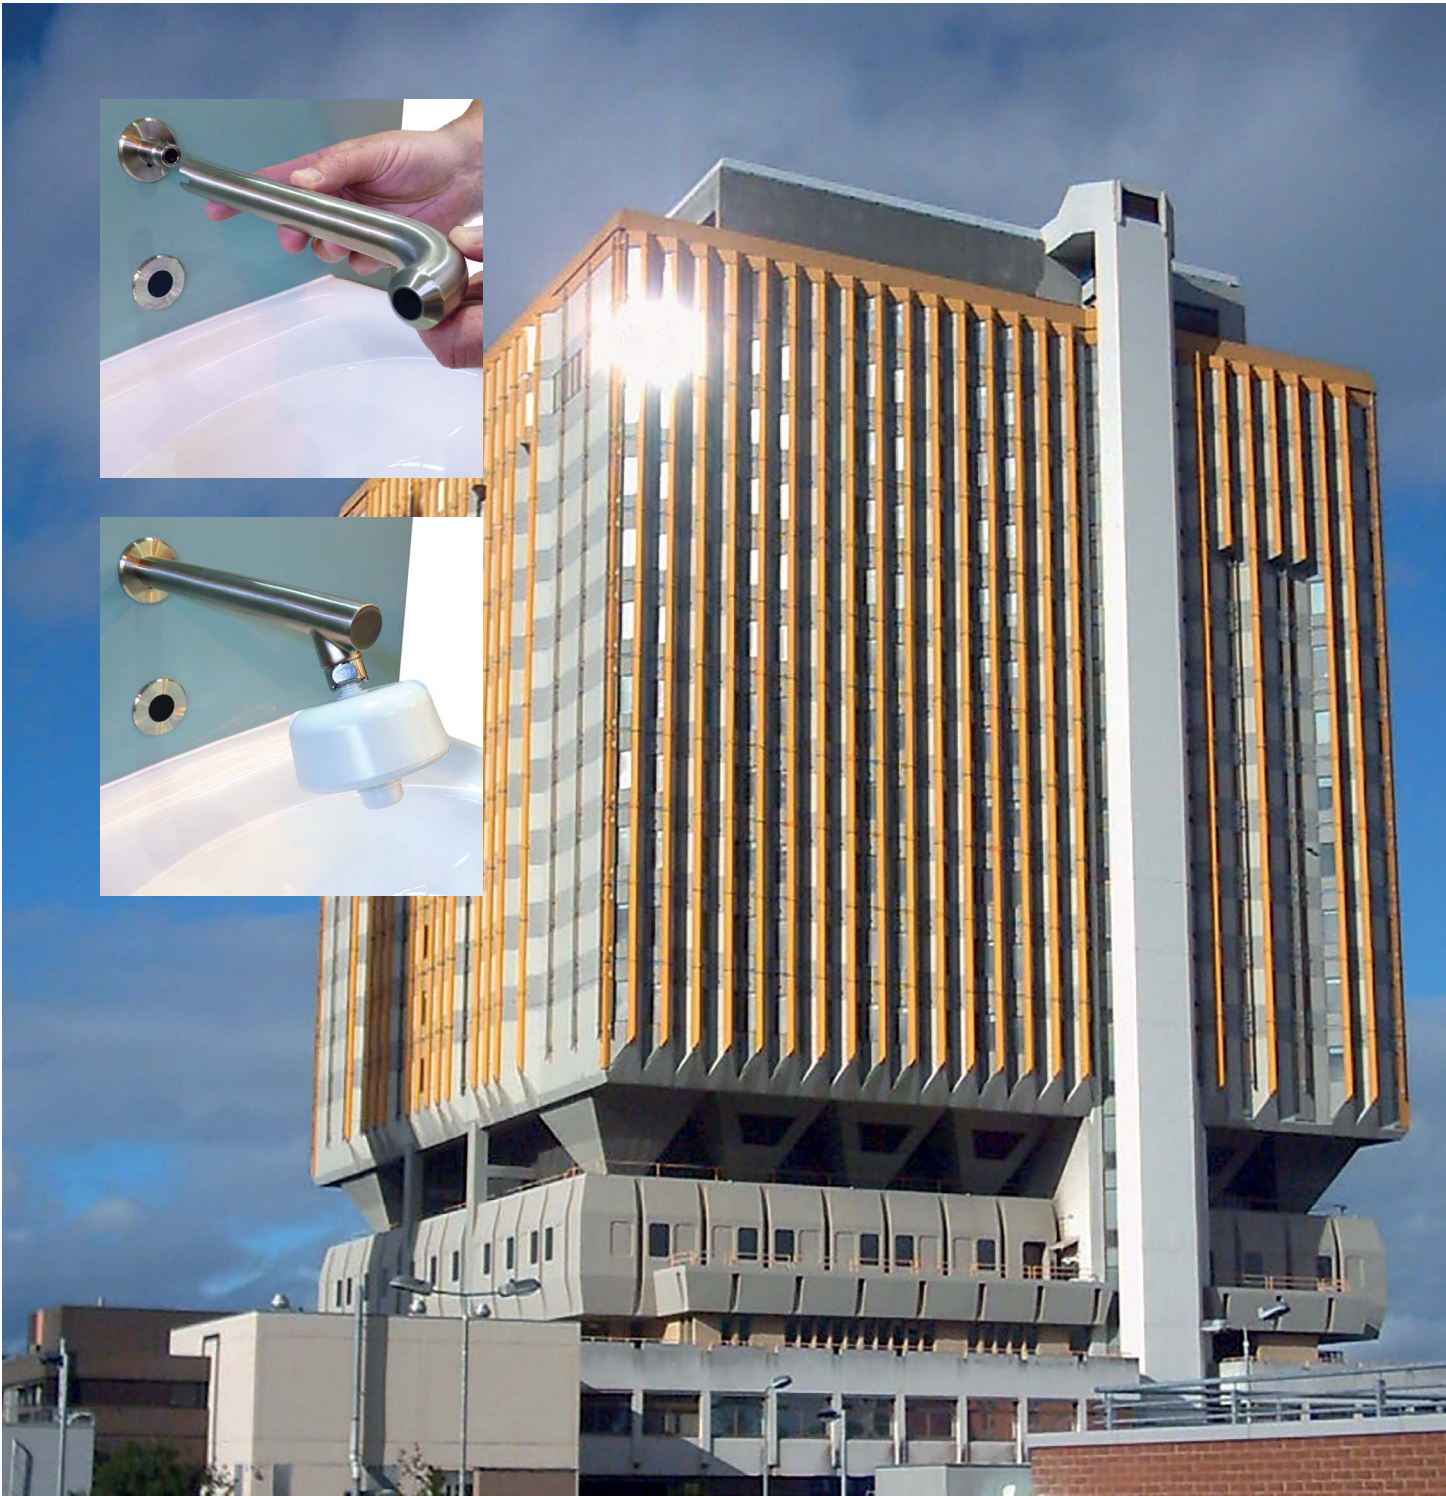

## Belfast City Hospital, Northern Ireland

The Belfast City Hospital located in Northern Ireland, is a 900-bed modern University Teaching Hospital providing local acute services and key regional specialities. Designed to the highest building and infection control standards. Medi-10 autoclavable spouts have been installed to provide the ability to carry out and monitor hygiene purges.

The autoclavable design of the Medi-10 spout provides the on-site team with the ability to easily disinfect the outlets away from the ward whilst minimising downtime. The Medi-10 range also includes the functionality to attach point of use filters as required.

Coupled with our intelligent water management system, the Trust can control valves, monitor temperatures, see valve counts, set timed hygiene purges and identify infrequently used outlets etc. All events are monitored, verified and form part of the extensive range of management information available.





## Taps and spouts


KWC DVS's range of taps and spouts are designed to meet the demanding needs of healthcare environments, where hygiene, reliability, and water efficiency are critical.

Engineered for clinics, hospitals, and care facilities, these advanced tap systems support infection control protocols by minimising touchpoints and enabling easy, hygienic use. Water-saving technology supports sustainability goals while helping to reduce utility costs—making this range an ideal choice for high-traffic healthcare settings where safety and cleanliness come first.



# 316 Stainless steel taps built to last


No wet testing  
in compliance  
with NHS  
Estates Technical  
Bulletin (NETB)  
No.2024/3

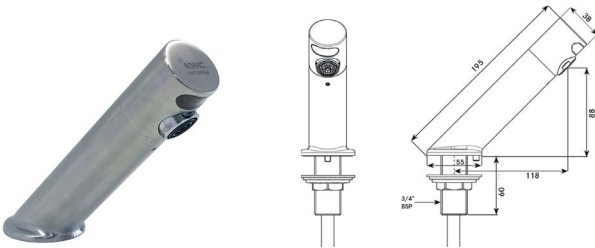

**AQUARIUS A45 TAP SPOUT - BRUSHED**

Aquarius deck mounted A45 tap manufactured in 316 stainless steel with a brushed finish. Sensor operated for maximum hygiene and efficiency. 5 litres per minute integrated flow control. (other flow rates available). Designed with automatic purge function, sensor range adjustment, wave-on/wave-off function, anti-vandal and lock out functions and a chlorination function.  
Spout projection: 118mm


AT03-011	With PEX hose (15mm)
AT03-012	With copper tails (10mm)
<b>Mandatory Accessories:</b>	
AT00-221	Single station anti-microbial mains kit
AC17-047	TMV3
<b>Complimentary Accessories:</b>	
SD01-012	A45 soap dispenser
AT00-133	Unrestricted ABS antimicrobial flow straightener

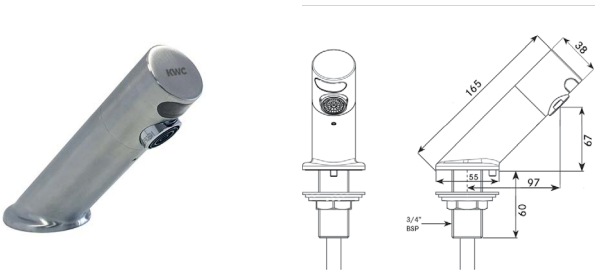

**AQUARIUS A45 DOC M TAP SPOUT - BRUSHED**

Aquarius deck mounted A45 Doc M tap manufactured in 316 stainless steel with a brushed finish. Sensor operated for maximum hygiene and efficiency. 5 litres per minute integrated flow control. (other flow rates available). Designed with automatic purge function, sensor range adjustment, wave-on/wave-off function, anti-vandal and lock out functions and a chlorination function.  
Spout projection: 97mm


AT03-021	With PEX hose (15mm)
AT03-022	With copper tails (10mm)
<b>Mandatory Accessories:</b>	
AT00-221	Single station anti-microbial mains kit
AC17-047	TMV3
<b>Complimentary Accessories:</b>	
SD01-012	A45 soap dispenser
AT00-133	Unrestricted ABS antimicrobial flow straightener

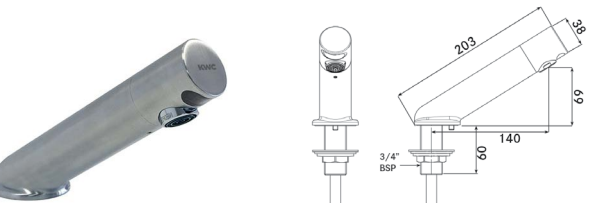

**AQUARIUS A32 TAP SPOUT - BRUSHED**

Aquarius deck mounted A32 tap manufactured in 316 stainless steel with a brushed finish. Sensor operated for maximum hygiene and efficiency. 5 litres per minute integrated flow control. (other flow rates available). Designed with automatic purge function, sensor range adjustment, wave-on/wave-off function, anti-vandal and lock out functions and a chlorination function.  
Spout projection: 140mm


AT03-001	With PEX hose (15mm)
AT03-002	With copper tails (10mm)
<b>Mandatory Accessories:</b>	
AT00-221	Single station anti-microbial mains kit
AC17-047	TMV3
<b>Complimentary Accessories:</b>	
SD01-012	A45 soap dispenser
AT00-133	Unrestricted ABS antimicrobial flow straightener



**AQUARIUS TAP 150MM - BRUSHED**

Aquarius 150mm wall-mounted tap manufactured in 316 stainless steel with a brushed finish. Sensor operated for maximum hygiene and efficiency. 5 litres per minute integrated flow control. (other flow rates available). Designed with automatic purge function, sensor range adjustment, wave-on/wave-off function, anti-vandal and lock out functions and a chlorination function.  
Spout projection: 120mm


AT02-001	With PEX hose (15mm)
AT02-002	With copper tails (10mm)
AT02-003	Stainless tail (10mm)
<b>Mandatory Accessories:</b>	
AT00-221	Single station anti-microbial mains kit
AC17-047	TMV3
<b>Complimentary Accessories:</b>	
SD01-005	Wall-mounted soap dispenser
AT00-133	Unrestricted ABS antimicrobial flow straightener



**AQUARIUS TAP 200MM - BRUSHED**

Aquarius 200mm wall-mounted tap manufactured in 316 stainless steel with a brushed finish. Sensor operated for maximum hygiene and efficiency. 5 litres per minute integrated flow control. (other flow rates available). Designed with automatic purge function, sensor range adjustment, wave-on/wave-off function, anti-vandal and lock out functions and a chlorination function.  
Spout projection: 170mm

AT02-011	With PEX hose (15mm)
AT02-012	With copper tails (10mm)
AT02-013	Stainless tail (10mm)
<b>Mandatory Accessories:</b>	
AT00-221	Single station anti-microbial mains kit
AC17-047	TMV3
<b>Complimentary Accessories:</b>	
SD01-005	Wall-mounted soap dispenser
AT00-133	Unrestricted ABS antimicrobial flow straightener



**AQUARIUS TAP 250MM - BRUSHED**


Aquarius 250mm wall-mounted tap manufactured in 316 stainless steel with a brushed finish. Sensor operated for maximum hygiene and efficiency. 5 litres per minute integrated flow control. (other flow rates available). Designed with automatic purge function, sensor range adjustment, wave-on/wave-off function, anti-vandal and lock out functions and a chlorination function.  
Spout projection: 220mm

AT02-021	With PEX hose (15mm)
AT02-023	With copper tails (10mm)
AT02-024	Stainless tail (10mm)
<b>Mandatory Accessories:</b>	
AT00-221	Single station anti-microbial mains kit
AC17-047	TMV3
<b>Complimentary Accessories:</b>	
SD01-005	Wall-mounted soap dispenser
AT00-133	Unrestricted ABS antimicrobial flow straightener



# Polished 316 Stainless steel taps

No wet testing  
in compliance  
with NHS  
Estates Technical  
Bulletin (NETB)  
No.2024/3

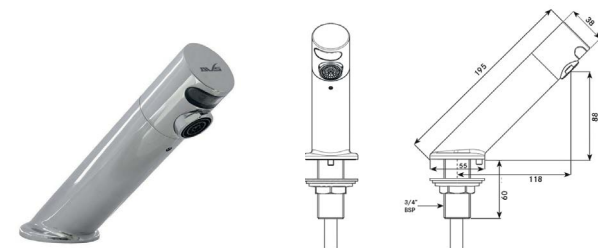


**AQUARIUS A45 TAP SPOUT - POLISHED**

Aquarius deck mounted A45 tap manufactured in 316 stainless steel with a polished finish. Sensor operated for maximum hygiene and efficiency. 5 litres per minute integrated flow control. (other flow rates available). Designed with automatic purge function, sensor range adjustment, wave-on/wave-off function, anti-vandal and lock out functions and a chlorination function.

Spout projection: 118mm

<b>AT03-013</b>	With PEX hose (15mm)
<b>AT03-014</b>	With copper tails (10mm)
<b>Mandatory Accessories:</b>	
<b>AT00-221</b>	Single station anti-microbial mains kit
<b>AC17-047</b>	TMV3
<b>Complimentary Accessories:</b>	
<b>SD01-013</b>	A45 soap dispenser
<b>AT00-133</b>	Unrestricted ABS antimicrobial flow straightener

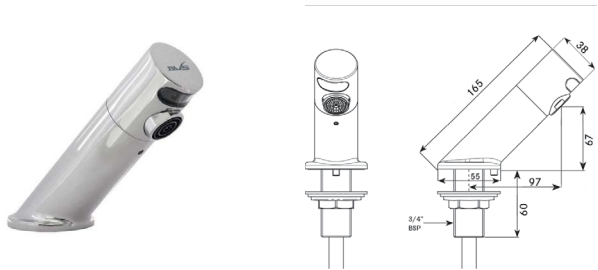


**AQUARIUS A45 DOC M TAP SPOUT - POLISHED**

Aquarius deck mounted A45 Doc M tap manufactured in 316 stainless steel with a polished finish. Sensor operated for maximum hygiene and efficiency. 5 litres per minute integrated flow control. (other flow rates available). Designed with automatic purge function, sensor range adjustment, wave-on/wave-off function, anti-vandal and lock out functions and a chlorination function.

Spout projection: 97mm

<b>AT03-023</b>	With PEX hose (15mm)
<b>AT03-024</b>	With copper tails (10mm)
<b>Mandatory Accessories:</b>	
<b>AT00-221</b>	Single station anti-microbial mains kit
<b>AC17-047</b>	TMV3
<b>Complimentary Accessories:</b>	
<b>SD01-013</b>	A45 soap dispenser
<b>AT00-133</b>	Unrestricted ABS antimicrobial flow straightener

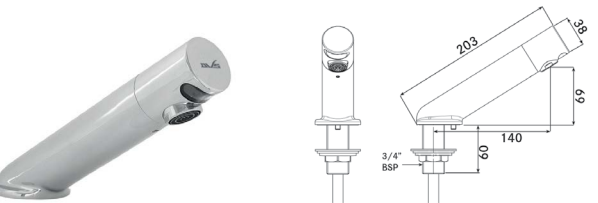


**AQUARIUS A32 TAP SPOUT - POLISHED**

Aquarius deck mounted A32 tap manufactured in 316 stainless steel with a polished finish. Sensor operated for maximum hygiene and efficiency. 5 litres per minute integrated flow control. (other flow rates available). Designed with automatic purge function, sensor range adjustment, wave-on/wave-off function, anti-vandal and lock out functions and a chlorination function.

Spout projection: 140mm

<b>AT03-003</b>	With PEX hose (15mm)
<b>AT03-004</b>	With copper tails (10mm)
<b>Mandatory Accessories:</b>	
<b>AT00-221</b>	Single station anti-microbial mains kit
<b>AC17-047</b>	TMV3
<b>Complimentary Accessories:</b>	
<b>SD01-013</b>	A45 soap dispenser
<b>AT00-133</b>	Unrestricted ABS antimicrobial flow straightener




**AQUARIUS TAP 150MM - POLISHED**

Aquarius 150mm wall-mounted tap manufactured in 316 stainless steel with a polished finish. Sensor operated for maximum hygiene and efficiency. 5 litres per minute integrated flow control. (other flow rates available). Designed with automatic purge function, sensor range adjustment, wave-on/wave-off function, anti-vandal and lock out functions and a chlorination function.

Spout projection: 120mm

<b>AT02-005</b>	With PEX hose (15mm)
<b>AT02-006</b>	With copper tails (10mm)
<b>Mandatory Accessories:</b>	
<b>AT00-221</b>	Single station anti-microbial mains kit
<b>AC17-047</b>	TMV3
<b>Complimentary Accessories:</b>	
<b>SD01-001</b>	Wall-mounted soap dispenser
<b>AT00-133</b>	Unrestricted ABS antimicrobial flow straightener




**AQUARIUS TAP 200MM - POLISHED**

Aquarius 200mm wall-mounted tap manufactured in 316 stainless steel with a polished finish. Sensor operated for maximum hygiene and efficiency. 5 litres per minute integrated flow control. (other flow rates available). Designed with automatic purge function, sensor range adjustment, wave-on/wave-off function, anti-vandal and lock out functions and a chlorination function.

Spout projection: 170mm

<b>AT02-015</b>	With PEX hose (15mm)
<b>AT02-016</b>	With copper tails (10mm)
<b>Mandatory Accessories:</b>	
<b>AT00-221</b>	Single station anti-microbial mains kit
<b>AC17-047</b>	TMV3
<b>Complimentary Accessories:</b>	
<b>SD01-001</b>	Wall-mounted soap dispenser
<b>AT00-133</b>	Unrestricted ABS antimicrobial flow straightener



**AQUARIUS TAP 250MM - POLISHED**

Aquarius 250mm wall-mounted tap manufactured in 316 stainless steel with a polished finish. Sensor operated for maximum hygiene and efficiency. 5 litres per minute integrated flow control. (other flow rates available). Designed with automatic purge function, sensor range adjustment, wave-on/wave-off function, anti-vandal and lock out functions and a chlorination function.

Spout projection: 220mm


<b>AT02-025</b>	With PEX hose (15mm)
<b>AT02-026</b>	With copper tails (10mm)
<b>Mandatory Accessories:</b>	
<b>AT00-221</b>	Single station anti-microbial mains kit
<b>AC17-047</b>	TMV3
<b>Complimentary Accessories:</b>	
<b>SD01-001</b>	Wall-mounted soap dispenser
<b>AT00-133</b>	Unrestricted ABS antimicrobial flow straightener



KWC DVS washrooms

# Taps and spouts

No wet testing  
in compliance  
with NHS  
Estates Technical  
Bulletin (NETB)  
No.2024/3

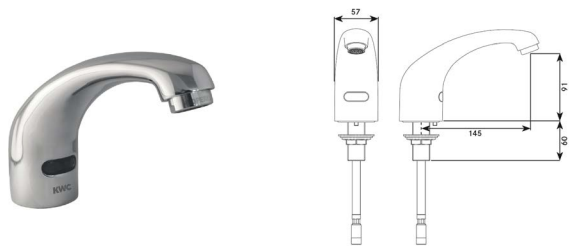

**CLASSIC TOUCH-FREE TAP**

Classic touch-free tap manufactured in brass with a chromed finish. Sensor operated for maximum hygiene and efficiency. 5 litres per minute integrated flow control (other flow rates available). Designed with automatic purge function, sensor range adjustment, wave-on/ wave-off function, anti-vandal and lock out functions and a chlorination function.  
Spout projection: 145mm

AT01-001	With PEX hose (15mm)
AT01-002	With copper tails (10mm)
AT01-003	With stainless tails (10mm)
<b>Mandatory Accessories:</b>	
AT00-221	Single station anti-microbial mains kit
AC17-047	TMV3
<b>Complimentary Accessories:</b>	
SD01-002	Swan neck soap dispenser



**CLASSIC SWAN TOUCH-FREE TAP**

Classic Swan touch-free tap manufactured in brass with a chromed finish. Sensor operated for maximum hygiene and efficiency. 5 litres per minute integrated flow control (other flow rates available). Designed with automatic purge function, sensor range adjustment, wave-on/wave-off function, anti-vandal and lock out functions and a chlorination function.  
Spout projection: 145mm


AT01-011	With PEX hose (15mm)
AT01-012	With copper tails (10mm)
AT01-013	With stainless tails (10mm)
<b>Mandatory Accessories:</b>	
AT00-221	Single station anti-microbial mains kit
AC17-047	TMV3
<b>Complimentary Accessories:</b>	
SD01-002	Swan neck soap dispenser



**AQUARIUS HIGH NECK TAP**

Aquarius high neck tap manufactured from 316 stainless steel with a brushed or polished finish. Sensor operated for maximum hygiene and efficiency. 5 litres per minute integrated flow control (other flow rates available). Designed with automatic purge function, sensor range adjustment, wave-on/wave-off function, anti-vandal and lock out functions and a chlorination function.  
Spout projection: 130mm


AT03-041	Brushed with PEX hose (15mm)
AT03-043	Polished with PEX hose (15mm)
<b>Mandatory Accessories:</b>	
AT00-221	Single station anti-microbial mains kit
AC17-047	TMV3
<b>Complimentary Accessories:</b>	
SD01-008	Pillar soap dispenser (Nickel brushed)
AT00-133	Unrestricted ABS antimicrobial flow straightener

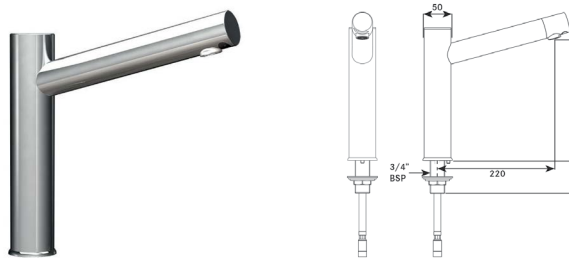

**AQUARIUS TALL PILLAR TAP**

Aquarius tall pillar tap manufactured in brass with a chromed finish. Sensor operated for maximum hygiene and efficiency. 5 litres per minute integrated flow control (other flow rates available). Designed with automatic purge function, sensor range adjustment, wave-on/ wave-off function, anti-vandal and lock out functions and a chlorination function. Single mixed feed connection by With PEX lined hose (15mm connection).  
Spout projection: 220mm


AT03-061	Tall pillar tap
<b>Mandatory Accessories:</b>	
AT00-221	Single station anti-microbial mains kit
AC17-047	TMV3
<b>Complimentary Accessories:</b>	
SD01-003	Pillar soap dispenser (chrome)
SW00-066	Rectangular Langley countertop basin
SW00-067	Circular Langley countertop basin
AT00-133	Unrestricted ABS antimicrobial flow straightener

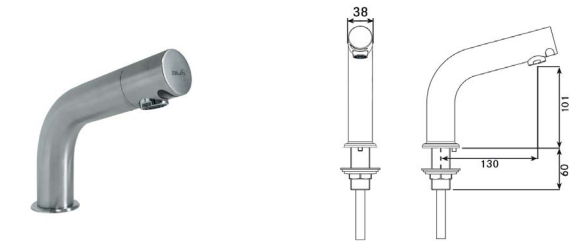

**AQUARIUS SHORT NECK TAP**

Aquarius short neck tap manufactured from 316 stainless steel with a brushed finish. Sensor operated for maximum hygiene and efficiency. 5 litres per minute integrated flow control (other flow rates available). Designed with automatic purge function, sensor range adjustment, wave-on/wave-off function, anti-vandal and lock out functions and a chlorination function.  
Spout projection: 130mm

AT03-031	Brushed with PEX hose (15mm)
AT03-032	Brushed with copper tails (10mm)
AT03-034	Polished with PEX hose (15mm)
<b>Mandatory Accessories:</b>	
AT00-221	Single station anti-microbial mains kit
AC17-047	TMV3
<b>Complimentary Accessories:</b>	
SD01-008	Pillar soap dispenser (Nickel brushed)
AT00-133	Unrestricted ABS antimicrobial flow straightener

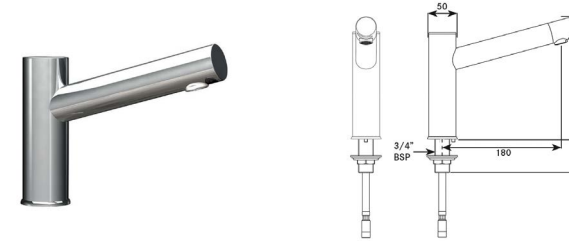

**AQUARIUS SHORT PILLAR TAP**

Aquarius short pillar tap manufactured in brass with a chromed finish. Sensor operated for maximum hygiene and efficiency. 5 litres per minute integrated flow control (other flow rates available). Designed with automatic purge function, sensor range adjustment, wave-on/ wave-off function, anti-vandal and lock out functions and a chlorination function. Single mixed feed connection with PEX lined hose (15mm connection).  
Spout projection: 180mm


AT03-051	Short pillar tap
<b>Mandatory Accessories:</b>	
AT00-221	Single station anti-microbial mains kit
AC17-047	TMV3
<b>Complimentary Accessories:</b>	
SD01-003	Pillar soap dispenser (chrome)
SW00-066	Rectangular Langley countertop basin
SW00-067	Circular Langley countertop basin
AT00-133	Unrestricted ABS antimicrobial flow straightener



KWC DVS washrooms


# Taps and spouts

No wet testing  
in compliance  
with NHS  
Estates Technical  
Bulletin (NETB)  
No.2024/3




**F3E BIB TAP**  
F3E bib tap DN 15 wall-mounted & sensor operated. For connection to pre-mixed hot or cold water. Control electronics, solenoid valve cartridge, 6V lithium battery (CR-P2) all housed in the high-polished chromium-plated brass tap body. Hygiene flushing 24 hours after last activation, safety cut-out and saving of statistical data. Flow rate at 3 bar: 6.0 l/min.  
Dimensions: 50 x 50 x 210mm

<b>F3EV1004</b>	F3E bib tap
<b>Mandatory Accessories:</b>	
<b>AC17-047</b>	TMV3
<b>Complimentary Accessories:</b>	
<b>SD01-001</b>	Wall-mounted soap dispenser (chrome)



**F3S SELF-CLOSING BIB TAP**  
F3S self-closing bib tap DN 15 for wall mounting for sanitary facilities. Self-closing cartridge, hydraulically controlled, piston-free design, self-closing, stepless adjustment of flow duration. For connection to pre-mixed hot water or cold water. Casing, high-polished chromium-plated brass.  
Flow rate at 3 bar: 3.0 l/min.  
Spout projection: 100mm

<b>F3SV1102</b>	F3S self-closing bib tap
<b>Mandatory Accessories:</b>	
<b>AC17-047</b>	TMV3
<b>Complimentary Accessories:</b>	
<b>SD110</b>	Wall-mounted soap dispenser



**SELF-CLOSING SINGLE-MIXER FOR FITTING UNIT OR WALL**  
F5S-Mix Self-closing single-mixer DN 15 with angled outlet for installation on fitting units or separate wall flanges, for sanitary facilities. FRAMIC self-closing mixing cartridge, hydraulically controlled, low-maintenance and stagnation-free, with ceramic disc technology, automatic closing, flow pressure independent due to medium-independent design. Continuously adjustable flow duration. With adjustable, turn-proof temperature stop. For connection to hot and cold water. All-metal construction, high-polished chrome-plated brass. Anti-theft aerator, SLIM design, with integrated flow regulator 5.0 l/min. Connections positioned above one another with backflow preventers.


<b>F5SM1011</b>	F5S self-closing bib tap
<b>Mandatory Accessories:</b>	
<b>ACXM1002</b>	Wall flange
<b>ACXM1003</b>	Single clamping bridge
<b>ACXM1004</b>	Double clamping bridge
<b>Complimentary Accessories:</b>	
<b>ACXX1002</b>	5.0 l/min aerator, angle-adjustable
<b>ASXX1008</b>	3.0 l/min. aerator





# Self-closing and anti-block outlets

No wet testing  
in compliance  
with NHS  
Estates Technical  
Bulletin (NETB)  
No.2024/3

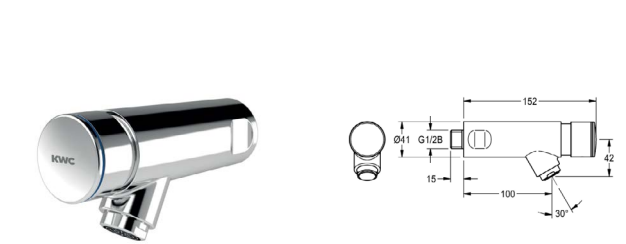


**F3S SELF-CLOSING BIB TAP**  
F3S self-closing DN 15 bib tap for sanitary facilities. Self-closing cartridge, hydraulically controlled, self-closing, adjustable flow duration. With anti-blocking system 2 (ABS2) for safety switch-off when permanently active. For connection to pre-mixed hot water or cold water. High-polished, chrome-plated brass housing. Aerator with an integrated flow rate controller 3.0 l/min.

**F3SV1005** F3S Bib tap  
**Mandatory Accessories:**  
**AC17-047** TMV3  
**Complimentary Accessories:**  
**SD01-001** Wall-mounted soap dispenser (chrome)




**F3S SELF-CLOSING BIB TAP WITH ANTI-BLOCK**  
F3S self-closing bib tap DN 15 with anti-twist protection for sanitary facilities. Especially suitable for facilities at risk of vandalism. Self-closing cartridge, hydraulically controlled, self-closing, adjustable flow duration and anti-blocking system 2 (ABS2) for safety switch-off in case of continuous operation. For connection to pre-mixed hot water or cold water. Rosette diameter 90 mm for visible front mounting, with anti-twist protection for bib tap and mounting material. All-metal construction, polished, chromium-plated brass. Anti-theft aerator with integrated flow regulator 6.0 l/min.

**F3SV1011** F3S Self-closing bib tap with anti-block  
**Complimentary accessories:**  
**SD300** Heavy duty wall-mounted soap dispenser

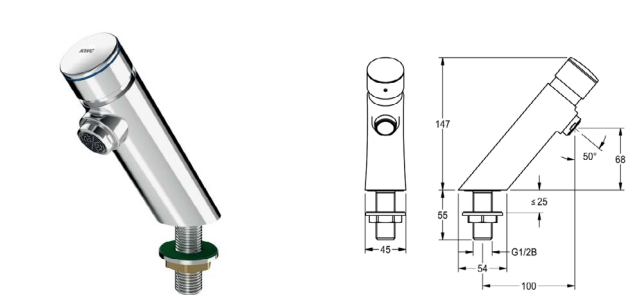


**F3S SELF-CLOSING PILLAR TAP WITH ANTI-BLOCK**  
F3S self-closing DN 15 pillar tap for sanitary facilities. Self-closing cartridge, hydraulically controlled, self-closing, stepless adjustment of flow duration. With anti-blocking system 2 (ABS2) for safety switch-off when permanently active. For connection to pre-mixed hot water or cold water. High-polished, chrome-plated brass housing. Aerator with an integrated flow rate controller 3.0 l/min.

**F3SV1004** F3S self-closing pillar tap with anti-block  
**Mandatory Accessories:**  
**AC17-047** TMV3  
**Complimentary Accessories:**  
**SD110** Wall-mounted soap dispenser

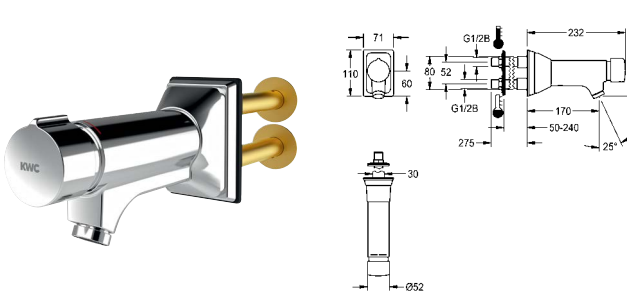


**SELF-CLOSING WALL-MOUNTED MIXER FOR REAR PANEL MOUNTING**  
F5S-Mix is a self-closing wall-mounted mixer with angled outlet, ideal for high-risk vandalism areas. It features FRAMIC self-closing mixer cartridge, ceramic disc technology, flow pressure-independent design, and adjustable temperature stop. It is made of polished, chromium-plated brass and comes with an anti-theft aerator with an integrated flow regulator. It can be connected to hot and cold water and is suitable for wall thicknesses from 50 to 240 mm.

**F5SM1012** Self-closing wall-mounted mixer  
**Complimentary accessories:**  
**SD300** Heavy duty wall-mounted soap dispenser

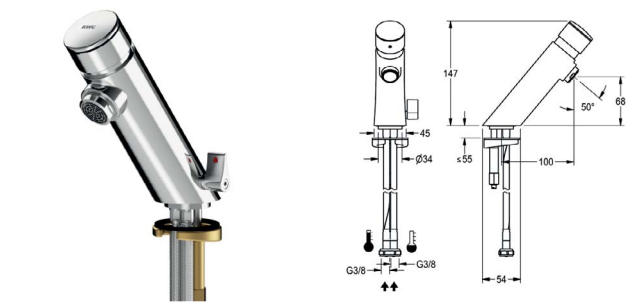

**F3S-MIX SELF-CLOSING PILLAR TAP WITH ANTI-BLOCK**  
F3S-Mix self-closing DN 15 pillar mixer for sanitary facilities. Selfclosing cartridge, hydraulically controlled, self-closing, stepless adjustment of flow duration. With anti-blocking system 2 (ABS2) for safety switch-off when permanently active. For connection to hot and cold water via hoses with integrated non-return valves and strainers. Temperature lever with an adjustable turn-proof temperature stop. High-polished, chrome-plated brass housing. Aerator with an integrated flow rate controller 3.0 l/min.

**F3SM1008** F3S Mix self-closing pillar mixer with anti-block  
**Complimentary Accessories:**  
**AC00-030** Soap dispenser - stainless steel  
**AC17-047** TMV3

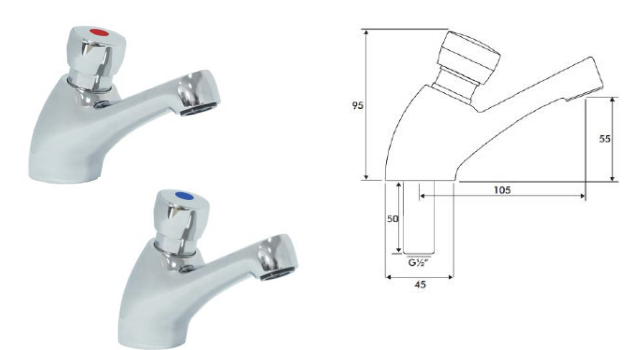


**NON CONCUSSIVE TAP**  
The basin mounted push tap is designed for use with our range of thermostatic mixing valves. With a simple, non-concussive operation and water saving technology, this tap is ideal for use in areas such as leisure and commercial washrooms. The simple operation of the push tap enables users with limited mobility to use the facility. Supplied with red and blue indicator options.

**MT00-030** Non concussive tap (single)  
**Complimentary Accessories:**  
**AC17-047** TMV3



C-Module: Bluetooth Connected

No wet testing  
in compliance  
with NHS  
Estates Technical  
Bulletin (NETB)  
No.2024/3

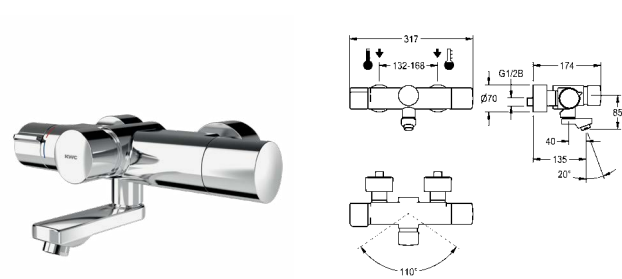


SELF-CLOSING THERMOSTATIC WALL-MOUNTED MIXER

F5S-Therm self-closing thermostat wall mixer DN 15 for wall mounting with lockable swivelling spout, for sanitary facilities. Hydraulically controlled, connects to hot water and cold water. With a pre-assembled hygiene unit including sensor with control electronics and 6 V lithium battery (CR-P2) for automatic hygiene flushing and storage of statistical data. FRAMIC self-closing cartridge, hydraulically controlled, low-maintenance and stagnation-free, with ceramic disc technology, self-closing, flow pressure-independent due to medium-separated design.

Stepless adjustment of flow duration. Thermostat with metal handle with adjustable and turn-proof temperature stop, with option for performance of manual thermal disinfection. Scald-protected, safe-touch housing, all-metal construction, high-polished chromium-plated brass. Laminar jet controller with integrated flow regulator 6.0 l/min. With adjustable and lockable connections with backflow preventer and strainers, completely covered with depth-adjustable screw rosettes. Projection 255 mm. Activated hygiene flushing, fixed interval of 24 hours. With option for parameterization and communication via optional, bidirectional remote control.

F5ST1004	135mm spout projection
F5ST1005	195mm spout projection
F5ST1006	255mm spout projection
Complimentary Accessories:	
ACEX9005	Bidirectional remote
ACEX9004	Two button remote

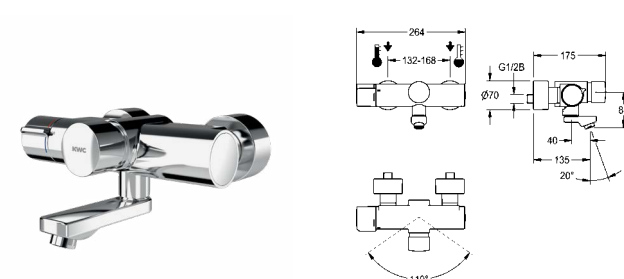


SELF-CLOSING THERMOSTATIC WALL-MOUNTED MIXER

F5S-Therm self-closing thermostat wall mixer DN 15 for wall mounting with lockable swivelling spout, for sanitary facilities. Hydraulically controlled, connects to hot water and cold water. With a pre-assembled hygiene unit including sensor with control electronics and 6 V lithium battery (CR-P2) for automatic hygiene flushing and storage of statistical data. FRAMIC self-closing cartridge, hydraulically controlled, low-maintenance and stagnation-free, with ceramic disc technology, self-closing, flow pressure-independent due to medium-separated design.

Stepless adjustment of flow duration. Thermostat with metal handle with adjustable and turn-proof temperature stop, with option for performance of manual thermal disinfection. Scald-protected, safe-touch housing, all-metal construction, high-polished chromium-plated brass. Laminar jet controller with integrated flow regulator 6.0 l/min. With adjustable and lockable connections with backflow preventer and strainers, completely covered with depth-adjustable screw rosettes. Projection 255 mm. Activated hygiene flushing, fixed interval of 24 hours. With option for parameterization and communication via optional, bidirectional remote control.

F5ST1101	135mm spout projection
F5ST1102	195mm spout projection
F5ST1103	255mm spout projection
Mandatory Accessories:	
ACST9002	Hygiene unit

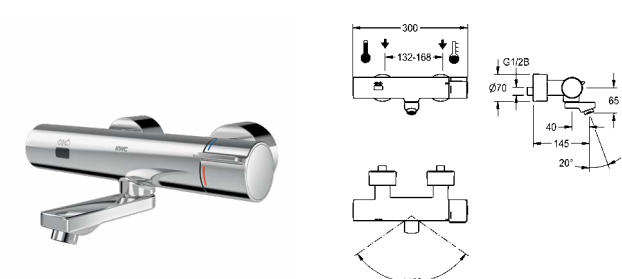


ELECTRONIC THERMOSTATIC WALL-MOUNTED MIXER WITH BATTERY OPERATION

F5E-Therm thermostatic mixer DN 15 for wall mounting with lockable swivelling outlet, for sanitary facilities. Opto-electronic control, activation on hand reflection. Thermostat with metal handle with adjustable, turn-proof temperature stop With the option of manual thermal disinfection. For connection to hot and cold water. Control electronics, solenoid valve cartridge, 6 V lithium battery (CR-P2) and sensor in all-metal housing, polished chromium-plated brass.

Laminar jet controller with integrated flow rate controller 6.0 l/min. With adjustable and lockable connections with backflow preventers and strainers, fully covered by depth-adjustable screw rosettes. 145 mm projection. Activated water hygiene flushing 24 hours after last activation, safety switch-off for continuous reflection and saving of statistical data. With facility for parameterisation and communication via optional bidirectional remote control or C-module unit with the necessary app.

F5ET1101	155mm spout projection
F5ET1102	215mm spout projection
F5ET1103	275mm spout projection
Mandatory accessories:	
ACET9003	C-module unit

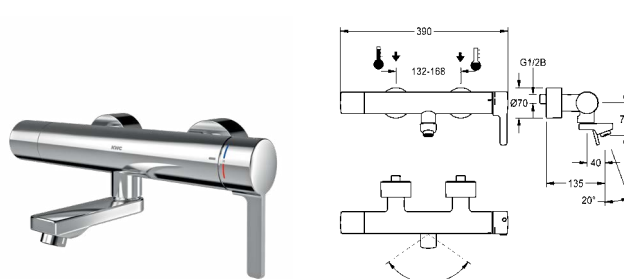

ELECTRONIC THERMOSTATIC WALL-MOUNTED MIXER WITH BATTERY OPERATION

F5E-Therm thermostatic mixer DN 15 for wall mounting with lockable swivelling outlet, for sanitary facilities. Opto-electronic control, activation on hand reflection. Thermostat with metal handle with adjustable, turn-proof temperature stop With the option of manual thermal disinfection. For connection to hot and cold water. Control electronics, solenoid valve cartridge, 6 V lithium battery (CR-P2) and sensor in all-metal housing, polished chromium-plated brass.

Laminar jet controller with integrated flow rate controller 6.0 l/min. With adjustable and lockable connections with backflow preventers and strainers, fully covered by depth-adjustable screw rosettes. 145 mm projection. Activated water hygiene flushing 24 hours after last activation, safety switch-off for continuous reflection and saving of statistical data. With facility for parameterisation and communication via optional bidirectional remote control or C-module unit with the necessary app.

F5LT1112	40mm spout projection
F5LT1113	100mm spout projection
F5LT1114	160mm spout projection





## Washbasins

Explore the durability and hygiene-focused design of KWC DVS washbasins - engineered to meet the strict demands of healthcare environments.

For high-traffic clinical areas, KWC DVS stainless steel washbasins and washtroughs offer exceptional strength and long-lasting performance. Their smooth surfaces are easy to disinfect, helping reduce infection risks while lowering long-term maintenance costs—perfect for hospitals, surgeries, and care facilities where reliability matters most.



KWC DVS washrooms

# Stainless steel washbasins



**ROUND 305MM RIMMED EDGE INSET WASHBASIN**

Round 305mm diameter rimmed edge wash basin. Manufactured from durable 1.2mm thick grade 1.4301 (304) stainless steel, it is built to last and provides a modern, minimalist aesthetic. The basin is prepared for a 32mm waste outlet and overflow for efficient drainage.

With no tap holes, this wash basin allows for flexible tap installation, either through the worktop or wall-mounted. It is supplied with fixing adhesive for easy installation. Please note, the waste kit is sold separately. Dimensions: 355 x 160 x 355mm

<b>D20140N</b>	Inset wash basin
<b>Mandatory accessories:</b>	
<b>F2117</b>	32mm waste, plug, chain and overflow
<b>Complimentary accessories:</b>	
<b>F6005</b>	Overflow stopper




**310MM INSET WASHBASIN WITH TAP LANDING**

The 310mm diameter inset wash basin is designed for mounting from either the top or underneath. Crafted from durable 1.2mm thick grade 1.4301 (304) stainless steel, with a satin finish. The basin is prepared for a 32mm waste outlet and includes an overflow hole. It features two tap holes on the rear ledge behind the bowl, making it suitable for basin taps only (deck mixers cannot be fitted). Supplied with fixing clips for easy inserting into worktops. Please note, the waste kit is sold separately.

Bowl Dimensions: 310 dia. x 160mm depth  
Dimensions: 400 x 138 x 400mm

<b>D20170N</b>	Inset wash basin
<b>Mandatory accessories:</b>	
<b>F2117</b>	32mm waste, plug, chain and overflow
<b>F1329N</b>	Lever basin taps
<b>F1080N</b>	Crosshead basin taps

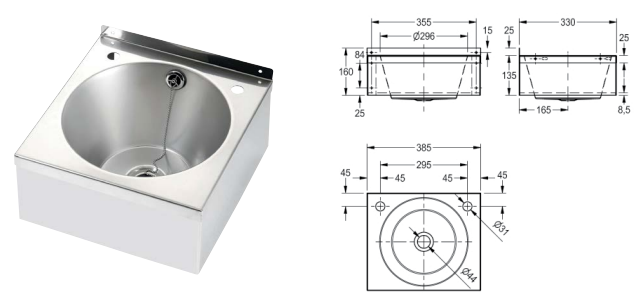


**MODEL B 290MM WALL-MOUNTED WASHBASIN WITH APRON**

The Model B 290mm diameter wall-mounted washbasin is crafted from 0.9mm thick grade 1.4301 (304) stainless steel with a high-polish finish for a sleek, durable look. Designed with a 32mm waste outlet and an integrated overflow, this basin is both practical and stylish.

It features two rear tap holes for convenient tap installation and is securely mounted using fixing holes in both the rear upstand and apron fixing brackets. Please note, screws and plugs are not included.

Dimensions: 340 x 185 x 345mm

<b>D20162N</b>	Wash basin
<b>Mandatory accessories:</b>	
<b>F1329N</b>	Lever basin taps
<b>F1080N</b>	Crosshead basin taps

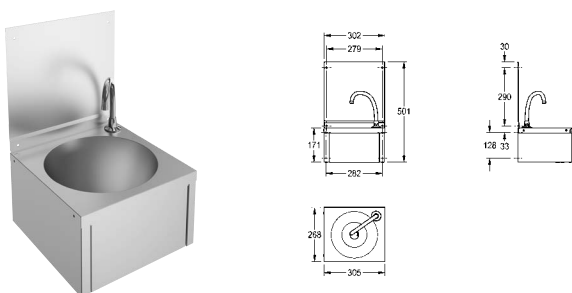


**ANIMA KNEE OPERATED WASHBASIN**

Knee-operated washbasin, manufactured from 0.9mm thick stainless steel with a satin polish finish, ensuring both durability and a clean, professional appearance. The basin is designed with a water spout positioned in the rear right-hand corner and includes a 32mm waste outlet. The washbasin comes complete with a pre-mixing valve and the pipework linking the water spout to the knee-operated front panel for easy installation. It is wall-mounted using a top joggle strip under the upstand return, with screw fixing through the integral rear brackets. Please note, screws and plugs are not supplied.

<b>ANMX212N</b>	338 x 535 x 343mm	<b>OR</b>
<b>ANMX216</b>	305 x 501 x 268mm	

Image and drawing illustrates ANMX216 version

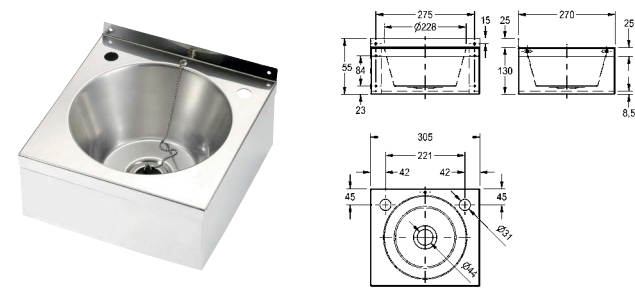


**MODEL A 240MM WALL-MOUNTED WASHBASIN WITH APRON**

The Model A 240mm diameter wall-mounted washbasin is made from 0.9mm thick grade 1.4301 (304) stainless steel, featuring a high-polish finish for a sleek and durable appearance. The basin is prepared for a 32mm waste outlet and includes two tap holes in the rear ledge, but does not have an overflow.

It is securely mounted using the fixing holes in both the rear upstand and the rear apron fixing brackets for added stability. Please note, screws and plugs are not included.

Dimensions: 290 x 157 x 290mm

<b>D20161N</b>	Wash basin
<b>Mandatory accessories:</b>	
<b>F1329N</b>	Lever basin taps
<b>F1080N</b>	Crosshead basin taps

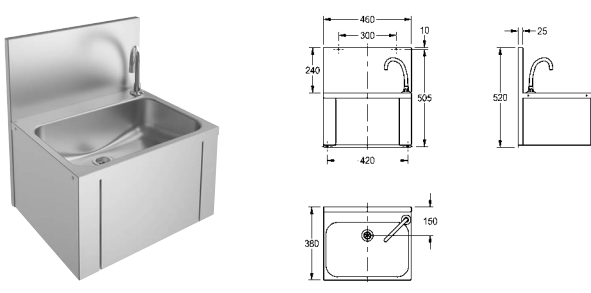

**ANIMA KNEE OPERATED WASHBASIN**

Knee-operated washbasin manufactured from high-quality stainless steel with a satin polish finish, offering both durability and a sleek, professional look. Constructed with a material thickness of 0.9mm, it is built to withstand frequent use. The basin is supplied complete with a water spout positioned in the rear right-hand corner and a 32mm waste outlet. Additionally, the pre-mixing valve and pipework linking the water spout to the knee-operated front panel are included.


For installation, the washbasin is wall-mounted using a top joggle strip under the upstand return and secured with screw fixings through the integral rear brackets. Please note that screws and plugs are not supplied.

<b>ANMX206</b>	420 x 520 x 380mm
----------------	-------------------



KWC DVS washrooms

Ceramic washbasins

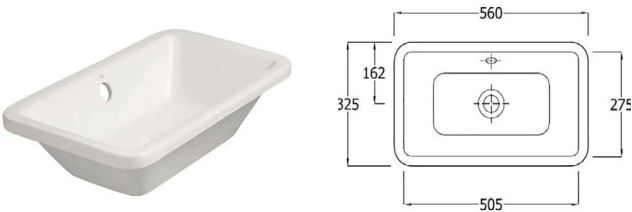

**MARDEN 560MM UNDERMOUNT BASIN**

Marden 560mm under mounted basin manufactured from Vitreous china with an alpine white finish. The basin rim is glazed, allowing this basin to be installed as an inset countertop basin. Requires external overflow adaptor.

Doc M, HBN & HTM Compliant  
Dimensions: 560 x 275 x 135mm

**SW00-093** Marden undermount basin

**Mandatory accessories:**

**SW00-044** 1 1/4" Plastic bottle trap

**SW00-049** 1 1/4" Strainer waste - unslotted **OR**

**SW00-050** 1 1/4" Press top waste - unslotted

**Complimentary accessories:**

**AT03-021** Aquarius 45° spout with With PEX hose



**LANGLEY 400MM UNDERMOUNT BASIN**

Langley 400mm under counter basin. Manufactured from Vitreous china with an alpine white finish. The basin rim is glazed allowing the basin to also be installed as an inset countertop basin. Requires an external overflow adaptor

Doc M, HBN & HTM Compliant  
Dimensions: 404 x 404 x 195mm

**SW00-092** Langley undermount basin

**Mandatory accessories:**

**SW00-044** 1 1/4" Plastic bottle trap

**SW00-049** 1 1/4" Strainer waste - unslotted **OR**

**SW00-050** 1 1/4" Press top waste - unslotted

**Complimentary accessories:**

**AT03-021** Aquarius 45° spout with With PEX hoses



**CHARTHAM 530 INSET BASIN**

Chartham 530mm countertop basin with central tap hole is the ideal addition to any modern washroom. Manufactured from Vitreous china with an alpine white finish. Complete with centre tap hole and waste.

Doc M, HBN & HTM Compliant  
Dimensions: 530 x 435 x 225mm

**SW00-114** Chartham inset basin


**Mandatory accessories:**

**SW00-044** 1 1/4" Plastic bottle trap

**SW00-049** 1 1/4" Strainer waste - unslotted

**Complimentary accessories:**

**AT03-021** Aquarius 45° spout with With PEX hoses

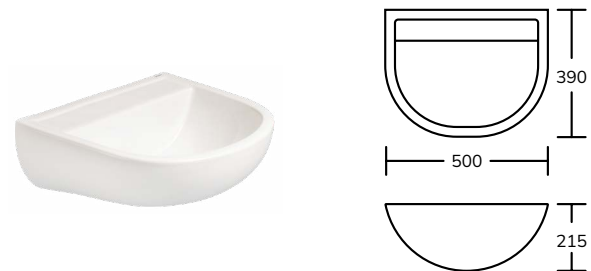

**WALL HUNG CLINICAL BASIN 500MM**

Clinical wall hung basin, manufactured from Vitreous china with an alpine white finish. Designed without tap holes and overflow. Back outlet for increased infection prevention.

HBN & HTM COMPLIANT  
Dimensions: 500 X 215 X 390mm

**SW00-042** Clinical basin

**SW00-045** Clinical basin right-hand tap hole

**Mandatory accessories:**

**SW00-044** 1 1/4" Plastic bottle trap

**SW00-043** Hangers and waste adaptor

INFORM



SMART WATER MANAGEMENT WITH KWC DVS INFORM


KWC DVS INFORM Outlets, crafted from high-grade 316 stainless steel, are designed for maximum durability and hygiene. Featuring antimicrobial properties and cutting-edge technology, they precisely monitor water temperatures at the point of discharge, ensuring real-time accuracy and enhanced safety.

Revolutionise your water management with INFORM—where safety, compliance, and efficiency come first.

Learn more today! [kwcdvsinform.gb@kwc.com](mailto:kwcdvsinform.gb@kwc.com)



30.57  
MONDAY FEB 20 19 59%

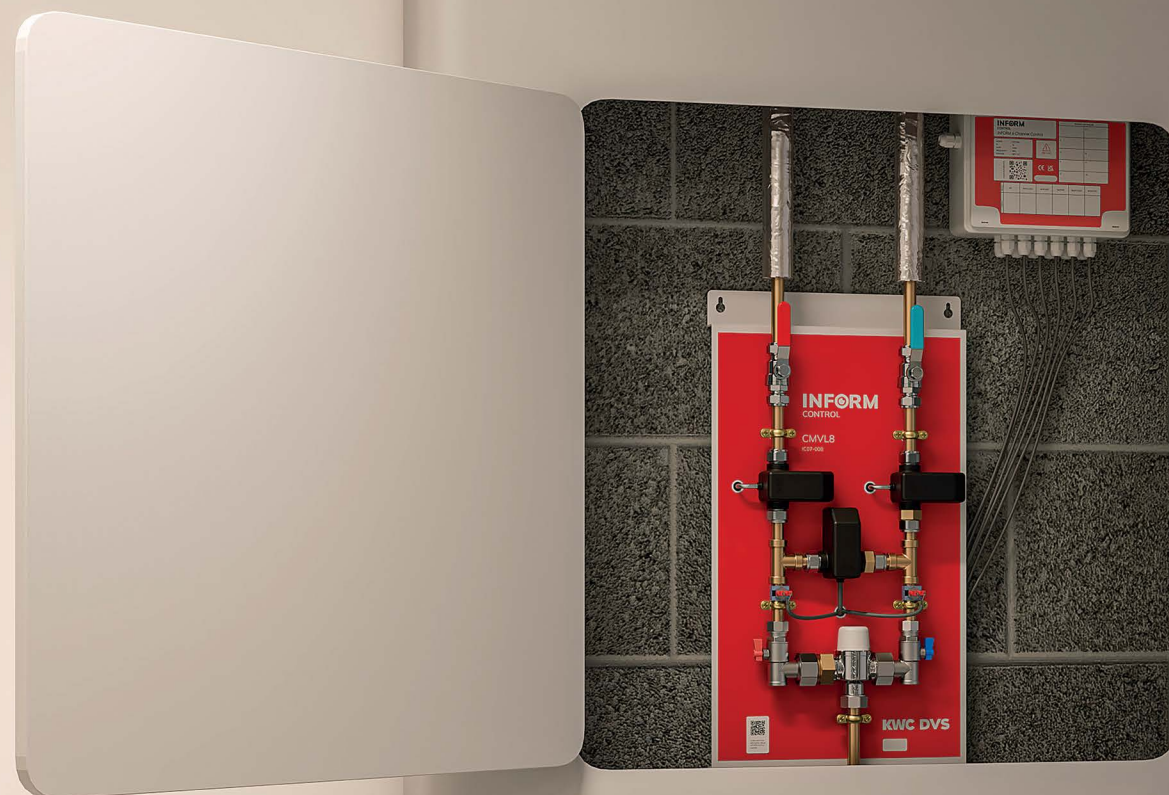

## Clinical outlets

The range of clinical outlets from KWC DVS has been designed to excel in healthcare settings where water hygiene is paramount.

With a focus on infection prevention, our TDV taps ensure peace of mind for facility managers, healthcare professionals, and users alike. Experience the confidence and benefits of using our thermal disinfection tap range.



Clinical outlet solutions

No wet testing  
in compliance  
with NHS  
Estates Technical  
Bulletin (NETB)  
No.2024/3



INFORM CLINICAL OUTLET

INFORM clinical outlet manufactured in 316 stainless steel with a brushed finish. The spout design features an anti-microbial outlet and in-built intelligent thermistor which connects to our INFORM water temperature monitoring device or CMVL8 hygiene flushing unit. Remotely monitor temperatures, control the outlet, thermal purges and fail safe checks all verified. 5 litres per minute integrated flow control. (other flow rates available).


IC03-052	INFORM Outlet A45 - for wall-mounted sensor
<b>Mandatory accesories:</b>	
IC07-006	INFORM 6 channel control box
IC07-017	INFORM programmable sensor
AC17-047	TMV3 (Not required with IC07-008)
<b>Complimentary accesories:</b>	
IC07-008	CMVL8 Control, monitor & verify
SW00-042	Wall hung clinical basin 500mm
SW00-045	Wall hung clinical basin 500mm Right-hand tap hole
SW00-043	Hangers & waste adaptor
SW00-044	1 1/4" Plastic bottle trap



MEDI-10 90° AUTOCLAVABLE SPOUT

Medi-10 Healthcare Spout™ manufactured in 316 stainless steel with a brushed finish. Designed for healthcare environments with a twist and lock wall-mounted spigot mechanism, the spout can easily be removed for servicing for minimal disruption. The spout has been designed to promote and maintain high levels of hygiene with an unrestricted outlet, smooth flow channels and easy to clean shape. The Medi-10 spout can also be autoclaved. Spout projection: 200mm


AT07-101	Medi-10 90° spout - Stainless steel
<b>Mandatory accesories:</b>	
AC02-017	Programmable sensor
AT00-221	Single anti-microbial station kit
AC17-047	TMV3
<b>Complimentary accesories:</b>	
SW00-042	Wall hung clinical basin 500mm
SW00-043	Hangers & waste adaptor
SW00-044	1 1/4" Plastic bottle trap

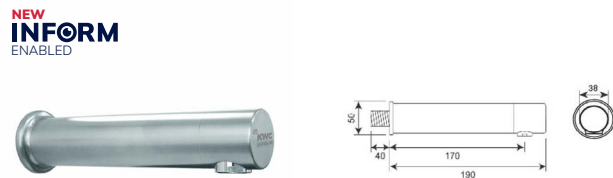

INFORM CLINICAL OUTLET

INFORM clinical outlet manufactured in 316 stainless steel with a brushed finish. The spout design features an anti-microbial outlet and in-built intelligent thermistor which connects to our INFORM water temperature monitoring device or CMVL8 hygiene flushing unit. Remotely monitor temperatures, control the outlet, thermal purges and fail safe checks all verified. 5 litres per minute integrated flow control. (other flow rates available).


IC02-048	INFORM Outlet 190mm - copper tails
IC02-049	INFORM Outlet 240mm - copper tails
<b>Mandatory accesories:</b>	
IC07-006	INFORM 6 channel control box
IC07-017	INFORM programmable sensor
AC17-047	TMV3 (Not required with IC07-008)
<b>Complimentary accesories:</b>	
IC07-008	CMVL8 Control, monitor & verify
SW00-042	Wall hung clinical basin 500mm
SW00-045	Wall hung clinical basin 500mm Right-hand tap hole
SW00-043	Hangers & waste adaptor
SW00-044	1 1/4" Plastic bottle trap

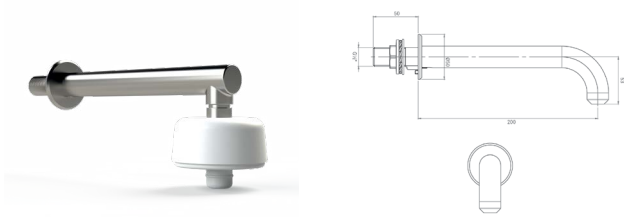

MEDI-10 90° SPOUT FOR POINT OF USE FILTER

Medi-10 Healthcare Spout™ manufactured in 316 stainless steel with a brushed finish. Designed for healthcare environments with a twist and lock wall-mounted spigot mechanism, the spout can easily be removed for servicing for minimal disruption. The spout has been designed to promote and maintain high levels of hygiene with an optional adaptor for point of use filters, smooth flow channels and easy to clean shape. The Medi-10 spout can also be autoclaved. Spout projection: 200mm


AT07-117	Medi-10 90° spout - Stainless steel
<b>Mandatory accesories:</b>	
AT00-044	Adaptor for filters - Medi-10
AC02-017	Programmable sensor
AT00-221	Single anti-microbial station kit
AC17-047	TMV3
<b>Complimentary accesories:</b>	
SW00-042	Wall hung clinical basin 500mm
SW00-043	Hangers & waste adaptor
SW00-044	1 1/4" Plastic bottle trap

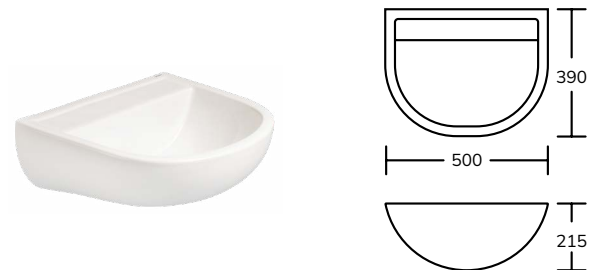

WALL HUNG CLINICAL BASIN 500MM

Clinical wall hung basin, manufactured from Vitreous china with an alpine white finish. Designed without tap holes and overflow. Back outlet for increased infection prevention.

HBN & HTM COMPLIANT Dimensions: 500 X 215 X 390mm	
SW00-042	Clinical basin
SW00-045	Clinical basin right-hand tap hole
<b>Mandatory accesories:</b>	
SW00-044	1 1/4" Plastic bottle trap
SW00-043	Hangers and waste adaptor

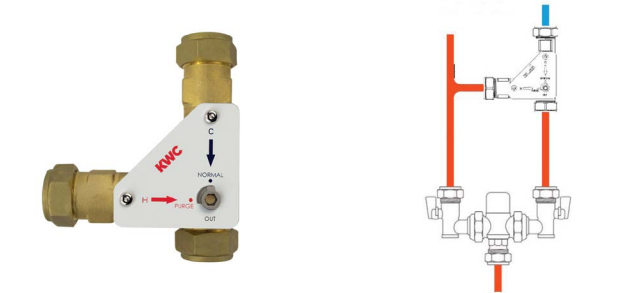

THERMAL DISINFECTION VALVE

The KWC DVS thermal disinfection valve has been designed to aid the prevention biofilm, reducing the risk of water-borne pathogens by allowing thermal disinfection from the TMV through to the outlet (1 x TDV is required per TMV). The valve is suitable for taps, showerheads and other washroom equipment fitted with a TMV.

Features include:  
Reduces risk of water-borne pathogens. Simple, single-quarter turn operation, Integral non-return valves to prevent backflow, Corrosion-resistant DZR brass body, Suitable for 22mm and 15mm pipework, Compliant with water regulations and by-laws and WRAS approved.

AC17-080	Thermal Disinfection Valve
----------	----------------------------





# INFORM

## OUTLET

INFORM Outlet provides a unique range of products that allow you remote, wireless control of solenoid valves & the ability to monitor both usage and temperatures. Inform provides full verification of data and events to ensure water safety and aid compliance.

With an easy to use online platform, detailed reports and an unrivalled range of Inform enabled taps, spouts, showers and clinical basins.

All from a UK business with more than 40 years experience in water management, water hygiene and temperature monitoring.


Full survey and installation service available by qualified KWC DVS engineers.



KWC DVS washrooms


# INFORM Outlet

No wet testing  
in compliance  
with NHS  
Estates Technical  
Bulletin (NETB)  
No.2024/3

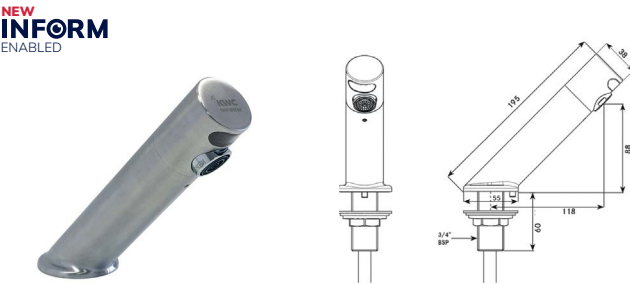


**INFORM OUTLET A45 - INTEGRATED SENSOR**  
INFORM Outlet manufactured in 316 stainless steel with a brushed finish. The spout design features an anti-microbial outlet and in-built intelligent thermistor which connects to our INFORM water temperature monitoring device. Remotely monitor temperatures, control the outlet, thermal purges and fail safe checks, all verified. 5 litres per minute integrated flow control. (other flow rates available).  
Outlet projection: 118mm.

IC03-012	INFORM Outlet - Integrated sensor
<b>Mandatory accessories:</b>	
IC10-066	INFORM Monitor Universal kit
AC17-047	TMV3
<b>Complimentary accessories:</b>	
SW00-045	Wall hung clinical basin 500mm RH tap hole
SW00-043	Hangers & waste adaptor
SW00-044	1 1/4" Plastic bottle trap

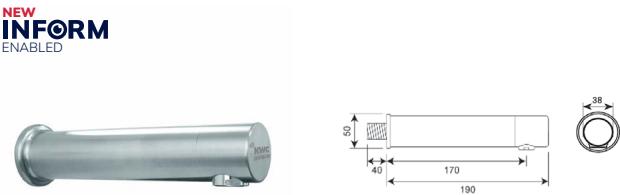


**INFORM OUTLET 190MM**  
INFORM clinical outlet manufactured in 316 stainless steel with a brushed finish. The spout design features an anti-microbial outlet and in-built intelligent thermistor which connects to our INFORM water temperature monitoring device or CMVL8 hygiene flushing unit. Remotely monitor temperatures, control the outlet, thermal purges -and fail safe checks, all verified. 5 litres per minute integrated flow control. (other flow rates available).  
Outlet projection: 170mm.

IC02-048	INFORM Outlet 190mm
<b>Mandatory accessories:</b>	
IC07-006	INFORM 6 channel control box
IC07-017	INFORM programmable sensor
AC17-047	TMV3 (Not required with IC07-008)
<b>Complimentary accessories:</b>	
IC07-008	CMVL8 Control, monitor & verify
SW00-042	Wall hung clinical basin 500mm
SW00-043	Hangers & waste adaptor
SW00-044	1 1/4" Plastic bottle trap

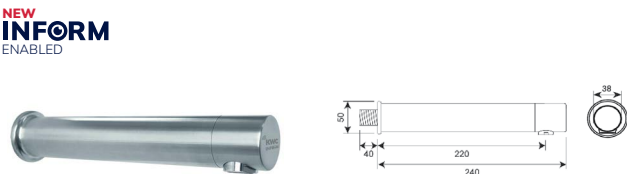


**INFORM OUTLET 240MM**  
INFORM clinical outlet manufactured in 316 stainless steel with a brushed finish. The spout design features an anti-microbial outlet and in-built intelligent thermistor which connects to our INFORM water temperature monitoring device or CMVL8 hygiene flushing unit. Remotely monitor temperatures, control the outlet, thermal purges and fail safe checks, all verified. 5 litres per minute integrated flow control. (other flow rates available).  
Outlet projection: 220mm.

IC02-049	INFORM Outlet 240mm
<b>Mandatory accessories:</b>	
IC07-006	INFORM 6 channel control box
IC07-017	INFORM programmable sensor
AC17-047	TMV3 (Not required with IC07-008)
<b>Complimentary accessories:</b>	
IC07-008	CMVL8 Control, monitor & verify
SW00-042	Wall hung clinical basin 500mm
SW00-043	Hangers & waste adaptor
SW00-044	1 1/4" Plastic bottle trap

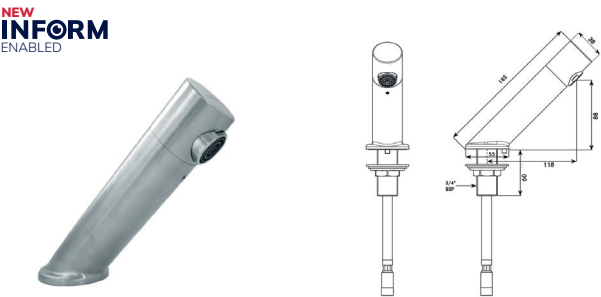


**INFORM OUTLET A45 - WALL-MOUNTED SENSOR**  
INFORM Outlet manufactured in 316 stainless steel with a brushed finish. The spout design features an anti-microbial outlet and in-built intelligent thermistor which connects to our INFORM water temperature monitoring device. Remotely monitor temperatures, control the outlet, thermal purges and fail safe checks, all verified. 5 litres per minute integrated flow control. (other flow rates available).  
Outlet projection: 118mm.

IC03-052	INFORM Outlet A45 - wall-mounted sensor
<b>Mandatory accessories:</b>	
IC07-006	INFORM 6 channel control box
IC07-017	INFORM programmable sensor
AC17-047	TMV3 (Not required with IC07-008)
<b>Complimentary accessories:</b>	
IC07-008	CMVL8 Control, monitor & verify
SW00-045	Wall hung clinical basin 500mm Right-hand tap hole
SW00-043	Hangers & waste adaptor
SW00-044	1 1/4" Plastic bottle trap

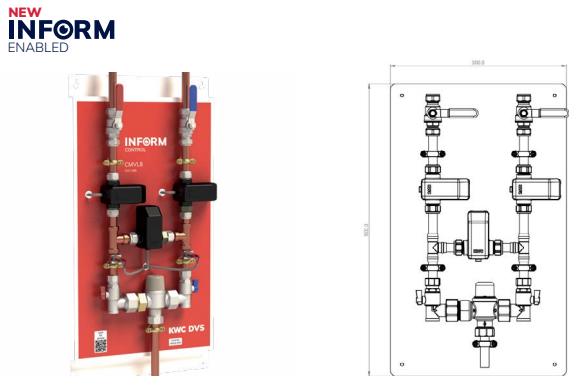

**CMVL8 CONTROL, MONITOR & VERIFY**  
The CMVL8 is designed to work in conjunction with the Inform enabled Multi Channel control boxes. Complete with full bore 15mm compression isolation valves, check valves, anti-microbial solenoid valves, temperature sensors and a separate thermostatic mixing valve ready for easy installation.  
CMVL8 allows you to carry out Thermal purges through both the outlet & TMV and cold water isolation tests without the need to remove IPS panels or manually operate valves. CMVL8 will also provide detailed, reports with date & time, temperatures etc. to ensure you have the information you need to effectively manage the safety of your water system.  
In addition INFORM can provide verification that hot taps are ≥ 50°C (55°C in healthcare premises), and cold taps are below 20°C within the times required by HSG274 Part 2.

IC07-008	CMVL8 Control, monitor & verify
<b>Mandatory accessories:</b>	
IC07-006	INFORM 6 channel control box
IC07-017	INFORM programmable sensor

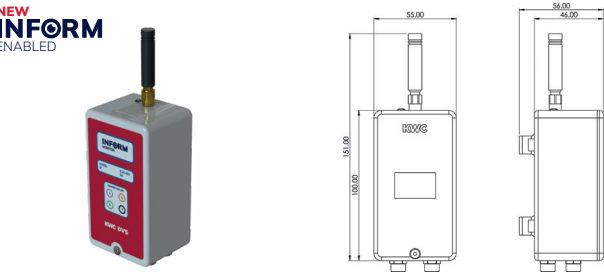

**INFORM MONITOR UNIVERSAL KIT**  
INFORM Monitor tracks water system temperatures from anywhere in the world. Analyse trends and pinpoint areas for improvement. Make data-driven decisions to optimise efficiency and prioritise upgrades.  
Universal kit suitable for any part of your water system. Kit includes all parts required to monitor temperatures.  
Kit includes:  
1 x INFORM Monitor device  
4 x Intelligent thermistors for 15mm pipework  
4 x Intelligent thermistors for 22mm pipework  
4 x Thermistor cables  
1 x 1st year subscription

IC10-066	INFORM Monitor Universal kit
<b>Complimentary accessories:</b>	



KWC DVS

# INFORM Outlet

KWC DVS INFORM Outlets, crafted from high-grade 316 stainless steel, are designed for maximum durability and hygiene. Featuring antimicrobial properties and cutting-edge technology, they precisely monitor water temperatures at the point of discharge, ensuring real-time accuracy and enhanced safety.


Revolutionise your water management with INFORM - where safety, compliance, and efficiency come first.



## Thermal Purge

Our INFORM intelligent outlets are equipped with an advanced Thermal Purge function designed to support infection control and Legionella prevention. This feature enables automated high-temperature flushing through the outlet, effectively killing bacteria and reducing the risk of biofilm build-up within pipework.

Thermal purges can be programmed at set intervals or triggered on-demand, ensuring water systems remain safe—especially during periods of infrequent use. With accurate temperature monitoring and full logging via our INFORM platform, facilities can maintain compliance with HTM and HSG274 guidelines while optimising water safety management.

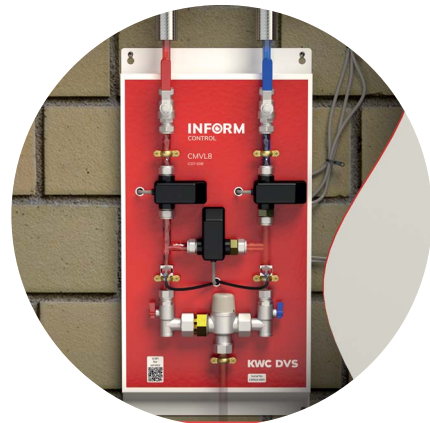

## Built-In Failsafe Function for Enhanced Safety

Our INFORM outlets, when used in conjunction with the CMVL8 control box, are equipped with a robust failsafe mechanism to ensure user safety in high-risk environments. In the event of a cold water supply failure, the system automatically shuts off the hot water flow at the Thermostatic Mixing Valve (TMV), preventing any hot water from reaching the outlet.

This critical feature eliminates the risk of scalding, ensuring that water will not flow from the spout unless safe mixing conditions are met. Designed for environments where safety is paramount—such as secure healthcare, mental health, and custodial facilities—this failsafe protection offers peace of mind and compliance with stringent safety standards.



## Integrated Thermistor Technology for Enhanced Safety and Control

Each INFORM outlet is equipped with an integrated thermistor that continuously monitors water temperature in real time. This built-in sensor allows for precise temperature control and rapid response to any fluctuations, helping to maintain safe and consistent water delivery. In secure and sensitive environments such as mental health or custodial settings, this feature plays a vital role in preventing scalding and enhancing overall user safety, while also supporting efficient thermal disinfection and system diagnostics when used with our CMVL8 control box.

**INFORM**  
OUTLET






KWC DVS washrooms

# Configure your ultimate clinical wash station with INFORM

Choose from INFORM Outlet, INFORM Control and our HBN compliant clinical washbasin for a complete solution.



INFORM Outlet & basin RHT  
IC03-052 A45  
SW00-045 Basin RHT  
SW00-044 Bottle trap  
SW00-043 Hangers




INFORM Control  
IC07-008 CMVL8  
IC07-006 6CH Controller  
AC01-001 Programmer



Antibacterial IPS Panel  
MEDI-10 IPS panel



INFORM Outlet & basin  
IC02-048 190mm  
SW00-042 Basin  
SW00-044 Bottle trap  
SW00-043 Hangers




INFORM Control  
IC07-008 CMVL8  
IC07-006 6CH Controller  
AC01-001 Programmer



Antibacterial IPS Panel  
MEDI-10 IPS panel



MEDI-10 Outlet & basin  
AT07-101 MEDI-10 Outlet  
SW00-042 Basin  
SW00-044 Bottle trap  
SW00-043 Hangers



INFORM Control  
IC07-008 CMVL8  
IC07-006 6CH Controller  
AC01-001 Programmer



Antibacterial IPS Panel  
MEDI-10 IPS panel



## CMVL8 - CONTROL, MONITOR, VERIFY

Wirelessly Control thermal purges & TMV cold water isolation tests.

Remotely monitor the time taken for hot and cold water outlets to achieve temperatures.

Verify all relevant data with granular reports. Control, Monitor & Verify your water system is safe and compliant.







## Scrub up troughs

Infection control is non-negotiable in healthcare settings and surgeon scrub-up troughs play a pivotal role in maintaining a sterile environment.

Stainless steel's non-porous surface prevents the accumulation of contaminants, and the ergonomic design ensures efficient water drainage, reducing the risk of stagnant water and potential bacterial growth. The result is a tool that safeguards patients and medical staff alike.



# Surgeon scrub up troughs


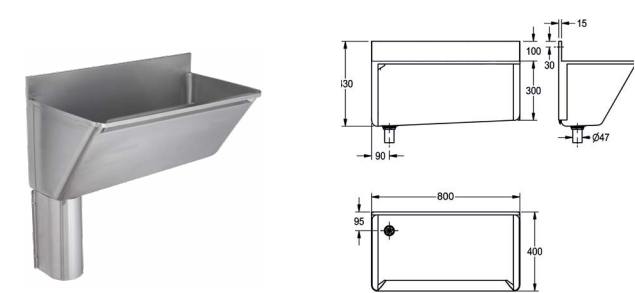


**800MM SUH SURGEONS SCRUB UP TROUGH - LEFT-HAND**

Manufactured from 1.5mm thick grade 1.4301 (304) stainless steel, with a satin finish. The surgeon scrub up trough is supplied with a conventional waste outlet in the base of the trough and shroud to cover pipework. The top and bottom areas of the trough are fixed to the wall using the joggle strips supplied. Please note - wall fixing screws and plugs are not supplied. Manufactured in accordance with HTM 64/HBN 00-10, Part C Standards.

Mounting: Surface mounted  
Outlet: Left-hand outlet  
Dimensions: 800 x 400mm

**G22029LN** 800mm Scrub up trough left-hand  
**Mandatory accessory:**  
**F2068** 38mm flush grated waste


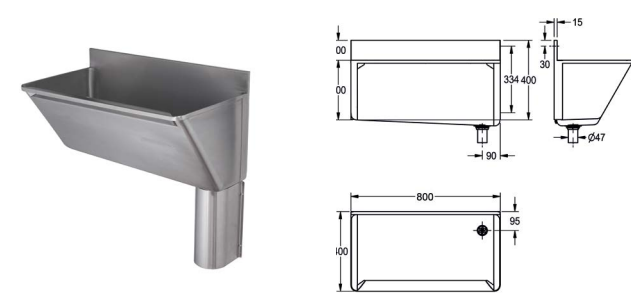


**800MM SUH SURGEONS SCRUB UP TROUGH - RIGHT-HAND**

Manufactured from 1.5mm thick grade 1.4301 (304) stainless steel, with a satin finish. The surgeon scrub up trough is supplied with a conventional waste outlet in the base of the trough and shroud to cover pipework. The top and bottom areas of the trough are fixed to the wall using the joggle strips supplied. Please note - wall fixing screws and plugs are not supplied. Manufactured in accordance with HTM 64/HBN 00-10, Part C Standards.

Mounting: Surface mounted  
Outlet: Right-hand outlet  
Dimensions: 800 x 400mm

**G22029RN** 800mm Scrub up trough right-hand  
**Mandatory accessory:**  
**F2068** 38mm flush grated waste


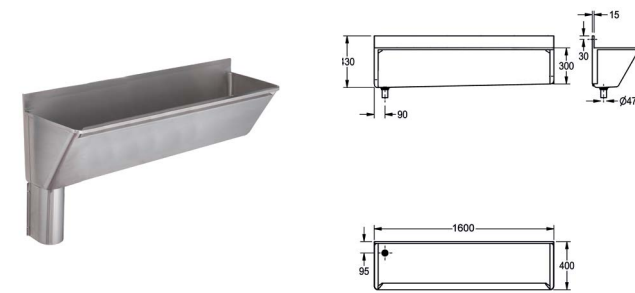


**1600MM SUH SURGEONS SCRUB UP TROUGH - LEFT-HAND**

Manufactured from 1.5mm thick grade 1.4301 (304) stainless steel, with a satin finish. The surgeon scrub up trough is supplied with a conventional waste outlet in the base of the trough and shroud to cover pipework. The top and bottom areas of the trough are fixed to the wall using the joggle strips supplied. Please note - wall fixing screws and plugs are not supplied. Manufactured in accordance with HTM 64/HBN 00-10, Part C Standards.

Mounting: Surface mounted  
Outlet: Left-hand outlet  
Dimensions: 1600 x 400mm

**G22030LN** 1600mm Scrub up trough left-hand  
**Mandatory accessory:**  
**F2068** 38mm flush grated waste


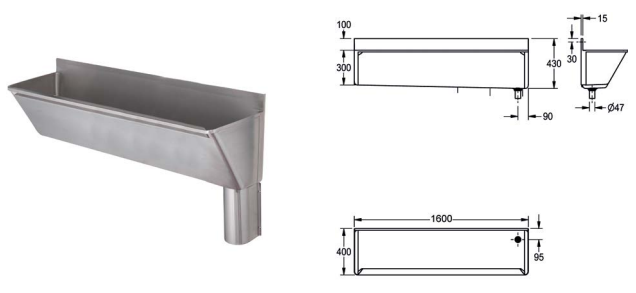


**1600MM SUH SURGEONS SCRUB UP TROUGH - RIGHT-HAND**

Manufactured from 1.5mm thick grade 1.4301 (304) stainless steel, with a satin finish. The surgeon scrub up trough is supplied with a conventional waste outlet in the base of the trough and shroud to cover pipework. The top and bottom areas of the trough are fixed to the wall using the joggle strips supplied. Please note - wall fixing screws and plugs are not supplied. Manufactured in accordance with HTM 64 / HBN 00-10, Part C Standards.

Mounting: Surface mounted  
Outlet: Right-hand outlet  
Dimensions: 1600 x 400mm

**G22030RN** 1600mm Scrub up trough right-hand  
**Mandatory accessory:**  
**F2068** 38mm flush grated waste

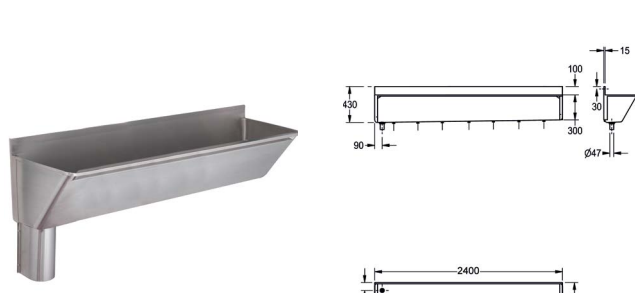


**2400MM SUH SURGEONS SCRUB UP TROUGH - LEFT-HAND**

Manufactured from 1.5mm thick grade 1.4301 (304) stainless steel, with a satin finish. The surgeon scrub up trough is supplied with a conventional waste outlet in the base of the trough and shroud to cover pipework. The top and bottom areas of the trough are fixed to the wall using the joggle strips supplied. Please note - wall fixing screws and plugs are not supplied. Manufactured in accordance with HTM 64 / HBN 00-10, Part C Standards.

Mounting: Surface mounted  
Outlet: Left-hand outlet  
Dimensions: 2400 x 400mm

**G22031LN** 2400mm Scrub up trough left-hand  
**Mandatory accessory:**  
**F2068** 38mm flush grated waste



**2400MM SUH SURGEONS SCRUB UP TROUGH - RIGHT-HAND**

Manufactured from 1.5mm thick grade 1.4301 (304) stainless steel, with a satin finish. The surgeon scrub up trough is supplied with a conventional waste outlet in the base of the trough and shroud to cover pipework. The top and bottom areas of the trough are fixed to the wall using the joggle strips supplied. Please note - wall fixing screws and plugs are not supplied. Manufactured in accordance with HTM 64 / HBN 00-10, Part C Standards.

Mounting: surface mounted  
Outlet: Right-hand outlet  
Dimensions: 2400 x 400mm

**G22031RN** 2400mm Scrub up trough right-hand  
**Mandatory accessory:**  
**F2068** 38mm flush grated waste



KWC DVS washrooms

# Configure your ultimate clinical wash station with INFORM

Choose from INFORM Outlet, INFORM Control and our HBN compliant clinical washbasin for a complete solution.



+



+



Scrub trough

AT07-101 MEDI-10 Outlet  
G22029LN Scrub trough  
F2068 Flush grated waste

INFORM Control

IC07-008 CMVL8  
IC07-006 6CH Controller  
AC01-001 Programmer

Antibacterial IPS Panel

MEDI-10 IPS panel



+



+



Scrub trough

2 x AT07-101 MEDI-10 Outlet  
G22030LN Scrub trough  
F2068 Flush grated waste

INFORM Control

2 x IC07-008 CMVL8  
IC07-006 6CH Controller  
AC01-001 Programmer

Antibacterial IPS Panel

MEDI-10 IPS panel



+



+



Scrub trough

3 x AT07-101 MEDI-10 Outlet  
G22031LN Scrub trough  
F2068 Flush grated waste

INFORM Control

3 x IC07-008 CMVL8  
2 x IC07-006 6CH Controller  
AC01-001 Programmer

Antibacterial IPS Panel

MEDI-10 IPS panel







## Medical and utility sinks

Medical and utility sinks play a vital role in maintaining hygiene and functionality across public and semi-public healthcare settings—from small clinics to large hospital estates.


This versatile range supports both new build and refurbishment projects, with all products designed in accordance with HBN and HTM guidelines to ensure regulatory compliance.

The collection includes janitorial units, bucket sinks, dirty utility (DUHS) sinks, clinical hand wash basins, and general utility sinks—each tailored to meet the specific demands of healthcare environments. Manufactured from high-grade stainless steel, these sinks offer exceptional durability, easy maintenance, and long-term performance, supporting infection control protocols throughout the building's operational life.



KWC DVS washrooms

# Cleaning and janitorial

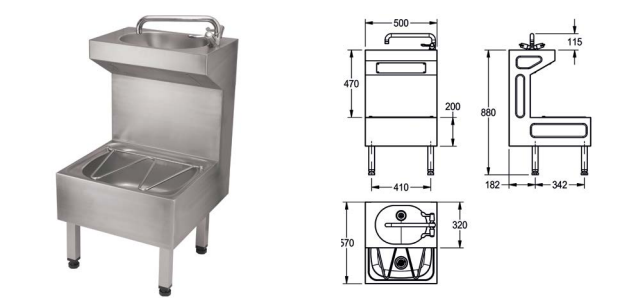


**HEALTHCARE COMPLIANT JANITORIAL UNIT**

Manufactured from 1.2mm thick, grade 1.4301 (304) stainless steel (except for lower bowl - 0.9mm). Supplied complete with lever operated monobloc mixer. With copper tails, 32mm flush grated waste outlet for top wash bowl and 38mm domed waste (for lower bowl). The janitorial unit can be fixed with 4 legs for floor standing or part wall hung / floor standing by using two of the front legs or alternatively the unit can be fitted as a wall hung unit by using the joggle strip provided. Manufactured in accordance with HTM 64/HBN 00-10, Part C Standards.

Tap: Monobloc mixer  
Without overflow  
Dimensions: 500 x 995 x 570mm

<b>G20055N</b>	Janitorial unit
<b>Complimentary accessories:</b>	
<b>G20051N</b>	Combination waste kit

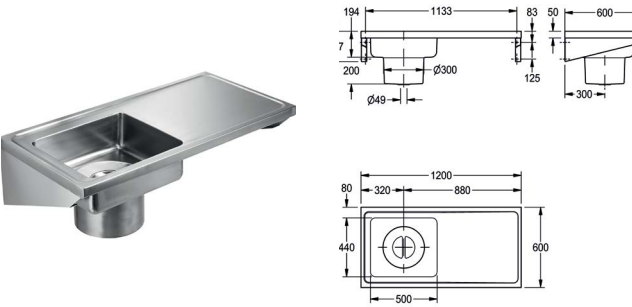


**PLASTER SINK**

Manufactured from 1.2mm thick grade 1.4301 (304) stainless steel, with a satin finish (bowl - 1.5mm). The single bowl incorporates a plaster catcher sump, which is prepared for a 38mm waste (waste sold separately). An integral sump with a removable stainless steel basket prevents loose plaster from entering the waste and causing a blockage. Designed without tap holes, therefore taps should be wall-mounted. Stainless steel cantilever brackets and stainless steel front leg supports can be supplied as an extra, no wall fixing are supplied. Manufactured in accordance with HTM 64/HBN 00-10, Part C Standards.

Bowl dimensions: 500 x 400 x 200/400mm  
Dimensions: 1200 x 600mm

<b>G22000LN</b>	Left-hand drainer
<b>G22000RN</b>	Right-hand drainer
<b>Mandatory accessories:</b>	
<b>F2068</b>	Flush grated waste 1 1/2"
<b>G26523L/R</b>	Stainless steel cantilever bracket left/right
<b>OR</b>	
<b>G26524L/R</b>	Stainless steel front leg support left/right

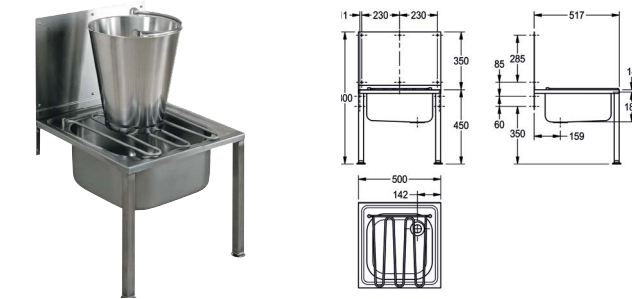

**STAINLESS STEEL FLOOR STANDING BUCKET SINK**

Manufactured from 1.2mm thick, grade 1.4301 (304) stainless steel. Designed with splash back, hinged grating, 38mm BSP waste fitting and complete with integral wall brackets. The bucket sink is supported on two front legs and is held in position by screwing the two integral wall brackets directly to the wall. Screws and wall plugs are not supplied. Stainless steel bucket is not included.

Dimensions: 500 x 800 x 517mm

<b>G21663N</b>	Bucket sink
<b>Complimentary accessories:</b>	
<b>F1071/3N</b>	Pair of bib taps




**SISSONS DUH HOSPITAL DISPOSAL UNIT**

DUH hospital disposal unit manufactured from 1.2mm thick, grade 304 stainless steel with a satin polish finish. Includes a 110mm diameter outlet sluice hopper which can accept a P or S trap (available as an extra). The unit should only be fed from a cistern or tank water supply. Mounted on either stainless steel cantilever brackets or front leg supports with adjustable feet, which give a working height of 900mm. Manufactured in accordance with HTM 64/HBN 00-10, Part C Standards.

Dimensions: 1,000 x 600 x 900mm

<b>G22016L</b>	Left-hand drainer for duct mounted cistern
<b>G22016R</b>	Right-hand drainer for duct mounted cistern
<b>G22025L</b>	Left-hand drainer for exposed cistern
<b>G22025R</b>	Right-hand drainer for exposed cistern
<b>Mandatory and complimentary accessories listed below</b>	

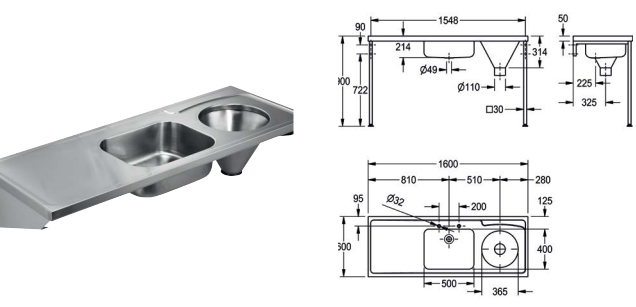

**DUHS HOSPITAL DISPOSAL UNIT**

A DUHS hospital disposal unit manufactured from stainless steel with a satin polish finish. The top is turned down on all four edges and incorporates a wet area recess. Fitted with a 110mm diameter outlet sluice hopper at one end which can accept a P or S trap (available as an extra). The unit should only be fed from a cistern or tank water supply. Mounted on either stainless steel cantilever brackets or front leg supports with adjustable feet, which give a working height of 900mm. Manufactured in accordance with HTM 64/HBN 00-10, Part C Standards.

Without tap holes or overflow  
Dimensions: 1600 x 900 x 600mm

<b>G22018L</b>	Left-hand drainer for duct mount cistern
<b>G22018R</b>	Right-hand drainer for duct mount cistern
<b>G22027L</b>	Left-hand drainer for exposed cistern
<b>G22027R</b>	Right-hand drainer for exposed cistern

**Mandatory and complimentary accessories listed below**

**DUH & DUHS ACCESSORIES FOR DUCT MOUNT**

**Mandatory accessories:**

<b>G26523L</b>	Stainless steel cantilever bracket left
<b>G26523R</b>	Stainless steel cantilever bracket right
<b>OR</b>	
<b>G26524L</b>	Stainless steel front leg support left
<b>G26524R</b>	Stainless steel front leg support right

<b>B4042</b>	P-trap plastic waste
<b>F3018</b>	9 litre plastic cistern
<b>B3022</b>	Plastic down pipe
<b>F2055</b>	Cistern pull chain & lever

**For DUHS only optional:**

<b>F2068</b>	Flush grated waste 1 1/2"
<b>G26542N</b>	Grating for DUHS

**DUH & DUHS ACCESSORIES FOR SURFACE MOUNT**

**Mandatory accessories:**

<b>G26523L</b>	Stainless steel cantilever bracket left
<b>G26523R</b>	Stainless steel cantilever bracket right
<b>OR</b>	
<b>G26524L</b>	Stainless steel front leg support left
<b>G26524R</b>	Stainless steel front leg support right


<b>B4052</b>	P-trap stainless steel waste
<b>G20605N</b>	9 litre stainless steel cistern
<b>B4215</b>	Stainless steel down pipe
<b>F2055</b>	Cistern pull chain & lever

**For DUHS only optional:**

<b>F2068</b>	Flush grated waste 1 1/2"
<b>G26542N</b>	Grating for DUHS



# Cleaning and janitorial



INSET WASH BASIN WITH TAP LANDING

Manufactured from 0.9mm thick grade 1.4301 (304) stainless steel. Prepared with a 32mm centre waste outlet and overflow hole and a rear ledge with two tap holes suitable for either basin taps or mixer taps. Supplied with fixing clips for inseting into worktops. Waste kit is available as an extra. Finish: Descaled

Bowl dimensions: 410 x 265 x 140mm  
Dimensions: 472 x 390 x 140mm


**D20168N** Inset washbasin

**Mandatory accessories:**

**F2117** 32mm waste, plug, chain and overflow

**Complimentary accessories:**

**F1074N** 3mm high neck lever taps



SK1 WALL-MOUNTED SINGLE BOWL SINK

Manufactured from 1.2mm thick, grade 1.4301 (304) stainless steel with a satin polish finish. The sink top is turned down on all four edges and incorporates a wet area recess. The bowl is prepared for a 38mm waste outlet and the sink top can either be mounted on wall brackets or front leg supports (sold separately). NOTE: It is not possible to fit an overflow. Manufactured in accordance with HTM 64 / HBN 00-10, Part C Standards.

Bowl dimensions: 500 x 400 x 200mm  
Dimensions: 600 x 600 x 218mm

**G22002N** Without tap holes

**G22002NT** Tap holes: 2 at 200mm centres

**Mandatory accessories:**

**F2068** 38mm flush grated waste


**G26523L/R** Stainless steel cantilever bracket left/right

**OR**

**G26524L/R** Stainless steel front leg support left/right

**Complimentary accessories:**

**F1074N** 3mm high neck lever taps




CLEANERS SINK WITH GRID FOR WALL MOUNTING

Manufactured from 1.5mm thick, grade 1.4301 (304) stainless steel with a satin finish. Designed with a seamlessly welded bowl with rounded edges. Incorporates 38mm plug waste with a plastic overflow pipe, drainage back left, 30mm rear up-stand. Supplied with stainless steel grid with rubber bumps, stainless steel screws and dowels.

Bowl dimensions: 370 x 160 x 340mm  
Dimensions: 500 x 160 x 500mm

**WB500GV** Cleaners sink with grid for wall mounting




WALL-MOUNTED CLEANERS SINK WITH GRID

Manufactured from grade 1.4301 (304) stainless steel, material thickness 0.9mm, with splash back, hinged grating, 38mm BSP waste fitting and complete with an integral wall bracket.

Cleaners sink  
Mounting: Wall-mounted  
Bowl dimensions: 436 x 190 x 300mm  
Dimensions: 436 x 490 x 339mm

**WB440COP-UK** Cleaners sink



DISPOSAL UNIT FOR SURFACE MOUNTED CISTERNS

Manufactured from 1.2mm thick, grade 1.4301 (304) stainless steel with a satin finish. Incorporates a sluice hopper with a back inlet suitable for wall mounting. The hopper is designed with a 110mm diameter outlet, which can accept a P trap (sold separately). The unit should only be fed from a cistern or tank water supply. 6, 7 or 9 litre steel cisterns are available as extras. These are fitted with a 13mm HP brass valve, plastic float and CP metal flushing lever handles. The unit is fixed to the wall using two cantilever brackets and wall fixings (sold separately)

Sluice dimensions: 375/110 x 300mm  
Dimensions: 670 x 300 x 600mm

**G22043N** Disposal unit - surface mounted cisterns

**Mandatory accessories:**

**G26523L/R** Stainless steel cantilever bracket left/right

**G26524L/R** Stainless steel front leg support left/right

**OR**


**Complimentary accessories:**

**B4052** 110mm stainless steel adjustable P trap

**G26542N** Stainless steel removable outlet grating 110mm

**G20605N** 9 litre stainless steel cistern

**B4215** Stainless steel downpipe



DISPOSAL UNIT FOR DUCT MOUNTED CISTERNS

Manufactured from 1.2mm thick, grade 1.4301 (304) stainless steel with a satin finish. Incorporates a sluice hopper with a back inlet suitable for duct mounting. The hopper is designed with a 110mm diameter outlet, which can accept a P trap (sold separately). The unit should only be fed from a cistern or tank water supply. A duct mounted 9 litre plastic cistern is available separately, this is supplied with a plastic downpipe, plastic float and metal flushing lever handles. The unit is fixed to the wall using two cantilever brackets and wall fixings (sold separately). Manufactured in accordance with HTM 64/HBN 00-10, Part C Standards.

Dimensions: 600 x 300 x 600mm

**G22041N** Disposal unit - duct mounted cisterns

**Mandatory accessories:**

**G26523L/R** Stainless steel cantilever bracket left/right

**G26524L/R** Stainless steel front leg support left/right

**OR**


**Complimentary accessories:**

**B4042** White plastic P trap for hospital units

**G26542N** Stainless steel removable outlet grating 110mm

**F3018** 9 litre plastic cistern

**B3022** Plastic downpipe



DISPOSAL UNIT FOR DUCT MOUNTED CISTERNS

Manufactured from 1.2 mm thick, grade 1.4301 (304) stainless steel with a satin polish finish. Incorporating a sluice hopper which is suitable for duct mounted services. The hopper has a 110 mm diameter outlet which can accept a P trap (available as an extra). A duct mounted 9 litre plastic cistern with plastic downpipe, plastic float and metal flushing lever handles is available. The unit should only be fed from a cistern or tank water supply. The unit is fixed to the floor and the wall via the service duct.

Sluice hopper size 375/110 x 300 mm (W x H x D)  
Dimensions 600 x 600 x 600 mm (W x H x D)

**G22020N** Disposal unit - back inlet for duct mounted cisterns

**Complimentary accessories:**

**B4042** White plastic P trap for hospital units


**F3018** 9 litre plastic cistern

**B3022** Plastic downpipe




KWC DVS washrooms


# HBN compliant sinks




G22048L/R

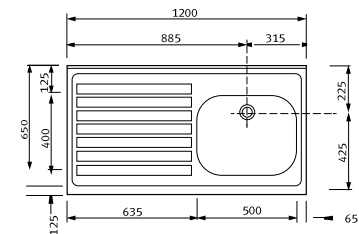

G22049L/R

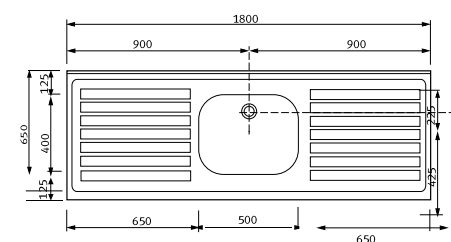

G22052N

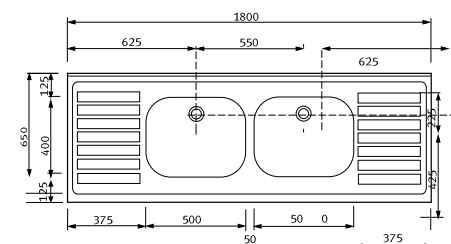

G22053N

**SIT ON SINKS WITH RADIUSED FRONT EDGE**

A range of sinks manufactured from 1.2mm thick, grade 1.4301 (304) stainless steel, satin polish finish. Each sink profile incorporates a radiused front edge together with a radiused internal corner at the base of the upstand. All sink bowls are prepared for a 38mm waste outlet, which can be supplied as an extra.

All the sink units are suitable for mounting onto cabinets, front leg supports or cantilevered brackets - see recommended listed below.

External Dimensions: 1000 x 650 x 220mm

<b>G22048L</b>	Single bowl, left-hand drainer, no tap holes
<b>G22048R</b>	Single bowl, right-hand drainer, no tap holes
<b>G22048LT</b>	Single bowl, left-hand drainer, with 2 tapholes at 200mm centres
<b>G22048RT</b>	Single bowl, right-hand drainer, with 2 tapholes at 200mm centres

External Dimensions: 1200 x 650 x 220mm

<b>G22049L</b>	Single bowl, left-hand drainer, no tap holes
<b>G22049R</b>	Single bowl, right-hand drainer, no tap holes
<b>G22049LT</b>	Single bowl, left-hand drainer, with 2 tapholes at 200mm centres
<b>G22049RT</b>	Single bowl, right-hand drainer, with 2 tapholes at 200mm centres

External Dimensions: 1800 x 650 x 220mm

<b>G22052N</b>	Single bowl, double drainer, no tapholes
<b>G22053N</b>	Double bowl, double drainer, no tapholes
<b>G22052NT</b>	Single bowl, double drainer, with 2 tapholes at 200mm centres
<b>G22053NT</b>	Double bowl, double drainer, with 2 tapholes at 200mm centres

Mandatory for all

<b>F2068</b>	38mm CP brass flush grated waste outlet
--------------	---

Complimentary front leg supports and brackets

<b>G26523L</b>	Stainless steel cantilever bracket left and
<b>G26523R</b>	Stainless steel cantilever bracket right
<b>G26524L</b>	Stainless steel front leg support left and
<b>G26524R</b>	Stainless steel front leg support right

Complimentary for all units with 2 tapholes

<b>F1074N</b>	13mm high necked lever operated taps
<b>F1075N</b>	13mm mixer lever tap

Complimentary for all units with no tapholes

<b>F4LT1024</b>	F4LT-MED thermostatic single lever mixer
<b>AT02-022</b>	Aquarius 250mm with copper tails

**Manufactured in accordance with the Health Building Notes (HBN 00-10, Part C) standards**

# INFORM

OUTLET

Take control of your water system and accurately monitor the temperature at the outlet 24/7. Integrate with INFORM Monitor and INFORM Control to have the management information you need and ensure you have a safe water system.

With fully configurable alarms, audit trails, detailed reports and much more.

Get in touch for more information and to arrange a FREE trial:


[kwcdvssales@kwc.com](mailto:kwcdvssales@kwc.com)





KWC DVS washrooms

# HBN compliant sinks

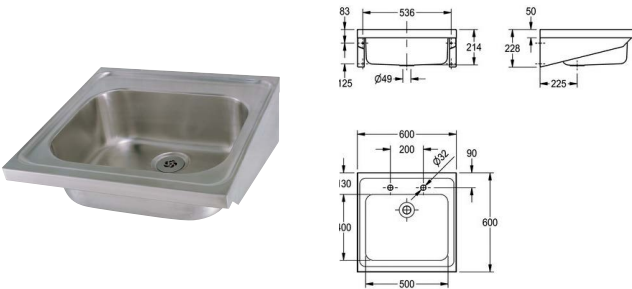


**SK1 WALL-MOUNTED SINGLE BOWL SINK**

Manufactured from 1.2mm thick, grade 1.4301 (304) stainless steel with a satin polish finish. The sink top is turned down on all four edges and incorporates a wet area recess. The bowl is prepared for a 38mm waste outlet and the sink top can either be mounted on wall brackets or front leg supports (sold separately). NOTE: It is not possible to fit an overflow. Manufactured in accordance with HTM 64 / HBN 00-10, Part C Standards.

Without overflow  
Bowl dimensions: 500 x 400 x 200mm  
Dimensions: 600 x 600 x 218mm

<b>G22002N</b>	Without tap holes
<b>G22002NT</b>	Tap holes: 2 at 200mm centres
<b>Mandatory accessories:</b>	
<b>F2068</b>	38mm flush grated waste
<b>G26523L/R</b>	Stainless steel cantilever bracket left/right
<b>G26524L/R</b>	Stainless steel front leg support left/right
<b>OR</b>	
<b>Complimentary accessories:</b>	
<b>F1074N</b>	3mm high neck lever taps

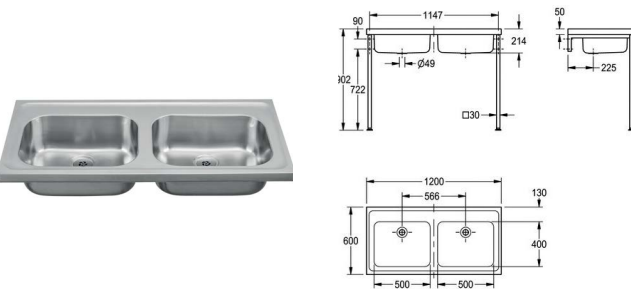

**SK2 WALL-MOUNTED DOUBLE BOWL SINK**

Manufactured from 1.2mm thick, grade 1.4301 (304) stainless steel with a satin polish finish. The sink top is turned down on all four edges and incorporates a wet area recess. The bowls are prepared for a 38mm waste outlet and the sink top can either be mounted on wall brackets or front leg supports (sold separately). Manufactured to HTM 64 / HBN 00-10, Part C Standards.

Wall-mounted  
Without tap holes and without overflow  
Bowl dimensions: 500 x 400 x 200mm  
Dimensions: 1200 x 600 x 218mm

<b>G22004N</b>	Double bowl sink
<b>Mandatory accessories:</b>	
<b>F2068</b>	38mm flush grated waste
<b>G26523L/R</b>	Stainless steel cantilever bracket left/right
<b>G26524L/R</b>	Stainless steel front leg support left/right
<b>OR</b>	




**STA SINGLE BOWL, SINGLE DRAINER SIT ON SINK**

Manufactured from 1.2mm thick, grade 1.4301 (304) stainless steel with a satin polish finish. This sink top is turned down on all four edges and incorporates a wet area recess. The bowl is prepared for a 38mm waste outlet and the sink top can either be mounted on wall brackets or front leg supports (sold separately). Manufactured to HTM 64 / HBN 00-10, Part C Standards.

Without tap holes and without overflow  
Bowl dimensions: 500 x 400 x 200mm  
Dimensions: 1200 x 600 x 218mm

<b>G22006L</b>	With left-hand drainer
<b>G22006R</b>	With right-hand drainer
<b>Mandatory accessories:</b>	
<b>F2068</b>	38mm flush grated waste
<b>G26523L/R</b>	Stainless steel cantilever bracket left/right
<b>G26524L/R</b>	Stainless steel front leg support left/right
<b>OR</b>	

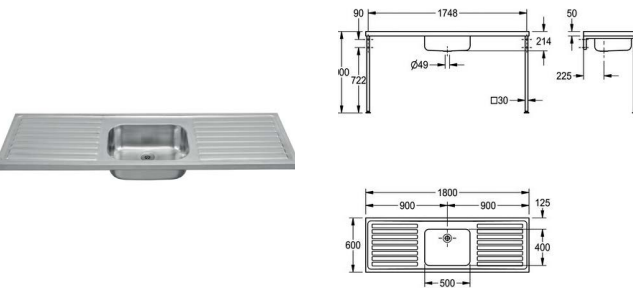


**STB SINGLE BOWL, DOUBLE DRAINER SIT ON SINK**

Manufactured from 1.2mm thick, grade 1.4301 (304) stainless steel with a satin polish finish. The sink top is turned down on all four edges and incorporates a wet area recess. The bowl is prepared for a 38mm waste outlet and the sink top can either be mounted on wall brackets or front leg supports (sold separately). Designed without tap holes, therefore any taps to be fitted must be mounted onto the wall. Manufactured to HTM 64 / HBN 00-10, Part C Standards.

Without tap holes and without overflow  
Bowl dimensions: 500 x 400 x 200mm  
Dimensions: 1800 x 600 x 218mm

<b>G22008D</b>	Single bowl sink
<b>Mandatory accessories:</b>	
<b>F2068</b>	38mm flush grated waste
<b>G26523L/R</b>	Stainless steel cantilever bracket left/right
<b>G26524L/R</b>	Stainless steel front leg support left/right
<b>OR</b>	

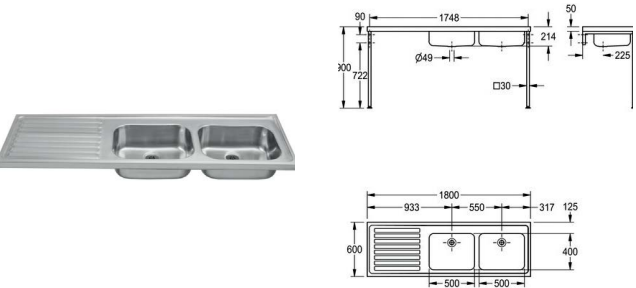


**STC DOUBLE BOWL, SINGLE DRAINER SIT ON SINK**

Manufactured from 1.2mm thick, grade 1.4301 (304) stainless steel with a satin polish finish. The sink top is turned down on all four edges and incorporates a wet area recess. The bowls are prepared for a 38mm waste and requires three brackets or three front leg supports (sold separately). NOTE: It is not possible to fit an overflow. Designed without tap holes, therefore any taps to be fitted must be mounted onto the wall. Manufactured to HTM 64 / HBN 00-10, Part C Standards.

Without tap holes and without overflow  
Bowl dimensions: 500 x 400 x 200mm  
Dimensions: 1800 x 600 x 218mm

<b>G22010L</b>	With left-hand drainer
<b>G22010R</b>	With right-hand drainer
<b>Mandatory accessories:</b>	
<b>F2068</b>	38mm flush grated waste
<b>G26523L/R</b>	Stainless steel cantilever bracket left/right
<b>G26524L/R</b>	Stainless steel front leg support left/right
<b>OR</b>	

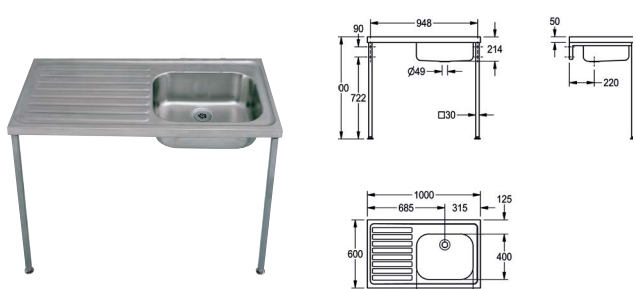


**SINGLE BOWL, SINGLE DRAINER SIT ON SINK**

Manufactured from 1.2mm thick, grade 1.4301 (304) stainless steel with a satin polish finish. The sink top is turned down on all four edges and incorporates a wet area recess. The bowl is prepared for a 38mm waste outlet and the sink top can either be mounted on wall brackets or front leg supports (sold separately). Manufactured to HTM 64 / HBN 00-10, Part C Standards.

Drainer: Left/Right-hand drainer available  
Without tap holes and without overflow  
Bowl dimensions: 400 x 400 x 180mm  
Dimensions: 1000 x 600 x 220mm

<b>G22045L</b>	With left-hand drainer
<b>G22045R</b>	With right-hand drainer
<b>Mandatory accessories:</b>	
<b>F2068</b>	38mm flush grated waste
<b>G26523L/R</b>	Stainless steel cantilever bracket left/right
<b>G26524L/R</b>	Stainless steel front leg support left/right
<b>OR</b>	

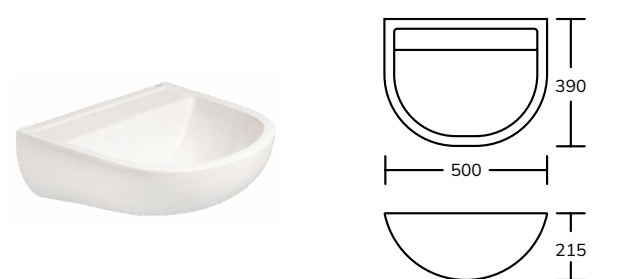

**WALL HUNG CLINICAL BASIN 500 MM**

Clinical wall hung basin, manufactured from Vitreous china with an alpine white finish. Designed without tap holes and overflow. Back outlet for increased infection prevention.

HBN & HTM Compliant  
Dimensions: 500 x 215 x 390 mm

<b>SW00-042</b>	Clinical basin
<b>Mandatory accessories:</b>	
<b>SW00-044</b>	1 1/4" Plastic bottle trap
<b>SW00-043</b>	Hangers and waste adaptor





## Urinals


KWC DVS offers a comprehensive range of urinal bowls and troughs, manufactured in durable vitreous china and robust stainless steel—materials selected for their long-lasting performance and suitability in high-traffic, hygiene-critical environments.

Enhance infection control and user experience with intelligent flush systems, including touch-free programmable sensors and smart flush controls designed to reduce water waste while promoting optimal hygiene.

Explore the F5 Smart Urinal Flushing System—a cutting-edge solution that uses a single central ceiling sensor to control up to 20 urinals, simplifying installation and ensuring consistent, efficient flushing performance across healthcare washroom facilities.




Urinals



MARDEN CERAMIC URINAL

Concealed trap single urinal, manufactured from high-quality vitreous china to BS 340. For use with a back inlet spreader and concealed cistern feed. HBN / HTM compliant urinal bowl. Dimensions: 310 x 560 x 300mm

SW00-036	Ceramic urinal
<b>Mandatory accessories:</b>	
SW00-037	Urinal spreader
SW00-039	Domed urinal waste
SW00-040	P trap
SW00-041	Plastic elbow
<b>Complimentary accessories:</b>	
SW00-038	Ceramic urinal divider




CENTINEL URINAL TROUGHS - CONCEALED SPARGE

Centinel wall-mounted urinals with concealed sparge pipe. Manufactured from 1.2mm thick grade 1.4301 (304) stainless steel with a satin polish finish. Designed with the waste outlet positioned centrally within the urinal. Supplied complete with a 50mm waste, concealed sparge pipes, sparge pipe cover, interconnecting pipework, plastic cistern, downpipe and trap cover. The recommended height for fixing the cisterns is 750 - 950mm, from the underside of the cistern to the top return of the urinal. All urinals are screw fixed to the wall through fixing holes in the top flange together with separate wall-mounted brackets which support the base of the unit.

Dimensions: 555 x 300mm

CEN120C	1200mm wide urinal
CEN150C	1500mm wide urinal
CEN180C	1800mm wide urinal
CEN240C	2400mm wide urinal
<b>Complimentary accessories:</b>	
UC01-017	Flushmatic urinal control wall-mounted - mains OR
UC01-024	Flushmatic urinal control ceiling mounted - mains




CHARTHAM EXPOSED TRAP URINAL BOWL

Exposed trap urinal, manufactured from high-quality vitreous china to BS 340. Designed to be installed with either a back inlet spreader for concealed cistern feed or top inlet spreader for exposed cistern feed. Sleek easy to clean design with exposed bottle trap, can be mounted at a lower height.

Dimensions: 355 x 445 x 330mm

SW00-080	Exposed urinal
<b>Mandatory accessories:</b>	
SW00-081	Hanging brackets
SW00-082	Plastic resealing bottle trap
SW00-039	Domed waste
SW00-083	Top Inlet urinal spreader OR
SW00-037	Back inlet urinal spreader
<b>Complimentary accessories:</b>	
SW00-038	Ceramic urinal divider




CENTINEL URINAL TROUGHS - EXPOSED SPARGE

Centinel wall-mounted urinals with exposed sparge pipe. Manufactured from 1.2mm thick grade 1.4301 (304) stainless steel with a satin polish finish. Designed with the waste outlet positioned centrally within the urinal. Supplied complete with a 50mm waste, exposed sparge pipes, sparge pipe cover, interconnecting pipework, plastic cistern and downpipe. The recommended height for fixing the cisterns is 750 - 950mm, from the underside of the cistern to the top return of the urinal. All urinals are screw fixed to the wall through fixing holes in the top flange together with separate wall-mounted brackets which support the base of the unit.

Dimensions: 555 x 300mm

CEN120E	1200mm wide urinal
CEN150E	1500mm wide urinal
CEN180E	1800mm wide urinal
CEN240E	2400mm wide urinal
<b>Complimentary accessories:</b>	
UC01-017	Flushmatic urinal control wall-mounted - mains OR
UC01-024	Flushmatic urinal control ceiling mounted - mains




LANGLEY CONCEALED TRAP URINAL BOWL

Concealed trap urinal bowl, manufactured from high-quality vitreous china to BS 340. Sleek, easy to clean design with concealed bottle trap.

HBN / HTM compliant urinal bowl  
Dimensions: 375 x 645 x 350mm

SW00-084	Concealed urinal
<b>Mandatory accessories:</b>	
SW00-085	Back inlet spreader
SW00-086	Urinal fixings
SW00-039	Domed urinal waste
SW00-040	P trap
SW00-041	Plastic elbow
<b>Complimentary accessories:</b>	
SW00-038	Ceramic urinal divider



CAMPUS URINAL POD

CAMPUS wall-mounted urinal made of 304 chromium-nickel steel, satin finished surface, bowl material thickness 1.2mm, shroud 0.9mm, oval bowl shape, stainless steel spreader with G 1/2 connecting hose, punched strainer waste, including DN 40 siphon, mounting strip and mounting material.

Dimensions 313 x 627 x 342mm

CMPX539P	Stainless steel urinal
<b>Complimentary accessories:</b>	
CMPX560	Stainless steel urinal divider
CMPX136	Urinal installation frame



# Control up to 20 urinals with one F5 smart urinal sensor

**F5 SMART urinal sensors**

Public toilet facilities with high footfall pose major challenges for planners and operators in terms of hygiene and cleanliness. Absolute reliability of the products used has the highest priority, especially for urinal systems.

The F5 Smart urinal sensor is ideally suited to these requirements and is now not only available for ceramic urinals but also for single and row urinals made of stainless steel.

With the help of central room monitoring, the sensor mounted on the ceiling ensures that urinals are flushed automatically after each use. The sensor registers the users presence in the room solely on the basis of physical parameters, i.e. without a camera function.



The "Smart Urinal" app is available for commissioning and controlling the Smart Urinal Sensor. It also enables other functions to be programmed.

**Intelligent, central control**

With the F5 Smart Urinal Flushing System, you only need a single central ceiling sensor to control up to 20 urinals. Our advanced technology ensures optimal flushing performance whilst simplifying your setup.


The system involves a central room monitoring setup where sensors are mounted on the ceiling. These sensors communicate wirelessly with Smart Urinal Units installed behind the urinals, triggering automatic flushing after each use. The F5 Smart Urinal Sensor is designed for both single and row urinals and can be installed in urinals made of stainless steel or ceramic materials.





KWC DVS washrooms

# Intelligent urinal controls

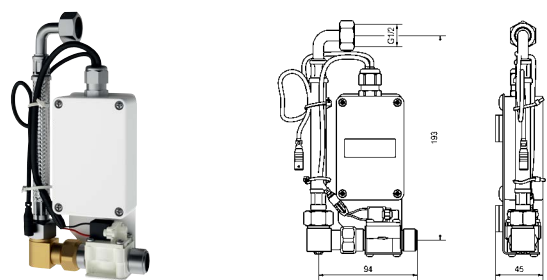


**F5 SMART URINAL UNIT FOR GREY WATER FED SINGLE URINAL - BOWL MOUNTED**

F5 smart urinal unit for installation behind a single urinal made of CMPX539 stainless steel. Water path pre-assembled with hose for water connection, locking and solenoid valve. Control unit in a sealed plastic box for wireless communication with the F5 smart urinal sensor. Either for battery operation with 6V lithium battery (CR-P2) per control unit or separate power supply via power supply unit 6.75V/12V DC.

Battery compartment including battery or power supply unit with extension cable must be ordered separately.

<b>ACEF3003</b>	F5 Smart urinal bowl mount - grey water
<b>Mandatory accessories:</b>	
<b>ACEX9010</b>	Extension cable 5m
<b>F5EF3009 (black) OR F5EF3008 (white)</b>	F5 Smart urinal sensor
<b>ACEX9023 (battery) OR ACEX9001 (mains)</b>	Power supply

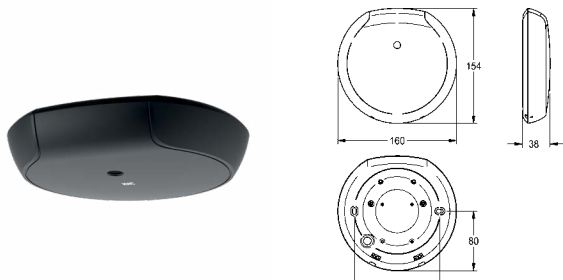


**F5 SMART URINAL SENSOR BLACK**

The F5 Smart Urinal Sensor offers central, ceiling-mounted control for room-wide urinal flushing. It enables touch-free and simultaneous user detection, wirelessly triggering flushing programs for up to 20 connected F5 urinal units. The sensor's coverage area adjusts based on ceiling height, while hygiene flushes activate 24 hours after the last use to maintain cleanliness. Data logging and program adjustments are accessible via an app on Bluetooth®-enabled devices with Android 7 or iOS 11, enabling easy commissioning, program selection, and unit-specific settings.

Dimensions: 160 x 154 x 38mm  
Connection voltage 110–240 V AC, 50/60 Hz  
Area covered 5 x 2.5m at ceiling height 3m

<b>F5EF3009</b>	F5 Smart urinal sensor black
<b>F5EF3008</b>	F5 Smart urinal sensor white
<b>Mandatory accessories:</b>	
<b>ACEF3004</b>	F5 Smart urinal duct mount
<b>ACEF3003</b>	F5 Smart urinal bowl mount

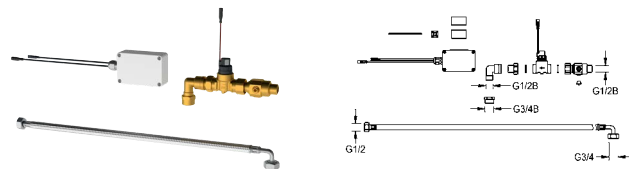


**F5 SMART URINAL UNIT FOR SINGLE BOWL - DUCT MOUNTED**

F5 smart urinal unit for installation within the water inlet area of the CAMPUS urinal series. Water path pre-assembled with pipe elbows for DN 15 water connection and flushing pipe, valve assembly with water volume regulation including a strainer, solenoid valve and hose. Control unit in sealed plastic box for wireless communication with the F5 smart urinal sensor. Either for battery operation with 6V lithium battery (CR-P2) per control unit or separate power supply via power supply unit 6.75V/12V DC.

Battery compartment including battery or power supply unit with extension cable must be ordered separately.

<b>ACEF3004</b>	F5 Smart urinal duct mount
<b>Mandatory accessories:</b>	
<b>UC00-001</b>	Air break
<b>ACEX9010</b>	Extension cable 5m
<b>F5EF3009 (black) OR F5EF3008 (white)</b>	F5 Smart urinal sensor
<b>ACEX9023 (battery) OR ACEX9001 (mains)</b>	Power supply

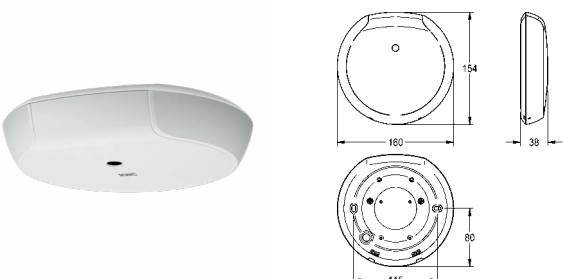


**F5 SMART URINAL SENSOR WHITE**

The F5 Smart Urinal Sensor offers central, ceiling-mounted control for room-wide urinal flushing. It enables touch-free and simultaneous user detection, wirelessly triggering flushing programs for up to 20 connected F5 urinal units. The sensor's coverage area adjusts based on ceiling height, while hygiene flushes activate 24 hours after the last use to maintain cleanliness. Data logging and program adjustments are accessible via an app on Bluetooth®-enabled devices with Android 7 or iOS 11, enabling easy commissioning, program selection, and unit-specific settings.

Dimensions: 160 x 154 x 38mm  
Connection voltage 110–240 V AC, 50/60 Hz  
Area covered 5 x 2.5m at ceiling height 3m


<b>F5EF3008</b>	F5 Smart urinal sensor white
<b>Mandatory accessories:</b>	
<b>ACEF3004</b>	F5 Smart urinal duct mount
<b>ACEF3003</b>	F5 Smart urinal bowl mount - grey water

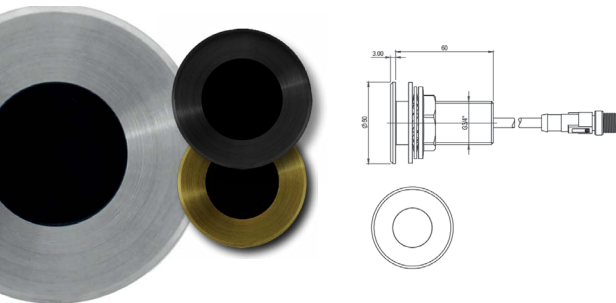

**KINGSWEAR PROGRAMMABLE URINAL SENSORS**

Wall-mounted programmable urinal sensor, manufactured from 316 stainless steel with a brushed finish, also available as gold and black. The sensor is AIR (active infrared) and completely touch-free to promote excellent hygiene. The sensor can be fully programmed with adjustable settings, including sensor range, flush times, hygiene purges and more. Dimensions: 50 x 50 x 3mm

<b>AC02-023</b>	Programmable urinal sensor - Satin
<b>AT10-036</b>	Programmable urinal sensor - Black
<b>AT10-038</b>	Programmable urinal sensor - Gold
<b>Mandatory accessories:</b>	
<b>AT00-221</b>	Single station kit
<b>UC00-001</b>	Air break
<b>AC01-001</b>	Handheld programmer (one per site)
<b>Complimentary accessories:</b>	
<b>AT00-222</b>	Two station kit
<b>AT00-223</b>	Three station kit

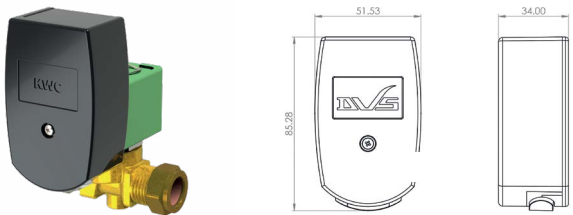

**AQUARI-SAVE URINAL CONTROL VALVE**

The Aquari-Save is a programmable urinal control valve which grants the user complete control over the release of water. This aids in saving water by reducing unnecessary water release outside standard facility use through extensive programmable options. The programmer will set the water usage at equal time distances within the pre-set first and last flush time; for example, if you set 6 flushes in 6 hours, it will flush once per hour. The valve has pre-set flushing times that can be altered via the programmer.


Supplied with handheld programmer.  
Dimensions: 51 x 85 x 34mm

<b>UC99-034</b>	Aquari-save urinal control unit with programmer
<b>Complimentary accessory:</b>	
<b>AC04-046</b>	Aquari-save additional unit without programmer



KWC DVS washrooms

# Urinal flushing

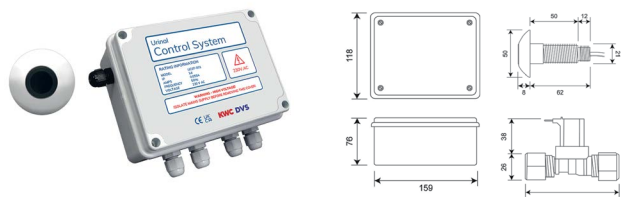

**URINAL CONTROL SYSTEM - SINGLE STATION**

Urinal control system single station kit supplied with one standard sensor with ø50mm bezel. The sensor activates a flush when the user walks away.


The single station kit includes:

- 1 x Mains control box
- 1 x Solenoid valve
- 1 x Sensor with 50mm bezel

**UC07-010** Urinal control system - single station

**Mandatory accessories:**

**UC00-001** Air-break valve

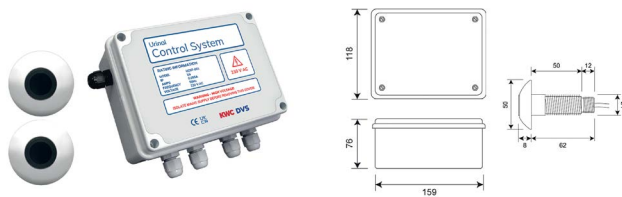

**URINAL CONTROL SYSTEM - TWO STATION**

Urinal control system two station kit supplied with two standard sensors that are supplied with ø50mm bezel. The sensor activates a flush when the user walks away.


The two station kit includes:

- 1 x Mains control box
- 2 x Solenoid valves
- 2 x Sensors with 50mm bezels

**UC07-011** Urinal control system - two station

**Mandatory accessories:**

**UC00-001** Air-break valve

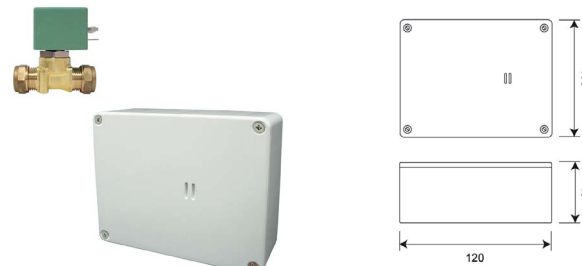

**FLUSHMATIC URINAL CONTROL - MAINS**

Flushmatic urinal control, manufactured from ABS plastic (control box). Designed for use with multiple station urinals and to be surface mounted. The control uses a passive infrared (PIR) detector which detects movement within the sensing area, switching the unit into a timing mode. After a pre-set time, the solenoid valve opens, allowing water to flow into the cistern activating the flushing cycle. The fill-time for the cistern can be customised by the user using the appropriate switches on the Flushmatic board.

Supplied with mains power supply 240V AC


Dimensions: 120 x 100 x 45mm

**UC01-017** Flushmatic urinal control - mains

**Mandatory accessories:**

**F3048** Concealed cistern for Flushmatic 9L **OR**

**F3049** Concealed cistern for Flushmatic 13.5L

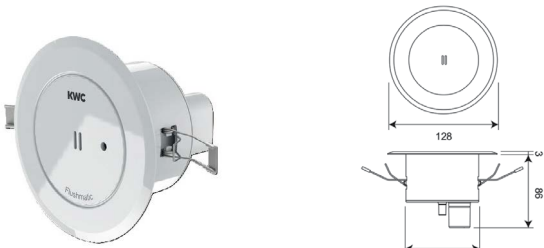

**FLUSHMATIC DOWNLIGHTER KIT - MULTIPLE BOWLS**

Flushmatic urinal control for use with multiple station urinals, manufactured from ABS. The downlighter kit is designed to be ceiling mounted. The control is activated by the passive infrared (PIR) detector which detects movement within the sensing area, switching the unit into a timing mode. After a pre-set time, the solenoid valve opens allowing water to flow into the cistern, activating the flushing cycle.

Dimensions: 128 x 128 x 86mm

Requires KWC DVS cistern.

**UC01-018** Flushmatic downlighter kit - battery

**UC01-024** Flushmatic downlighter kit - mains

**Mandatory accessories:**

**F3048** Concealed cistern for Flushmatic 9L **OR**

**F3049** Concealed cistern for Flushmatic 13.5L




**FLUSHMATIC PEARL SOLO - SINGLE BOWL**

The ceiling mounted Pearl Solo Flushmatic urinal control is used for single station urinals. This works by using a passive infrared (PIR) detector which detects movement within the sensing area, switching the unit into a timing mode. After a pre-set time, the solenoid valve opens, allowing water to flow into the cistern activating the flushing cycle. The flush time can be customised by the user turning the rotary switch on the Flushmatic board.

**UC01-027** Flushmatic pearl solo - mains

**Mandatory accessories:**

**UC00-001** Air-break valve

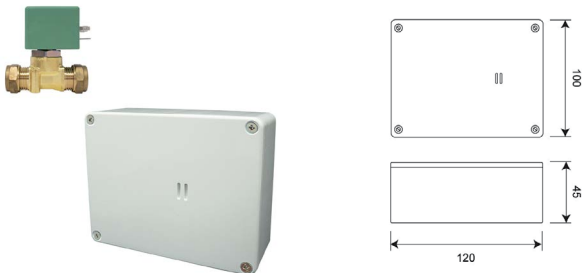

**FLUSHMATIC URINAL CONTROL - BATTERY**

Flushmatic urinal control, manufactured from ABS plastic (control box). Designed for use with multiple station urinals and to be surface mounted. The control uses a passive infrared (PIR) detector which detects movement within the sensing area, switching the unit into a timing mode. After a pre-set time, the solenoid valve opens allowing water to flow into the cistern activating the flushing cycle. The fill-time for the cistern can be customised by the user using the appropriate switches on the Flushmatic board.

Supplied with battery kit 6V DC

Dimensions: 120 x 100 x 45mm

**UC01-005** Flushmatic urinal control - battery

**Mandatory accessories:**

**F3048** Concealed cistern for Flushmatic 9L **OR**

**F3049** Concealed cistern for Flushmatic 13.5L





## WCs

The KWC DVS range of stainless steel, ceramic and GRP WCs is specifically designed to meet the unique demands of healthcare environments, including visitor areas, waiting rooms, and staff toilets. Crafted for both durability and style, these WCs withstand heavy daily use and rigorous cleaning protocols common in hospitals and care facilities.

Whether you prefer a sleek, modern design or a timeless ceramic finish, our collection offers versatile options to complement any healthcare setting's aesthetic.


To support infection control and enhance user convenience, our WCs can be equipped with advanced touch-free flush valves featuring programmable sensors. These innovative flush systems minimise contact points, improve hygiene, and promote water efficiency—key priorities in healthcare washrooms.

With KWC DVS, you can provide a washroom experience that balances durability, hygiene, sustainability, and comfort for patients, visitors, and staff alike.



KWC DVS washrooms

WCs

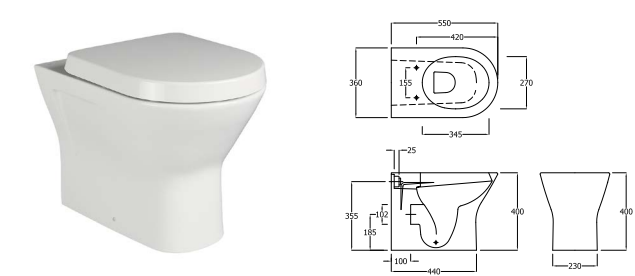

LANGLEY BACK TO WALL RIMLESS CERAMIC WC PAN

Rimless back to wall WC pan, manufactured from high-quality vitreous china to BS 340. With minimalistic design allowing for easy cleaning and maintenance. Rimless flushing for unrivalled hygiene and an effective silent flush using less water. Compatible with concealed cistern, tested with flush volume as low as 4/2.6ltr dual flush for water saving

Standard height and projection pan  
Seat not included  
Dimensions: 360 x 400 x 550mm

SW00-076	Ceramic WC	
Mandatory accessories:		
WC02-011	1 1/2" Cistern kit	
SW00-077	Soft-close toilet seat & cover	OR
SW00-078	Slim soft close toilet seat & cover	




CHARTHAM CERAMIC WC

Rimless back to wall WC pan, manufactured from high-quality vitreous china to BS 340. Sits at a comfort height of 450mm from floor to top of seat. Designed with a sleek easy to clean style and rimless flush to prevent bacteria from building. The rimless technology also offers an effective silent flush using less water

Seat is not included (see options below)  
Dimensions: 360 x 425 x 520mm

SW00-028	Ceramic WC	
Mandatory accessories:		
WC02-011	1 1/2" Cistern kit	
SW00-033	White seat and soft close cover	OR
SW00-034	White seat only	OR
SW00-035	Blue seat only	

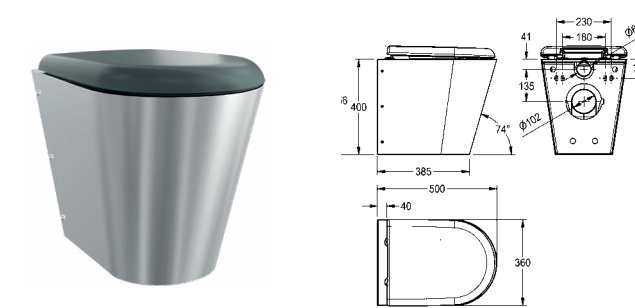

CAMPUS FLOOR STANDING WC PAN WITH SEAT AND LID

Floor standing WC pan with shroud to the floor, stainless steel, satin finished, material thickness 1,5mm, flushing certificated to EN 997, concealed flushing rim with min. 4 litre flushing capacity, with a shrouded 100mm diameter horizontal 'P' trap outlet, pressed seat area tapered towards centre, all edges curved, fixing with included mounting plate conform to EN 33, including safety screws. 4 litre flush EN997 approved.

Dimensions: 360 x 456 x 500mm

CMPX597BN	With black seat and lid	
CMPX597WN	With white seat and lid	
CMPX597GN	With grey seat and lid	
AQFX0006	Installation frame and cistern	




LANGLEY WALL HUNG RIMLESS TOILET PAN

Wall hung rimless WC pan, manufactured from high-quality vitreous china to BS 340. With an innovative rimless hygienic design, making the pan easier to clean, while conserving water. Wall hung installation reduces dirt traps. Compatible with concealed cistern, tested with flush volume as low as 4/2.6ltr dual flush for water saving.

Complies to BS EN 997:2018  
Seat not included  
Dimensions: 360 x 320 x 520mm

SW00-079	Rimless WC pan	
Mandatory accessories:		
AQFX0006	Installation frame and cistern	
SW00-077	Soft close toilet seat & cover	OR
SW00-078	Slim soft close toilet seat & cover	

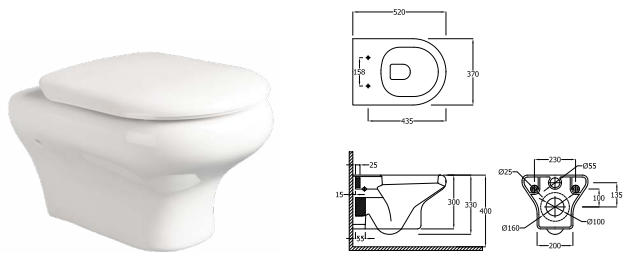

CHARTHAM WALL HUNG CERAMIC WC

Wall hung WC pan. Manufactured from high-quality vitreous china to BS 3402. With an innovative rimless hygienic design, making the pan easier to clean, whilst conserving water. Wall hung installation reduces dirt traps. Compatible with concealed cistern,

Dimensions: 370 x 400 x 520mm

SW00-026	Wall hung WC	
Mandatory accessories:		
AQFX0006	Installation frame and cistern	
SW00-033	White seat and soft close cover	OR
SW00-034	White seat only	OR
SW00-035	Blue seat only	



CAMPUS WALL HUNG WC PAN WITH SEAT AND LID

Wall hung WC pan, stainless steel, satin finished, material thickness 1,5mm, flushing certificated to EN 997, concealed flushing rim with min. 4 liter flushing capacity, with a shrouded 100mm diameter horizontal 'P' trap outlet, pressed seat area tapered towards centre, all edges curved, fixing with mounting plate supplied, conform to EN 33, includes security screws. 4 litre flush EN997 approved.

Dimensions 360 x 409 x 500mm


Options:		
CMPX592BN	With black seat and lid	
CMPX592WN	With white seat and lid	
CMPX592GN	With grey seat and lid	
Mandatory accessories:		
AQFX0006	Installation frame and cistern	





KWC DVS washrooms

WC flushing

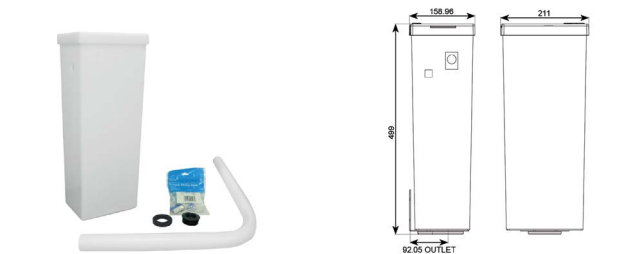


**CONCEALED PLASTIC CISTERN KIT – VERTICAL**

Concealed vertical cistern kit manufactured from ABS. Designed to be wall-mounted. Complete with WRAS approved side entry valve. KWC DVS vertical cisterns are designed to improve flush velocity when compared to traditionally shaped cisterns, with the added benefit of providing more service space either side of the cistern for a more professional installation. Kit includes:

- 1 x WRAS approved side entry valve
- 1 x flush pipe
- 1 x back to pan connector
- 1 x concealed vertical cistern

Cistern Dimensions: 221 x 499 x 159mm (W x H D)

WC02-013	1 1/2" Cistern kit
WC02-014	2" Cistern kit

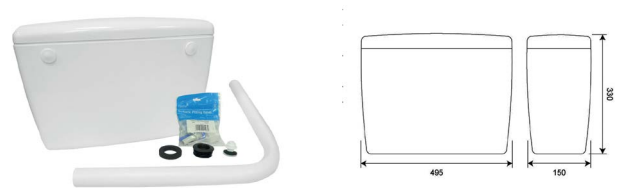


**CONCEALED PLASTIC CISTERN KIT**

Concealed cistern kit manufactured from ABS. Designed to be wall-mounted. Complete with WRAS approved side entry valve. Kit includes:

- 1 x WRAS approved side entry valve
- 1 x flush pipe
- 1 x back to pan connector
- 1 x concealed cistern
- 1 x blanking plug

Cistern Dimensions: 495 x 330 x 150mm (W x H D)

WC02-011	1 1/2" Cistern kit
WC02-012	2" Cistern kit

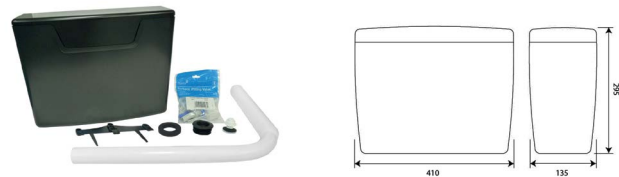

**COMPACT CONCEALED PLASTIC CISTERN KIT**

Black compact cistern kit manufactured from ABS. Designed to be wall-mounted. Complete with WRAS approved side entry valve. Kit includes:

- 1 x WRAS approved side entry valve
- 1 x flush pipe
- 1 x back to pan connector
- 1 x concealed cistern
- 1 x blanking plug


Cistern Dimensions: 410 x 295 x 135mm (W x H D)

WC02-017	1 1/2" Cistern kit
----------	--------------------

WC FLUSHVALVE SPARES

WC01-022	Valve with in-built overflow (valve only) - 1 ½"
WC01-023	Valve with in-built overflow - 2"
WC01-012	Valve base with in-built overflow - 1 ½"
WC01-013	Valve base with in-built overflow- 2"
WC01-032	Manual override valve with in-built overflow - 1 ½"
WC01-033	Manual override valve with in-built overflow - 2"
WC00-129	Flush Flow Restrictor - 2" Flush pipe


WC01-002	Replacement body
WC00-001	Replacement stainless steel piston & spring
WC00-003	Replacement spring only - suitable for all models
WC00-002	Replacement piston & spring for manual override
WC00-010	Control box (PCB) C/W 1.5m cable
WC00-008	Control box (V3 Battery) C/W 1.5m cable
WC00-012	Control box (Low Voltage Mains) C/W 1.5m cable
WC00-155	Enclosure, Intelligent charger & battery pack

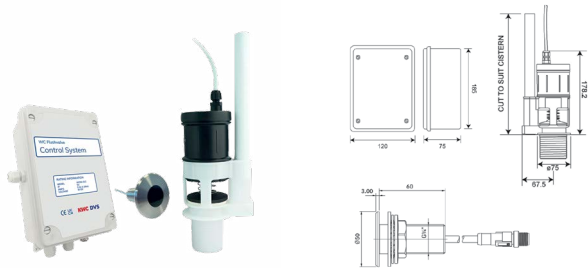

**PROGRAMMABLE SENSOR WC FLUSH VALVE KIT**

Programmable sensor WC flush valve kit. Designed with WRAS approved 4 litre single flush and programmable sensor. Fits to new and existing WC cisterns.

WC03-013	With 1 1/2" base - mains
WC03-014	With 2" base - mains
WC03-017	Mains - for use with AQFX frame
WC03-052	With 1 1/2" base - battery
WC03-053	With 2" base - battery
WC03-019	Battery - for use with AQFX frame

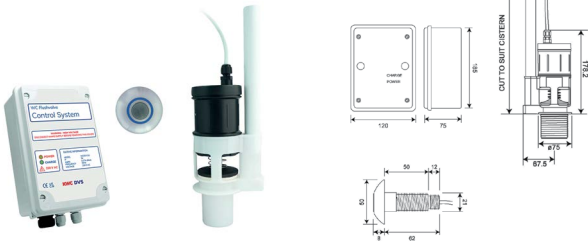


**WC FLUSHVALVE KIT WITH TACTILE SWITCH**

The WC flushing system is an electronically operated drop valve which replaces the traditional syphon and delivers a WRAS approved 4L single flush from the cistern to the lavatory bowl.

- Kit includes:
- 1 x Flushvalve
  - 1 x Tactile switch
  - 1 x Control box

WC03-028	With 1 1/2" base - mains
WC03-029	With 2" base - mains
WC03-063	With 1 1/2" base - battery

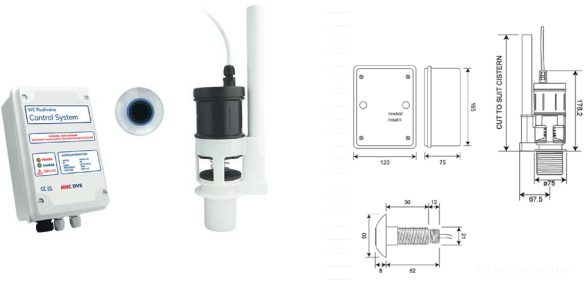


**ANTI-VANDAL WC FLUSHVALVE KIT - WAVE-ON**

WC flushing system with an electronically operated drop valve that replaces the traditional syphon and delivers a WRAS approved 4 litre single flush from the cistern to the lavatory bowl.

- Kit includes:
- 1 x Flushvalve
  - 1 x Tactile wave-on sensor
  - 1 x Control box

WC03-022	With 1 1/2" base - mains
WC02-023	With 2" base - mains

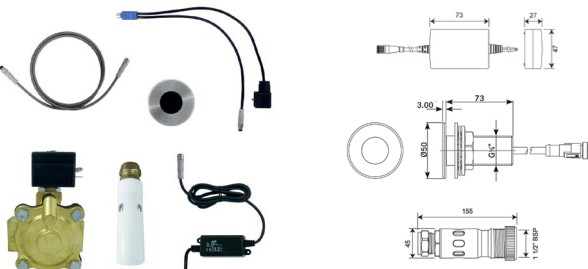


**PROGRAMMABLE DIRECT FLUSHING KIT**

Direct flushing kit for environments where the traditional fitting of a cistern is not desired or not possible. The cistern in this setup is replaced with a direct flushing, mains fed solenoid valve, including an air break to prevent backflow. Kit consists of:

- 1x Programmable WC Sensor
- 1x M8 (Y splitter)
- 1x M8 3m Cable Extension
- 1x Air Break
- 1x 6v DC ASCO Valve
- 1x M8 (Y splitter)
- 1 x Air break
- 1 x PSU

WC03-043	Programmable direct flushing kit
----------	----------------------------------

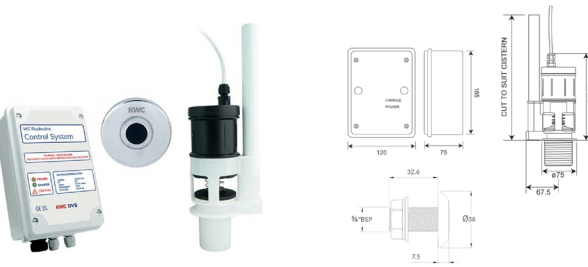

**WC FLUSHVALVE KIT - WAVE-ON**


Touch-free WC flushing system with an electronically operated drop valve that replaces the traditional syphon and delivers a WRAS approved 4 litre single flush from the cistern to the lavatory bowl.

- Kit includes:
- 1 x Flushvalve
  - 1 x Wave-on sensor
  - 1 x Control box

WC03-002	With 1 1/2" base - mains
WC03-003	With 2" base - mains
WC03-050	With 1 1/2" base - battery
WC03-051	With 2" base - battery



# WC frame flushing system




**AQUAFIX INSTALLATION FRAME FOR WC PAN**

AQUAFIX installation element for wall-mounted toilet bowl, with wall-installation cistern. Self-supporting, powder coated steel-frame construction, TÜV tested, for individual mounting for dry-wall lining. Concealed toilet cistern with water condensation insulation, with dual-volume flushing (7,5-4,5l or 4-2l) or start/stop flushing, triggering function transferred via flexible pressure spirals, charge valve noise group I, mounting bracket 4-fold adjustable for toilet-connecting elbow DN 90 / DN 100, complete with flexible connecting hose, toilet-connecting elbow, retaining bolts for toilet, building protection and fastening material.

Dimensions: 450 x 1120mm (W x H)  
Requires WC03-017 flush valve kit or manual flush plate to operate

**AQFX0006** Installation frame




**AQUAFIX INSTALLATION FRAME FOR WC PAN BARRIER FREE**

AQUAFIX installation frame for barrier-free wall-mounted toilet bowl, with wall-installation cistern. Self-supporting, powder coated steel-frame construction, TÜV tested, for individual mounting for dry-wall lining. Concealed toilet cistern with water condensation insulation, with dual-volume flushing (7,5-4,5l or 4-2l) or start/stop flushing, triggering function transferred via flexible pressure spirals, charge valve noise group I, mounting bracket 4-fold adjustable for toilet- connecting elbow DN 90 / DN 100, complete with flexible connecting hose, toilet-connecting elbow, retaining bolts fortoilet, building protection and fastening material.

Dimensions 450 x 1120 mm (Wx H)


**AQFX0007** Installation frame, barrier-free



**AQUAFIX INSULATED CONCEALED CISTERN KIT**

AQUAFIX Concealed cistern with front access, height: 820 mm, insulated against condensation, with dual flush (6l/3l), button function transmitted to AQUAFIX flush valve via flexible cables, connection to push plate via turn-click connection, flush pipe bend with protection cap, AQUAFIX fill valve Noise Class I, angle valve R ½, protection box for access opening can be cut to size, with fixing brackets, without fastenings, packed in a box concealed cistern tested to DIN EN 14055, Noise Class I.

**FLSY0003** Aquafix cistern kit 1 ½"



**AQUAFIX FLUSHING PLATE - PROGRAMMBLE SENSOR**


Flushing plate designed for in wall installation. Fully compatible with AQUAFIX installation frames and the programmable flush valve kits listed below. It comes complete with durable stainless steel fixing bolts and a securing screw for reliable and secure installation.

Dimensions: 207 x 148 x 14mm

**2000105718** AQUAFIX flushing plate - programmable sensor

**Mandatory accessories:**

<b>WC03-017</b>	Mains - for use with AQFX frame	<b>OR</b>
<b>WC03-019</b>	Battery - for use with AQFX frame	




**AQUAFIX FLUSHING PLATE - DUAL FLUSH**

Dual flush, flushing plate designed for in wall installation. Fully compatible with AQUAFIX installation frames and the programmable flush valve kits listed below. It comes complete with durable stainless steel fixing bolts and a securing screw for reliable and secure installation.

Dimensions: 207 x 148 x 22mm

**AQUA555** AQUAFIX flushing plate - dual flush



**AQUAFIX FLUSHING PLATE - SINGLE FLUSH**


Single flush, flushing plate designed for in wall installation. Fully compatible with AQUAFIX installation frames and the programmable flush valve kits listed below. It comes complete with durable stainless steel fixing bolts and a securing screw for reliable and secure installation.

Dimensions: 207 x 148 x 22mm

**AQUA557** AQUAFIX flushing plate - single flush

KWC DVS washrooms

# Hydraulic WC flushing



**F3S WC FLUSH VALVE FOR IN-WALL INSTALLATION**

F3S WC flush valve DN 20 as a finished installation kit for in-wall installation in the basic installation kit, for wall-mounted toilet bowls, fitting group 1. Especially suitable for facilities at risk of vandalism. Self-closing upper component hydraulically controlled, piston-free design, automatic and backlash-free closing. Automatic flush flow regulation and adjustable flush water volume. All-metal construction, visible parts polished chromium-plated. Stainless steel cover plate 190 x 245 x 2 mm, mounting from the front with safety screws, pre-mounted push-button actuation. Hydraulic control lines and mounting material. Depth adjustability 20 mm.

**F3SF4002** WC flush valve for in-wall installation

**Mandatory accessories:**


**F3BF4001** R3 system box for WC flush valve

**AQFX0012** Installation frame for wall-mounted WCs

**AQFX0013** Installation frame for barrier-free wall-mounted WCs

**Optional accessories:**

**AQRM920** Flushing pipe for in-wall installation



**F3S WC FLUSHING VALVE FOR REAR PANEL MOUNTING**


F3S WC flushing valve DN 20, for wall-mounted toilet bowls, fitting group 1, with remote control for concealed mounting. Especially suitable for facilities at risk of vandalism. Self-closing upper component for remote operation, hydraulically controlled, piston-free design, automatic and backlash-free closing. Automatic flush flow regulation and adjustable flush water volume. Flush valve complete with flush pipe connection and screw connection. All-metal construction, visible parts polished chromium-plated. Stainless steel cover plate 190 x 245 x 2 mm for invisible mounting via threaded rods, up to a wall thickness of 50 to 500 mm, pre-mounted push-button actuation, flush-mounted box. Hydraulic control lines and empty conduit (2 m) and mounting material. Connection and maintenance via service room.

**F3SF4001** Flushmatic urinal control - mains

**Optional accessories:**

**ACXF4002** Concealed cistern for Flushmatic 9L **OR**



**ACXF4003** Concealed cistern for Flushmatic 13.5L



**WC FLUSHING VALVE**

AQUALINE WC flush valve DN 20 with remote control, for vandal resistant applications, installation of flush valve outside the user room, remote control in wall installation box with stainless steel cover plate and metal push button.

**AQRM553C** Flushmatic urinal control - mains



**R3 SYSTEM BOX FOR WC FLUSH VALVE**


R3 Basic installation kit for in-wall installation of finished installation kits for WC flushing valve DN 20. System box made of plastic, 174 x 225 mm, with screw connections, flush pipe connection, shell protection, flush connector for flushing and leak test, no stop valve.

**F3BF4001** System box for WC flush valve

**Optional accessories:**

**ACBX9002** Sliding adhesive flange


**ZCMPX006** Mounting traverse



**FLUSH VALVE SENSOR**

WC actuation for cistern for rear wall mounting, Hydraulically controlled. Especially suitable for facilities at risk of vandalism. Remote actuation with push-button for single flush, self-closing, for wall thicknesses from 60 to 270 mm. Polished chromium-plated brass actuation. With hydraulic lifting unit, hydraulic control line 2350mm and mounting material.

**FLSY0004** Flush valve sensor




**AQUAFIX INSULATED CONCEALED CISTERN KIT**

AQUAFIX Concealed cistern with front access, height: 820 mm, insulated against condensation, with dual flush (6l/3l), button function transmitted to AQUAFIX flush valve via flexible cables, connection to push plate via turn-click connection, flush pipe bend with protection cap, AQUAFIX fill valve Noise Class I, angle valve R 1/2, protection box for access opening can be cut to size, with fixing brackets, without fastenings, packed in a box concealed cistern tested to DIN EN 14055, Noise Class I.

**FLSY0003** Aquafix cistern kit 1 1/2"



# GRP WCs - Customise your options in 3

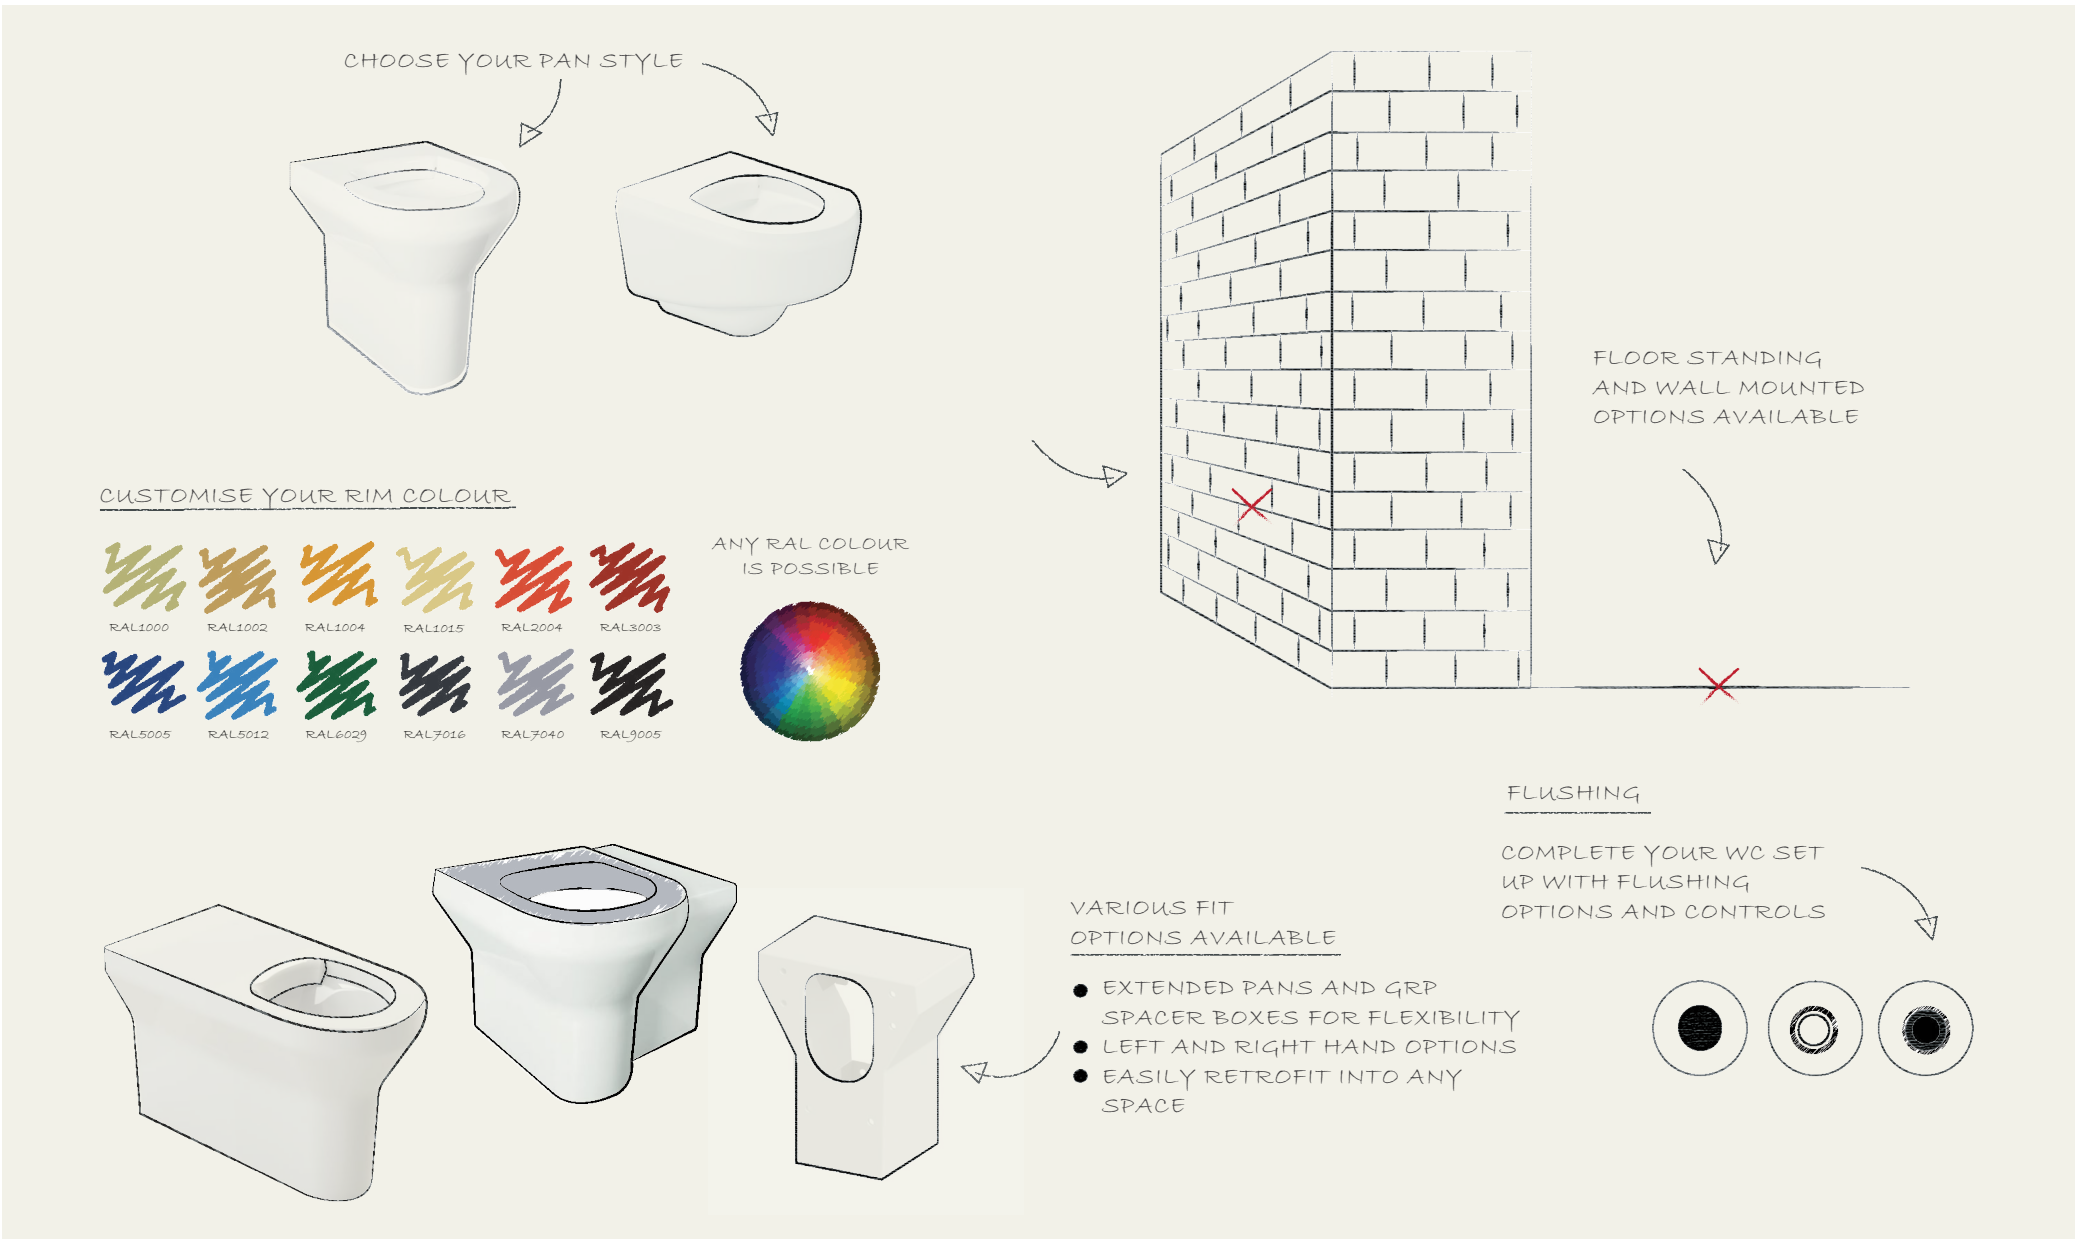

## 1. Choose your pan type

Configure the ideal WC pan for your high-security environment from our versatile range, which includes standard back-to-wall pans, accessible pans, and wall-mounted options, all tailored to meet the unique needs of your project.

Designed for both new builds and refurbishments, our collection offers corner-fit and closed-fit pans, ensuring maximum space efficiency while maintaining durability and ease of maintenance in demanding custodial settings.

## 2. Customise pan rim colour

Our WC pans are available in classic white as standard, offering a clean and timeless look. We also provide the option to customise the rim of our GRP WC pans to perfectly match your unique requirements.

Choose from any RAL colour to create a tailored design that compliments your space while maintaining the durability and functionality expected of our high-security products.

## 3. Configure to your space

Our WC pans are ideal for both new builds and refurbishment projects, providing versatile and adaptable solutions for any space.

With left and right corner-fit options, along with GRP spacer boxes and extended versions. Our WC pan options ensure a seamless installation that meets various layout and design requirements while maintaining durability and security.

## 4. Infill

Our GRP pans are designed for flexibility, offering left, right, or dual infill options, as well as spacer boxes to ensure a perfect fit for any space.

These customisable solutions allow for seamless integration into various layouts, maintaining a secure and hygienic installation. Choose the ideal infill configuration to meet your specific requirements.

## 5. Mounting

Choose from durable floor-standing or space-saving wall-mounted GRP WC pans, expertly designed to meet the specific requirements of your project while ensuring maximum strength, security, and ease of maintenance.


Our GRP WC pans are built to withstand heavy use while providing a hygienic, low-maintenance solution, making them ideal for both new-build and refurbishment projects in custodial and high-security settings.

## 6. Flushing


Complete your WC setup with a range of high-quality flushing options. Choose from durable tactile switches or touch-free programmable flush valves, designed to enhance hygiene, reduce water consumption, and improve ease of use. Our solutions ensure reliable performance while minimising maintenance requirements.

Pair with a compatible cistern, providing a complete, efficient solution suited to both new builds and refurbishment projects.

# Ligature-resistant WCs

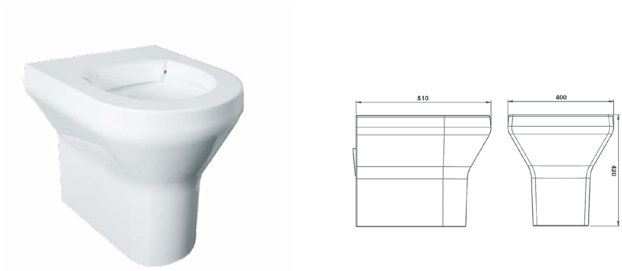

**BACK TO WALL WC PAN**  
High-security WC pan, manufactured from GRP high performance composite material. Designed and tested to be vandal-proof and avoid ligature points wherever possible. The techniques employed to construct these pans are used very successfully in the field of ballistic armour manufacturing, this results in unrivalled impact resistance. A high-grade non-porous polyester gel coat surface specially formulated to resist chemicals and ultraviolet rays comes as standard.  
Dimensions: 400 x 420 x 510mm  
**VR01-010** White WC pan  
**Complimentary accessories:**  
**SP18-035** Painting of WC pan seat - non-standard colour




**BACK TO WALL WC PAN - BLUE TOP (RAL 5011)**  
High-security WC pan with blue top, manufactured from GRP high performance composite material. Designed and tested to be vandal-proof and avoid ligature points wherever possible. The techniques employed to construct these pans are used very successfully in the field of ballistic armour manufacturing, this results in unrivalled impact resistance. A high-grade non-porous polyester gel coat surface specially formulated to resist chemicals and ultraviolet rays comes as standard.  
Dimensions: 400 x 420 x 510mm  
**VR01-034** Blue top WC pan




**BACK TO WALL WC PAN - GREY TOP (RAL 7040)**  
High-security WC pan with grey top, manufactured from GRP high performance composite material. Designed and tested to be vandal-proof and avoid ligature points wherever possible. The techniques employed to construct these pans are used very successfully in the field of ballistic armour manufacturing, this results in unrivalled impact resistance. A high-grade non-porous polyester gel coat surface specially formulated to resist chemicals and ultraviolet rays comes as standard.  
Dimensions: 400 x 420 x 510mm  
**VR01-071** Grey top WC pan



**ACCESSIBLE WC PAN**  
High-security accessible WC pan, manufactured from GRP high performance composite material. Designed and tested to be vandal-proof and avoid ligature points wherever possible. The techniques employed to construct these pans are used very successfully in the field of ballistic armour manufacturing, this results in unrivalled impact resistance. A high-grade non-porous polyester gel coat surface specially formulated to resist chemicals and ultraviolet rays comes as standard.  
Dimensions: 400 x 480 x 510mm  
**VR01-011** White WC pan  
**Complimentary accessories:**  
**VR01-119** WC spacer box  
**SP18-035** Painting of WC pan seat - non-standard colour




**ACCESSIBLE WC PAN - BLUE TOP (RAL 5011)**  
High-security accessible WC pan with blue top, manufactured from GRP high performance composite material. Designed and tested to be vandal-proof and avoid ligature points wherever possible. The techniques employed to construct these pans are used very successfully in the field of ballistic armour manufacturing, this results in unrivalled impact resistance. A high-grade non-porous polyester gel coat surface specially formulated to resist chemicals and ultraviolet rays comes as standard.  
Dimensions: 400 x 480 x 510mm  
**VR01-035** Blue top WC pan  
**Complimentary accessories:**  
**VR01-119** WC spacer box

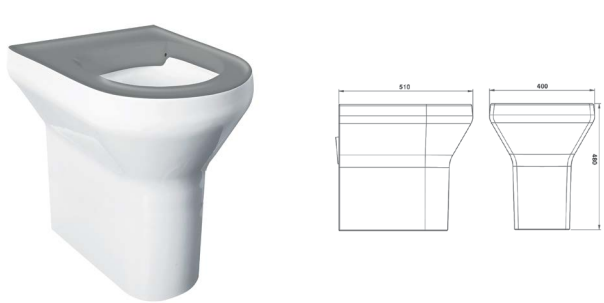

**ACCESSIBLE WC PAN - GREY TOP (RAL 7040)**  
High-security accessible WC pan with grey top, manufactured from GRP high performance composite material. Designed and tested to be vandal-proof and avoid ligature points wherever possible. The techniques employed to construct these pans are used very successfully in the field of ballistic armour manufacturing, this results in unrivalled impact resistance. A high-grade non-porous polyester gel coat surface specially formulated to resist chemicals and ultraviolet rays comes as standard.  
Dimensions: 400 x 480 x 510mm  
**VR01-072** Grey top WC pan  
**Complimentary accessories:**  
**VR01-119** WC spacer box



Ligature-resistant WCs



WALL HUNG WC PAN


High-security WC pan, manufactured from GRP high performance composite material. Designed and tested to be vandal-proof and avoid ligature points wherever possible. The techniques employed to construct these pans are used very successfully in the field of ballistic armour manufacturing, this results in unrivalled impact resistance. A high-grade non-porous polyester gel coat surface specially formulated to resist chemicals and ultraviolet rays comes as standard.

Fixing kit for walls up to 250mm provided as standard  
Dimensions: 400 x 370 x 510mm

- VR01-017 White WC pan wall hung
- Complimentary accessories:
- SP18-035 Painting of WC pan seat - non-standard colour



Any RAL colour is possible




WALL HUNG WC PAN - BLUE TOP (RAL 5011)

High-security WC pan, manufactured from GRP high performance composite material. Designed and tested to be vandal-proof and avoid ligature points wherever possible. The techniques employed to construct these pans are used very successfully in the field of ballistic armour manufacturing, this results in unrivalled impact resistance. A high-grade non-porous polyester gel coat surface specially formulated to resist chemicals and ultraviolet rays comes as standard.

Fixing kit for walls up to 250mm provided as standard  
Dimensions: 400 x 370 x 510mm

- VR01-036 Blue WC pan wall hung




WALL HUNG WC PAN - GREY TOP (RAL 7040)

High-security WC pan, manufactured from GRP high performance composite material. Designed and tested to be vandal-proof and avoid ligature points wherever possible. The techniques employed to construct these pans are used very successfully in the field of ballistic armour manufacturing, this results in unrivalled impact resistance. A high-grade non-porous polyester gel coat surface specially formulated to resist chemicals and ultraviolet rays comes as standard.

Fixing kit for walls up to 250mm provided as standard  
Dimensions: 400 x 370 x 510mm

- VR01-073 Grey WC pan wall hung




CORNER FIT WC PAN

Corner fit high-security WC pan, manufactured from GRP high-performance composite material. Designed and tested to be vandal-resistant and avoid ligature points wherever possible. The techniques employed to construct these pans are used very successfully in the field of ballistic armour manufacturing, this results in unrivalled impact-resistance. A high-grade non-porous polyester gelcoat surface specially formulated to resist chemicals and ultraviolet rays comes as standard.

Dimensions: 600 x 420 x 510mm

- VR01-013 WC pan left-hand corner fit
- VR01-014 WC pan right-hand corner fit
- Complimentary accessories:
- SP18-035 Painting of WC pan seat - non-standard colour




ENCLOSED FIT WC PAN

Enclosed fit high-security WC pan, manufactured from GRP high-performance composite material. Designed and tested to be vandal-resistant and avoid ligature points wherever possible. The techniques employed to construct these pans are used very successfully in the field of ballistic armour manufacturing, this results in unrivalled impact-resistance. A high-grade non-porous polyester gelcoat surface specially formulated to resist chemicals and ultraviolet rays comes as standard.

Dimensions: 800 x 420 x 510mm

- VR01-046 WC pan enclosed fit
- Complimentary accessories:
- SP18-035 Painting of WC pan seat - non-standard colour




GRP ACCESSIBLE WC SPACER BOX

GRP accessible WC spacer box for “against wall” installations. Manufactured from Glass Reinforced Polyester with a white high gloss gelcoat finish. Designed with wheelchair access in mind, providing ease of use. Optional extra for use with all KWC DVS less-abled height back to wall WC pans.

Dimensions: 420 x 490 x 240mm

- VR01-119 WC spacer box



GRP ACCESSIBLE EXTENDED WC PAN


Extended accessible WC pan, manufactured from GRP high performance composite material. Designed and tested to be vandal-resistant and avoid ligature points wherever possible. The techniques employed to construct these pans are used very successfully in the field of ballistic armour manufacturing, this results in unrivalled impact resistance. A high-grade non-porous polyester gelcoat surface specially formulated to resist chemicals and ultraviolet rays comes as standard.

Dimensions: 400 x 480 x 750mm

- VR01-100 Accessible extended WC pan - white
- VR01-101 Accessible extended WC pan - blue
- VR01-102 Accessible extended WC pan - grey

KWC DVS washrooms

Stainless steel WCs

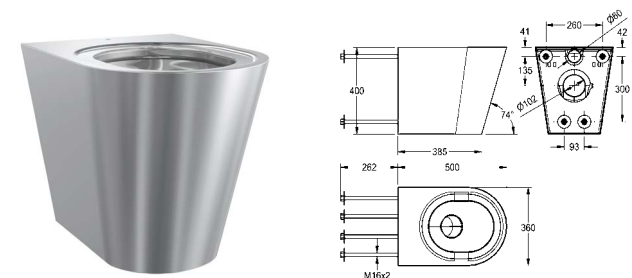


HEAVY DUTY FLOOR STANDING WC

Campus wall hung WC pan for fitting through duct wall, manufactured from grade 1.4301 (304) stainless steel, material thickness 1.5mm for the pan and shroud - satin polish finish. The WC incorporates a stainless steel P trap 102mm o/d. A separate mounting plate and 4 bolts are provided for mounting the WC through a duct wall. The Campus WC has a pressed seating area that does not require a separate seat in vandal-prone installations. However, a seat and lid can be fitted. Approval: Complies with BS EN 997 for 4.5 litre flushing. Also complies with the Australian and German test standards.

Without seat and lid  
Dimensions 360 x 400 x 500 mm (W x H x D)

HDTX597

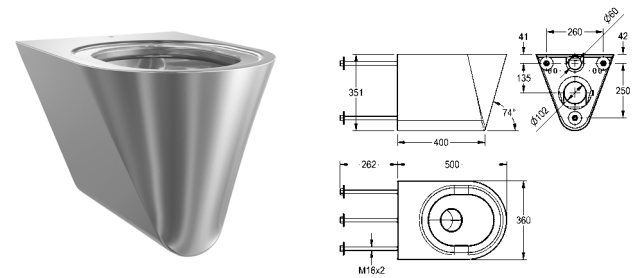

HEAVY DUTY WALL HUNG WC

Wall hung WC pan, hidden mounting with stainless steel rods through wall, fixing and service via maintenance room, stainless steel, surface satin finished, material thickness 1.5mm, flushing certificated to EN 997, concealed flushing rim with min. 4 liter flushing capacity, with a shrouded 100mm diameter horizontal 'P' trap outlet, pressed seat area tapered towards the centre, all edges curved, fixing with 280 mm stainless steel rods and screw nuts (included) through the wall. 4 litre flush EN 997 approved.

Without seat and lid  
Dimensions 360 x 351 x 500 mm (W x H x D)

HDTX592




HEAVY DUTY LESS-ABLED WALL HUNG WC

Less-abled wall hung WC pan, hidden mounting with stainless steel rods through wall, fixing and service via maintenance room, stainless steel, surface satin finished, material thickness 1.5mm, flushing certificated to EN 997, concealed flushing rim with min. 4 liter flushing capacity, with a shrouded 100mm diameter horizontal 'P' trap outlet, pressed seat area tapered towards the centre, all edges curved, fixing with 280 mm stainless steel rods and screw nuts (included) through the wall.

Dimensions 360 x 350 x 700 mm (W x H x D)

HDTX594

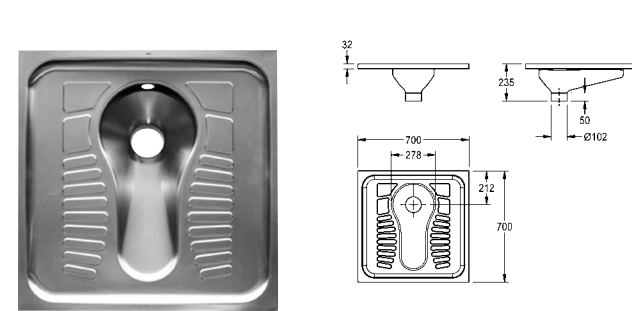

STAINLESS STEEL SQUAT PAN

Squat pan for recessed or inset mounting, stainless steel, surface satin finished, material thickness 1.2mm, DN 100 waste, drainage into ground, slip resistant patterned foot tread plate areas, suitable for recessed mounting into floor.

Dimensions 700 x 235 x 700 mm (W x H x D)

CMPX503N Without spreader or inlet hole

CMPX502N With spreader for 40mm outer diameter flushing pipe







## Children's hospitals


We believe healthcare spaces for children should feel safe, uplifting, and even a little fun. That's why our range includes two height Miranit play troughs designed for accessibility and interaction, vibrant taps, and colourful flush plates — all helping to brighten up washrooms and make them more welcoming for young patients and their families.





KWC DVS washrooms

# Flushino Nursery WCs



**FLUSHINO BACK TO WALL WC**

Our Flushino Back to Wall toilet pan is the ideal height for young children at 350mm, to encourage and support hygienic, independent use. Manufactured from high-quality vitreous china to BS 3402. When paired with Washino & Aquapino, the Flushino completes your ultimate nursery washroom solution.

Meets BS EN997:2018


**SW00-120**    Childrens height WC

**Mandatory accessories:**

**FLSY0003**    Aquafix cistern kit 1 1/2"

**SW00-121**    Flushino toilet seat - White

**Choose from the Flushino plates on the opposite page**



**FLUSHINO TOILET SEAT**

Flushino range toilet seat for use with our back to wall pan. Made from robust and hygienic ABS plastic. Includes chromed brass hinges.


**SW00-121**    Flushino toilet seat - White

**Mandatory accessories:**

**SW00-120**    Childrens height WC

**FLSY0003**    Aquafix cistern kit 1 1/2"

**Choose from the Flushino plates on the opposite page**





**AQUAFIX INSULATED CONCEALED CISTERN KIT**

AQUAFIX Concealed cistern with front access, height: 820 mm, insulated against condensation, with dual flush (6l/3l), button function transmitted to AQUAFIX flush valve via flexible cables, connection to push plate via turn-click connection, flush pipe bend with protection cap, AQUAFIX fill valve Noise Class I, angle valve R 1/2, protection box for access opening can be cut to size, with fixing brackets, without fastenings, packed in a box concealed cistern tested to DIN EN 14055, Noise Class I

**FLSY0003**    Aquafix cistern kit 1 1/2"

**Choose from the Flushino plates on the opposite page**



**FLUSHINO NURSERY PUSH PLATE - GREEN**



Push plate designed specifically for nursery and school environments. Made from durable plastic and finished in high-visibility RAL 6032 yellow. Compatible with AQUAFIX concealed cisterns (front access only), featuring dual flush functionality. Includes actuator frame, colour-matched push buttons, support bracket, and fixing bolts for easy installation. Ideal for educational settings where durability, ease of use, and child-friendly design are essential.

Dimensions: 205 x 145 x 18 mm (W x H x D).

**AQUA561**    Nursery push plate - Green (RAL 6032)

**Mandatory accessories:**

**FLSY0003**    Aquafix cistern kit 1 1/2"



**FLUSHINO NURSERY PUSH PLATE - RED**


Push plate designed specifically for nursery and school environments. Made from durable plastic and finished in high-visibility RAL 3003 yellow. Compatible with AQUAFIX concealed cisterns (front access only), featuring dual flush functionality. Includes actuator frame, colour-matched push buttons, support bracket, and fixing bolts for easy installation. Ideal for educational settings where durability, ease of use, and child-friendly design are essential.

Dimensions: 205 x 145 x 18 mm (W x H x D).

**AQUA559**    Nursery push plate - Red (3003)

**Mandatory accessories:**

**FLSY0003**    Aquafix cistern kit 1 1/2"



**FLUSHINO NURSERY PUSH PLATE - BLUE**



Push plate designed specifically for nursery and school environments. Made from durable plastic and finished in high-visibility RAL 5002 yellow. Compatible with AQUAFIX concealed cisterns (front access only), featuring dual flush functionality. Includes actuator frame, colour-matched push buttons, support bracket, and fixing bolts for easy installation. Ideal for educational settings where durability, ease of use, and child-friendly design are essential.

Dimensions: 205 x 145 x 18 mm (W x H x D).

**AQUA558**    Nursery push plate - Blue (RAL 5002)

**Mandatory accessories:**

**FLSY0003**    Aquafix cistern kit 1 1/2"



**FLUSHINO NURSERY PUSH PLATE - YELLOW**

Push plate designed specifically for nursery and school environments. Made from durable plastic and finished in high-visibility RAL 1023 yellow. Compatible with AQUAFIX concealed cisterns (front access only), featuring dual flush functionality. Includes actuator frame, colour-matched push buttons, support bracket, and fixing bolts for easy installation. Ideal for educational settings where durability, ease of use, and child-friendly design are essential.


Dimensions: 205 x 145 x 18 mm (W x H x D).

**AQUA560**    Nursery push plate - Yellow (RAL 1023)

**Mandatory accessories:**

**FLSY0003**    Aquafix cistern kit 1 1/2"

# Cambrino baby change units

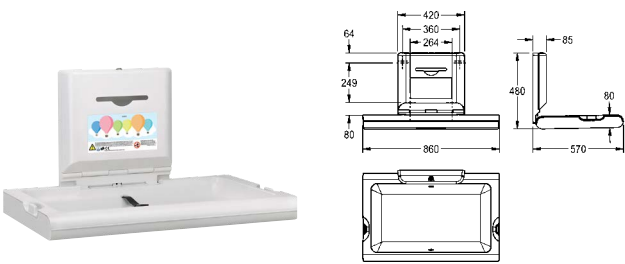


**CAMBRINO HORIZONTAL BABY CHANGING TABLE**

CAMBRINO horizontal baby changing table for wall mounting, made of polypropylene with antibacterial Biocote® protection, white colour, hinged, with integrated shock absorber for safe opening and closing, nylon safety belt and hooks on both sides, lockable dispenser for single-use paper covers in Interfold folding with maximum width 260mm. Certified according to EN 12221-1 and EN 12221-2. Including mounting material and 80 single-use paper covers.

Dimensions when closed 860 x 565 x 100mm (W x H x D)  
Dimensions when open 860 x 480 x 570mm (W x H x D)

**CAMB10HP** Horizontal changing table - plastic

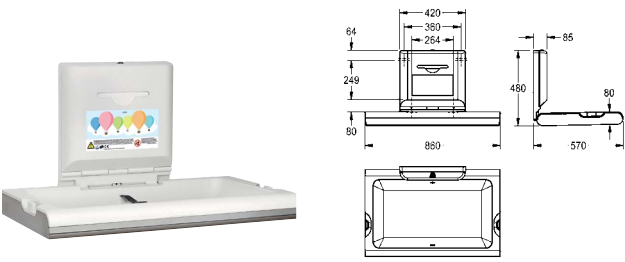


**CAMBRINO HORIZONTAL BABY CHANGING TABLE WITH STAINLESS STEEL COVER**

CAMBRINO horizontal baby changing table for wall mounting, made of polypropylene with antibacterial Biocote® protection, white colour, front panel made of stainless steel, hinged, with integrated shock absorber for safe opening and closing, nylon safety belt and hooks on both sides, lockable dispenser for single-use paper covers in Interfold folding with maximum width 260mm. Certified according to EN 12221-1 and EN 12221-2. Including mounting material and 80 single-use paper covers.

Dimensions when closed 860 x 565 x 100mm (W x H x D)  
Dimensions when open 860 x 480 x 570mm (W x H x D)

**CAMB11HS** Horizontal changing table - s/steel

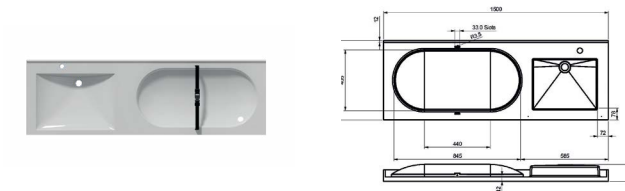

**CAMBRINO SOLID SURFACE BABY CHANGE 1.5 METRE**

Cambrino solid surface baby changing unit for wall mounting. Manufactured from MIRANIT resin-bonded mineral material, with smooth, pore-free surface (temperature-resistant up to 80 °C). Colour Alpine white. With seamless. Left and right-hand versions available.

Dimensions: 1500 x 114 x 530mm

**ANMW0029** Left-hand change right-hand bowl


**ANMW0025** Right-hand change left-hand bowl

**Complimentary accessories:**

**AT03-011** Aquarius A45 tap

**AT00-220** Single station kit

**AC17-047** TMV3

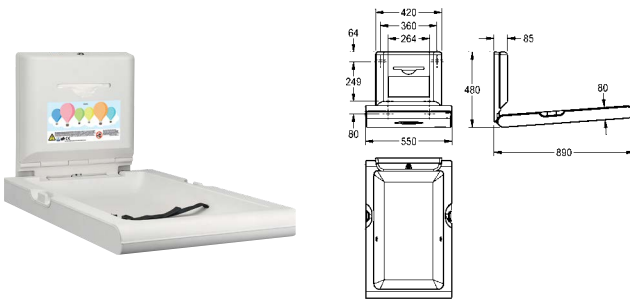


**CAMBRINO VERTICAL BABY CHANGING TABLE**

CAMBRINO vertical baby changing table for wall mounting, made of polypropylene with antibacterial Biocote® protection, white colour, hinged, with integrated shock absorber for safe opening and closing, nylon safety belt and hooks on both sides, lockable dispenser for single-use paper covers in Interfold folding with maximum width 260mm. Certified according to EN 12221-1 and EN 12221-2. Including mounting material and 80 single-use paper covers.

Dimensions when closed 550 x 890 x 100mm (W x H x D)  
Dimensions when open 550 x 480 x 890mm (W x H x D)

**CAMB20VP** Vertical changing table - plastic

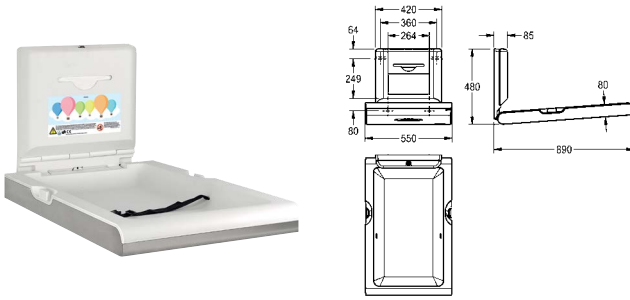


**CAMBRINO VERTICAL BABY CHANGING TABLE WITH STAINLESS STEEL COVER**

CAMBRINO vertical baby changing table for wall mounting, made of polypropylene with antibacterial Biocote® protection, white colour, front panel made of stainless steel, hinged, with integrated shock absorber for safe opening and closing, nylon safety belt and hooks on both sides, lockable dispenser for single-use paper covers in Interfold folding with maximum width 260mm. Certified according to EN 12221-1 and EN 12221-2. Including mounting material and 80 single-use paper covers.

Dimensions when closed 550 x 890 x 100mm (W x H x D)  
Dimensions when open 550 x 480 x 890mm (W x H x D)

**CAMB22VS** Vertical changing table - s/steel

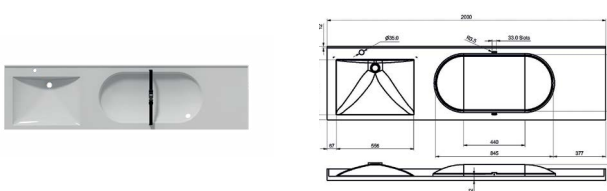

**CAMBRINO SOLID SURFACE BABY CHANGE 2 METRE**

Cambrino solid surface baby changing unit for wall mounting. Manufactured from MIRANIT resin-bonded mineral material, with smooth, pore-free surface (temperature-resistant up to 80 °C). Colour Alpine white. With seamless. Left and right-hand versions available.

Dimensions: 2000 x 114 x 530mm

**ANMW0028** Left-hand change right-hand bowl

**ANMW0024** Right-hand change left-hand bowl

**Complimentary accessories:**

**AT03-011** Aquarius A45 tap

**AT00-220** Single station kit

**AC17-047** TMV3





## Accessible washrooms


At KWC DVS, we understand the importance of inclusive design in healthcare environments. Our range of accessible washroom solutions has been thoughtfully developed to meet the needs of patients, visitors, and staff with reduced mobility — without compromising on style or functionality.

Designed for hospitals, clinics, and care facilities, our range includes ergonomic basins with generous knee clearance, easy-reach controls, and full Doc M packs that combine WCs, basins, and grab rails into cohesive, compliant solutions.

Each element is engineered to provide comfort and confidence — from optimal seat heights to discreet, well-positioned grab rails that offer support while maintaining a clean, modern aesthetic.



# Accessible sanitaryware

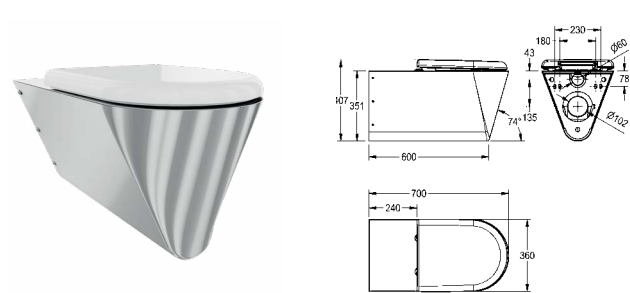


**CAMPUS ACCESSIBLE WALL HUNG WC**

Wall hung accessible WC, manufactured from stainless steel with a satin finish. Material thickness 1,5mm, flushing certificated to EN 997, concealed flushing rim with min. 4 litre flushing capacity, with a shrouded 100mm diameter horizontal 'P' trap outlet, pressed seat area tapered towards centre, all edges curved, fixing with included mounting plate conform to EN 33, includes safety screws.

Flush: 4 litre  
Dimensions without toilet seat: 360 x 351 x 700mm  
Dimensions with seat and lid: 360 x 407 x 700mm

**CMPX594** Without toilet seat  
**CMPX594BN** With black seat and lid  
**CMPX594GN** With grey seat and lid  
**CMPX594WN** With white seat and lid

**Mandatory accessories:**  
**AQFX0007** Installation frame, barrier-free

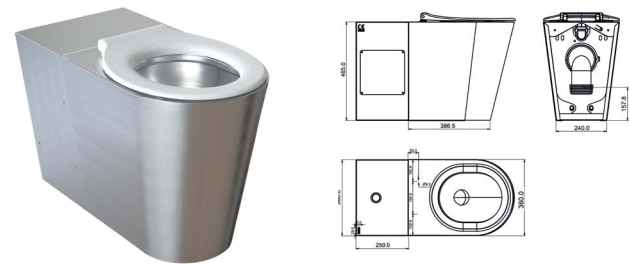

**CAMPUS STAINLESS STEEL ACCESSIBLE WC**

Floor standing accessible WC pan, manufactured from grade 1.4301 (304) stainless steel with a satin finish. Supplied complete with multikwik connector. A flush bend and 90° plastic bend are provided for the cistern downpipe connection. Rear mounting plate with 4 no. stainless steel bolts supplied, for mounting onto duct wall. The front of the WC is fixed to the floor using a joggle strip. Pipe fixing is achieved by using the side access panel provided. The WC is supplied with a disabled person's white plastic seat. Rear inlet and top inlet versions available. Cistern required.

Dimensions: 360 x 465 x 637mm

**G21748N** Accessible WC 480mm high - rear inlet  
**G21748NT** Accessible WC 480mm high - top inlet



**CAMPUS BARIATRIC WC**

The Bariatric toilet is manufactured from grade 1.4301 (304) stainless steel, material thickness 1.5mm with a satin finish. Complies with BS EN997 for 4 litre flushing. The specially designed floor standing toilet is fitted with a seat that is ideal for making use more comfortable. Its large seat area gives increased support and comfort. A width of 50cm gives comfort, security and will give long lasting use in any hospital or medical installation and the increased width makes the toilet seat ideal for a larger person up to 1000kg. With heavy duty seat and lid - Max user weight 381kg. Cistern required.

Dimensions: 600 x 400 x 555mm

**G22080N** Campus bariatric WC




**CHARTHAM CLOSE COUPLED TOILET PAN WITH CISTERN**

Rimless close coupled WC pan with extended projection to 750mm for Doc M compliance. Manufactured from high-quality vitreous china to BS 3402. This close coupled toilet comes complete with the WC pan and close coupled 6/3ltr lever action cistern. With rimless design for optimum hygiene & ease of cleaning

4.5ltr effective flush volume  
480mm high (including seat) and 750mm projection pan  
Seat sold separately available in 3 colours (below)  
Dimensions: 830 x 360 x 750mm

**SW00-088** Close coupled WC with cistern

**Mandatory accessories:**  
**SW00-034** White toilet seat  
**SW00-035** Blue toilet seat  
**SW00-087** Dark grey toilet seat

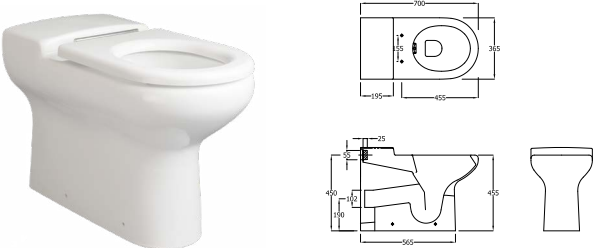


**CHARTHAM RIMLESS WC HBN COMPLIANT**

Rimless back to wall WC pan with 700mm projection. Manufactured from high-quality vitreous china to BS 3402. Designed with rimless flush to prevent bacteria from harbouring. Manufactured in accordance with HTM64/HBN 00-10, Part C Standards. Cistern required.

Dimensions: 365 x 455 x 700mm

**SW00-030** Chartham rimless WC HBN compliant

**Mandatory accessories:**  
**SW00-034** White toilet seat  
**SW00-035** Blue toilet seat  
**SW00-087** Dark grey toilet seat

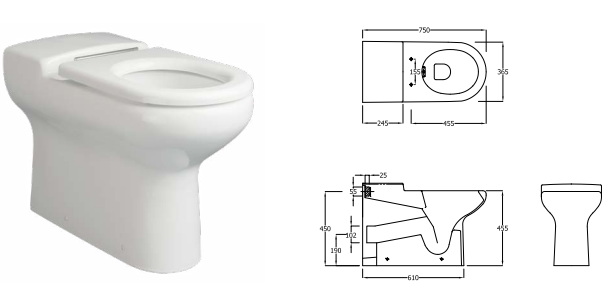

**CHARTHAM RIMLESS DOC M WC**

Rimless back to wall WC pan with extended projection to 750mm for Doc M compliance. Manufactured from high-quality vitreous china to BS 3402. Designed with rimless flush to prevent bacteria from harbouring. Cistern required.



Dimensions: 365 x 455 x 750

**SW00-031** Chartham rimless DOC M WC

**Mandatory accessories:**  
**SW00-034** White toilet seat  
**SW00-035** Blue toilet seat  
**SW00-087** Dark grey toilet seat



# Accessible sanitaryware

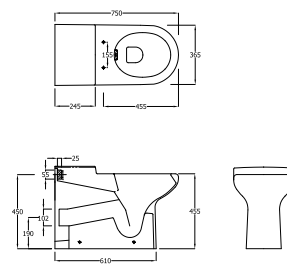

**WALL HUNG DOC M WC**



Rimless back to wall WC pan with extended projection to 750mm for Doc M compliance. Manufactured from high-quality vitreous china to BS 3402. Designed with rimless flush to prevent bacteria from harbouring. Cistern required.

Dimensions: 365 x 455 x 750

**SW00-089** Wall hung DOC M WC

**Mandatory accessories:**

**SW00-091** White seat for wall hung WC

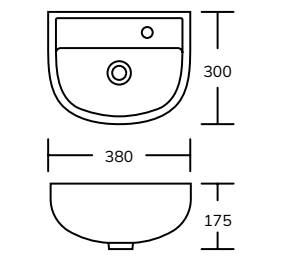

**WALL HUNG DOC M CERAMIC BASIN 380MM**

San Ceram wall hung basin manufactured from Vitreous china with an alpine white finish. Designed with a right-hand or left-hand tap hole and is ideal where space is constraint. Complete without overflow and fixings for installation.

Doc M, HBN & HTM Compliant

Dimensions: 380 x 175 x 300mm

**SW00-047** Basin with right-hand tap hole

**SW00-048** Basin with left-hand tap hole



**Mandatory accessories:**

**SW00-044** 1 1/4" Plastic bottle trap

**SW00-049** 1 1/4" Strainer waste - unslotted

**SW00-050** 1 1/4" Press top waste - unslotted

**OR**

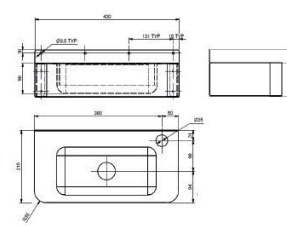

**STAINLESS STEEL ACCESSIBLE WASHBASIN**

Stainless steel accessible washbasin for wall mounting. Manufactured from 1.4301 Chrome Nickel steel with a satin finish.

Dimensions 450 x 100 x 350mm

Bowl dimensions 400 x 60 x 230mm



**ANMX150R** Stainless steel accessible washbasin RH

**ANMX150L** Stainless steel accessible washbasin LH

**Mandatory accessories:**

**SW00-044** 1 1/4" Plastic bottle trap

**SW00-049** 1 1/4" Strainer waste - unslotted

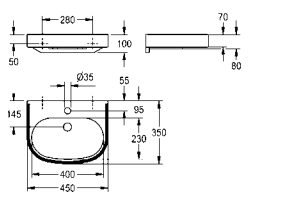

**VARIUSCARE SINGLE WASHBASIN, BARRIER-FREE**

VARIUScare single wash basin made of MIRANIT resin-bonded mineral material. Colour Alpine white with colour strip. Wheelchair accessible, with integrated gripping edge. Seamless moulded bowl, without overflow. With tap hole. Mounting on washbasin back panel. Rear contoured edge. Mounting material included.

Dimensions 450 x 100 x 350mm

Bowl dimensions 400 x 60 x 230mm

**ANMW505** Alpine White

**ANMW504-BLACK** Black strip (RAL 7022)

**ANMW504-BLUE** Blue strip (RAL 5011)

**ANMW504-RED** Red strip (RAL 3020)

**Mandatory accessories:**

**SW00-044** 1 1/4" Plastic bottle trap

**SW00-049** 1 1/4" Strainer waste - unslotted

**SW00-050** 1 1/4" Press top waste - unslotted

**OR**



KWC DVS washrooms

DOC M packs



CORNER WC DOC M PACK - BACK TO WALL BLUE

Blue Doc M back to wall pack supplied with: rimless 750mm projection back to wall WC with blue seat, concealed plastic cistern kit, WC Flushvalve kit with programmable sensor, 380mm single washbasin, slotted waste, bottle trap, Aquarius A45 doc M tap, anti-microbial single station mains kit, TMV3 thermostatic mixing valve, and grab rail kit.

Grab rail kit includes:

- 1 x backrest rail 400 x 150mm (RAL 5011)
- 1 x Blue backrest cushion (RAL 5011)
- 1 x double arm hinged support rail 760 x 250mm (RAL 5011)
- 4 x straight grab rail 35 x 600mm (RAL 5011)
- 1 x straight grab rail 35 x 450mm (RAL 5011)

DMPX45LHB	Left-hand
DMPX45RHB	Right-hand



CORNER WC DOC M PACK - CLOSE COUPLED BLUE

Blue Doc M closed couple pack supplied with: Rimless 750mm projection closed coupled WC with blue seat, 380mm single washbasin, slotted waste, bottle trap, F5L-Therm barrier-free thermostatic single-lever pillar mixer tap, TMV3 thermostatic mixing valve, and grab rail kit.

Grab rail kit includes:

- 1 x double arm hinged support rail 760 x 250mm (RAL 5011)
- 4 x straight grab rail 35 x 600mm (RAL 5011)
- 1 x straight grab rail 35 x 450mm (RAL 5011)

DMPXF5LHB	Left-hand
DMPXF5RHB	Right-hand



CORNER WC DOC M PACK - BACK TO WALL SATIN

Stainless steel Doc M back to wall pack supplied with: G21748N stainless steel floor standing accessible WC pan, cistern, flusvalve kit, Stainless steel barrier-free single washbasin, slotted waste, bottle trap, Aquarius A45 doc M tap, anti-microbial single station mains kit, TMV3 thermostatic mixing valve, and grab rail kit.

Grab rail kit includes:

- 1 x stainless steel backrest rail 400 x 150mm
- 1 x white backrest cushion
- 1 x stainless steel hinge support rail 760 x 250mm
- 4 x stainless steel straight grab rail 35 x 600mm
- 1 x stainless steel straight grab rail 35 x 450mm

DMPX45LHS	Left-hand
DMPX45RHS	Right-hand





# DOC M packs with thermal disinfection and sight-line basin technology



**CORNER WC DOC M PACK - BTW WITH TDV**

Blue Doc M back to wall pack supplied with: rimless 750mm projection back to wall WC with blue seat, concealed plastic cistern kit, WC Flushvalve kit with programmable sensor, Variuscare barrier-free single washbasin with blue coloured stripe for the visually impaired, slotted waste, bottle trap, Aquarius A45 doc M tap, anti-microbial single station mains kit, thermal disinfection valve, TMV3 thermostatic mixing valve, and grab rail kit.

Grab rail kit includes:

- 1 x backrest rail 400 x 150mm (RAL 5011)
- 1 x Blue backrest cushion (RAL 5011)
- 1 x double arm hinged support rail 760 x 250mm (RAL 5011)
- 4 x straight grab rail 35 x 600mm (RAL 5011)
- 1 x straight grab rail 35 x 450mm (RAL 5011)

<b>DMPX45LHBT</b>	Left-hand
<b>DMPX45RHBT</b>	Right-hand



**CORNER WC DOC M PACK - CLOSE COUPLED WITH TDV**

Blue Doc M closed couple pack supplied with: Rimless 750mm projection close coupled WC with blue seat, Variuscare barrier-free single washbasin with blue coloured stripe for the visually impaired, slotted waste, bottle trap, F5L-Therm barrier-free thermostatic single-lever pillar mixer tap, hygiene unit for F5L tap, battery compartment, TMV3 thermostatic mixing valve, and grab rail kit.

Grab rail kit includes:

- 1 x double arm hinged support rail 760 x 250mm (RAL 5011)
- 4 x straight grab rail 35 x 600mm (RAL 5011)
- 1 x straight grab rail 35 x 450mm (RAL 5011)

<b>DMPXF5LHBT</b>	Left-hand
<b>DMPXF5RHBT</b>	Right-hand

**NEW** Hygiene unit allows thermal purge override of the manual tap



**CORNER WC DOC M PACK - BTW WITH TDV**

Stainless steel Doc M back to wall pack supplied with: G21748N stainless steel floor standing accessible WC pan, cistern, flushvalve kit, Variuscare barrier-free single washbasin with black coloured stripe for the visually impaired, slotted waste, bottle trap, Aquarius A45 doc M tap, anti-microbial single station mains kit, thermal disinfection valve, TMV3 thermostatic mixing valve, and grab rail kit.

Grab rail kit includes:

- 1 x stainless steel backrest rail 400 x 150mm
- 1 x white backrest cushion
- 1 x stainless steel hinge support rail 760 x 250mm
- 4 x stainless steel straight grab rail 35 x 600mm
- 1 x stainless steel straight grab rail 35 x 450mm

<b>DMPX45LHST</b>	Left-hand
<b>DMPX45RHST</b>	Right-hand



**DOC M SHOWER PACK CHROME**

Stainless steel Doc M shower pack. Pack includes grab rail set, manufactured from stainless steel with 35mm diameter rails. Full doc M pack includes: Vita showerhead, shower rail and hose, TMV3 thermostatic mixing valve and grab rail kit.

Grab rail kit includes:

- 1 x stainless steel backrest rail 400 x 150mm
- 1 x white backrest cushion
- 2 x stainless steel hinge support rail 760 x 250mm
- 2 x stainless steel straight grab rail 35 x 600mm
- 1 x stainless steel shower seat with white lid 650 x 400mm

**DMPXVT20S**



**DEMENTIA CARE DOC M SHOWER PACK WITH LIGATURE-RESISTANT GRAB RAILS**

Doc M shower pack in red supplied with: F4LT2003 thermostatic single-lever wall-mounted mixer with hand shower and grab rail kit.

Grab rail kit includes:

- 1 x ligature-resistant backrest rail 400 x 150mm (RAL 3020)
- 1 x ligature-resistant white backrest cushion
- 2 x ligature-resistant hinge support rail 760 x 250mm (RAL 3020)
- 2 x ligature-resistant straight grab rail 35 x 600mm (RAL 3020)
- 1 x shower seat 650mm (RAL 3020)

**DMPXVT20R**



**HIGH-SECURITY LIGATURE-RESISTANT DOC M SHOWER PACK**

Doc M ligature-resistant shower pack in blue supplied with: high-security dual outlet shower, thermal disinfection valve, TMV3 thermostatic mixing valve and grab rail kit.

Grab rail kit includes:

- 1 x ligature-resistant backrest rail 400 x 150mm (RAL 5011)
- 1 x ligature-resistant white backrest cushion
- 2 x ligature-resistant hinge support rail 760 x 250mm (RAL 5011)
- 2 x ligature-resistant straight grab rail 35 x 600mm (RAL 5011)
- 1 x shower seat 650mm (RAL 5011)

**DMPXVR13B**

# Grab rail packs for back to wall WC




**BLUE BACK TO WALL GRAB RAIL PACK**

Grab rail kit includes:

- GRBX141B 1 x straight grab rail 35 x 450mm
- GRBX161B 4 x straight grab rail 35 x 600mm
- GRBX271B 1 x double arm hinged support rail 760 x 250mm
- GRBX312B 1 x Blue backrest cushion
- GRBX321B 1 x backrest rail 400 x 150mm

**GRBX801**

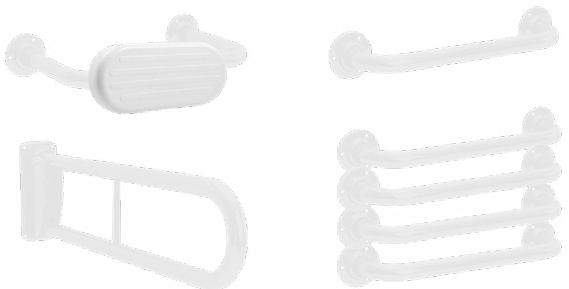

**WHITE BACK TO WALL GRAB RAIL PACK**

Grab rail kit includes:

- GRBX141W 1 x straight grab rail 35 x 450mm
- GRBX161W 4 x straight grab rail 35 x 600mm
- GRBX271W 1 x double arm hinged support rail 760 x 250mm
- GRBX312W 1 x backrest cushion
- GRBX321W 1 x backrest rail 400 x 150mm

**GRBX805**



**BLACK BACK TO WALL GRAB RAIL PACK**

Grab rail kit includes:

- GRBX141BLK 1 x straight grab rail 35 x 450mm
- GRBX161BLK 4 x straight grab rail 35 x 600mm
- GRBX271BLK 1 x double arm hinged support rail 760 x 250mm
- GRBX312W 1 x backrest cushion
- GRBX321BLK 1 x backrest rail 400 x 150mm

**GRBX810**



**SATIN BACK TO WALL GRAB RAIL PACK**

Grab rail kit includes:

- GRBX141 1 x straight grab rail 35 x 450mm
- GRBX161 4 x straight grab rail 35 x 600mm
- GRBX271 1 x double arm hinged support rail 760 x 250mm
- GRBX312W 1 x backrest cushion
- GRBX321 1 x backrest rail 400 x 150mm

**GRBX812**





# Grab rail packs for close coupled WC



**BLUE GRAB RAIL PACK**

Grab rail kit includes:

- GRBX141B 1 x straight grab rail 35 x 450mm
- GRBX161B 4 x straight grab rail 35 x 600mm
- GRBX271B 1 x hinged support rail 760 x 250mm

**GRBX802**



**WHITE GRAB RAIL PACK**

Grab rail kit includes:

- GRBX141W 1 x straight grab rail 35 x 450mm
- GRBX161W 4 x straight grab rail 35 x 600mm
- GRBX271W 1 x hinged support rail 760 x 250mm

**GRBX806**



**BLACK GRAB RAIL PACK**

Grab rail kit includes:

- GRBX141BLK 1 x straight grab rail 35 x 450mm
- GRBX161BLK 4 x straight grab rail 35 x 600mm
- GRBX271BLK 1 x hinged support rail 760 x 250mm

**GRBX811**



**SATIN GRAB RAIL PACK**

Grab rail kit includes:



- GRBX141 1 x straight grab rail 35 x 450mm
- GRBX161 4 x straight grab rail 35 x 600mm
- GRBX271 1 x hinged support rail 760 x 250mm

**GRBX813**







# Accessible water controls

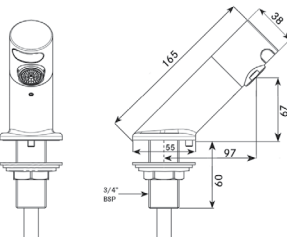

**AQUARIUS A45 DOC M TAP SPOUT**

Aquarius deck mounted A45 Doc M tap manufactured in 316 stainless steel with a brushed finish. Sensor operated for maximum hygiene and efficiency. 5 litres per minute integrated flow control. (other flow rates available). Designed with automatic purge function, sensor range adjustment, wave-on/wave-off function, anti-vandal and lock out functions and a chlorination function. TMV3 required. Spout projection: 97mm



<b>AT03-021</b>	With PEX hose (15mm)
<b>AT03-022</b>	With copper tails (10mm)
<b>Mandatory accessories:</b>	
<b>AT00-221</b>	Single station anti-microbial mains kit
<b>AC17-047</b>	TMV3
<b>Complimentary accessories:</b>	
<b>SD01-012</b>	A45 soap dispenser

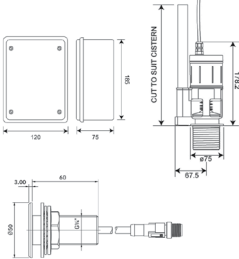

**PROGRAMMABLE SENSOR WC FLUSH VALVE KIT**

Programmable sensor WC flush valve kit. Designed with WRAS approved 4 litre single flush and programmable sensor. Fits to new and existing WC cisterns.



<b>WC03-013</b>	With 1 1/2" base - mains
<b>WC03-014</b>	With 2" base - mains
<b>WC03-017</b>	Mains - for use with AQFX frame
<b>WC03-052</b>	With 1 1/2" base - battery
<b>WC03-053</b>	With 2" base - battery
<b>WC03-019</b>	Battery - for use with AQFX frame

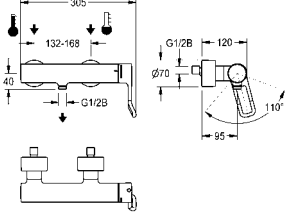

**F4LT-MED THERMOSTATIC SINGLE-LEVER SHOWER MIXER**

F4LT-Med thermostatic lever mixer, thermostat-controlled mixer cartridge with expansion element & active scald protection, fail-safe against backflow as well as adjustable & turn-proof temperature stop, & ceramic disc technology. Optimised for cleaning, scald-protected, safe-touch housing with hand shower connection, G 1/2 B. All-metal construction, polished chromium-plated brass. With thermal insulation components to reduce heat transfer from the tap housing to the cold-water line. Includes strainers & fully covered by depth-adjustable screw rosettes.

<b>F4LT2003</b>	Shower mixer
<b>Mandatory accessories:</b>	
<b>ACXX2008</b>	Shower bracket
<b>26.000.111.040</b>	Hand showerhead
<b>26.001.003.000</b>	Shower hose

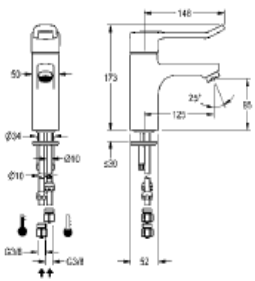

**F5L-THERM THERMOSTATIC SINGLE-LEVER PILLAR MIXER**

Single-lever mixer with thermal disinfection capability. DN 15 pillar mixer for accessible sanitary facilities, lever length 150mm. Designed with Easy grip and colour contrast for the visually impaired. Thermostatically-controlled mixer cartridge with expansion element and active scald protection as well as adjustable and turn-proof temperature stop, and ceramic disc technology. With mechanism for optional hygiene unit for automatic hygiene flushing and program-controlled thermal disinfection and storage of statistical data.

<b>F5LT1011</b>	F5L Tap
<b>Complimentary accessories:</b>	
<b>ACLX1001</b>	Hygiene unit for on-wall installation
<b>ACLX1005</b>	Hygiene unit for in-wall installation
<b>SD01-003</b>	Pillar soap dispenser (chrome)





# High-security shower packs



**DEMENTIA CARE DOC M SHOWER PACK WITH LIGATURE-RESISTANT GRAB RAILS**

Doc M shower pack in red supplied with: F4LT2003 thermostatic single-lever wall-mounted mixer with hand shower and grab rail kit.

Grab rail kit includes:

- 1 x ligature-resistant backrest rail 400 x 150mm (RAL 3020)
- 1 x ligature-resistant white backrest cushion
- 2 x ligature-resistant hinge support rail 760 x 250mm (RAL 3020)
- 2 x ligature-resistant straight grab rail 35 x 600mm (RAL 3020)
- 1 x shower seat 650mm (RAL 3020)

**DMPXVT20R**



**HIGH-SECURITY LIGATURE-RESISTANT DOC M SHOWER PACK**

Doc M ligature-resistant shower pack in blue supplied with: high-security dual outlet shower, thermal disinfection valve, TMV3 thermostatic mixing valve and grab rail kit.

Grab rail kit includes:

- 1 x ligature-resistant backrest rail 400 x 150mm (RAL 5011)
- 1 x ligature-resistant white backrest cushion
- 2 x ligature-resistant hinge support rail 760 x 250mm (RAL 5011)
- 2 x ligature-resistant straight grab rail 35 x 600mm (RAL 5011)
- 1 x shower seat 650mm (RAL 5011)

**DMPXVR13B**



**HIGH-SECURITY LIGATURE-RESISTANT DOC M SHOWER PACK**

Doc M ligature-resistant shower pack in White supplied with: high-security dual outlet shower, thermal disinfection valve, TMV3 thermostatic mixing valve and grab rail kit.


Grab rail kit includes:

- 1 x ligature-resistant backrest rail 400 x 150mm (RAL 5011)
- 1 x ligature-resistant white backrest cushion
- 2 x ligature-resistant hinge support rail 760 x 250mm (RAL 5011)
- 2 x ligature-resistant straight grab rail 35 x 600mm (RAL 5011)
- 1 x shower seat 650mm (RAL 5011)

**DMPXVR13W**




Bath filling




**LIGATURE-RESISTANT BATH FILLING MODULE**  
Safe Ensuite bath module: moulded impact resistant construction, vandal and ligature-resistant, suitable for mental healthcare, healthcare and custodial applications.  
Separate sensors, control and TMV required  
Dimensions: 210 x 190 x 100mm  
**VR01-111** Safe ensuite bath filling module



**HIGH-SECURITY ASSISTED BATH SETUP - LIGATURE-RESISTANT**  
Accessible bath pack in stainless steel supplied with: white enameled steel bath, high-security bath filling backplate with hot and cold tactile sensors, bath control system mains operated, anti-microbial valve, thermal disinfection valve, TMV3 thermostatic mixing valve and red grab rails. Manufactured in accordance with HBN 00-10, Part C Standards.  
Bath dimensions: 1700 x 700mm  
Grab rails include:  
3 x ligature-resistant straight grab rail 35 x 600mm (RAL 3020)  
**DMPX59R**



**LIGATURE-RESISTANT BATH SPOUT 1/2" BSP**  
High-security deck mounted Spout. Ligature-resistant design. Brushed 316 Stainless Steel finish and DZR Brass BSP connection.  
Separate sensors, control and TMV required  
**AT07-058** Ligature-resistant bath spout




**LIGATURE-RESISTANT BATH SPOUT 3/4" BSP**  
High-security deck mounted spout manufactured in 316 stainless steel with a brushed finish. Designed for mental healthcare and high-security environments with ligature-resistant design, conforming to the safer cell standards and testing. Additional TMV3 required.  
DZR Brass BSP connection  
Separate sensors, control and TMV required  
Dimensions: 58 x 25 x 58mm  
**AT07-059** Ligature-resistant bath spout



**HIGH-SECURITY ASSISTED BATH SETUP - LIGATURE-RESISTANT**  
Accessible bath pack in stainless steel supplied with: white enameled steel bath, high-security bath filling backplate with hot and cold tactile sensors, bath control system mains operated, anti-microbial valve, thermal disinfection valve, TMV3 thermostatic mixing valve and blue grab rails. Manufactured in accordance with HBN 00-10, Part C Standards.  
Bath dimensions: 1700 x 700mm  
Grab rails include:  
3 x ligature-resistant straight grab rail 35 x 600mm (RAL 5011)  
**DMPX59B**



**HIGH-SECURITY ASSISTED BATH SETUP - LIGATURE-RESISTANT**  
Accessible bath pack in stainless steel supplied with: white enameled steel bath, high-security bath filling backplate with hot and cold tactile sensors, bath control system mains operated, anti-microbial valve, thermal disinfection valve, TMV3 thermostatic mixing valve and white steel grab rails. Manufactured in accordance with HBN 00-10, Part C Standards.  
Bath dimensions: 1700 x 700mm  
Grab rails include:  
3 x ligature-resistant stainless steel straight grab rail 35 x 600mm  
**DMPX59W**



**45° LIGATURE-RESISTANT BATH SPOUT**  
45° High-security Bath Spout. Ligature-resistant design, complete with unrestricted aerator. Anti-rotation pins. Brushed Stainless Steel finish.  
Separate sensors, control and TMV required.  
**SH07-043** Ligature-resistant bath spout



# Ligature-resistant DOC M packs with thermal disinfection



**DOC M PACK BTW BLUE - LIGATURE-RESISTANT SENSOR OPERATED WITH THERMAL DISINFECTION**

Blue Doc M back to wall ligature-resistant pack supplied with: Ligature-resistant GRP WC with blue top, GRP accessible WC spacer box, concealed plastic cistern kit, WC flushvalve kit with programmable sensor, Ligature-resistant and short projection washbasin with backplate and cold and hot sensors, Anti-microbial two station mains kit, thermal disinfection valve, TMV3 thermostatic mixing valve.

Grab rail kit includes:

- 1 x ligature-resistant hinged support rail 760 x 250mm (RAL 5011)
- 4 x ligature-resistant straight grab rail 35 x 600mm (RAL 5011)
- 1 x ligature-resistant straight grab rail 35 x 450mm (RAL 5011)
- 1 x ligature-resistant backrest with cushion 35 x 240mm (RAL 5011)

**DMPX30B**



**DOC M PACK BTW WHITE - LIGATURE-RESISTANT SENSOR OPERATED WITH THERMAL DISINFECTION**

White Doc M back to wall ligature-resistant pack supplied with: Ligature-resistant GRP WC with blue top, GRP accessible WC spacer box, concealed plastic cistern kit, WC flushvalve kit with programmable sensor, Ligature-resistant and short projection washbasin with backplate and cold and hot sensors, Anti-microbial two station mains kit, thermal disinfection valve, TMV3 thermostatic mixing valve.

Grab rail kit includes:

- 1 x ligature-resistant hinged support rail 760 x 250mm
- 4 x ligature-resistant straight grab rail 35 x 600mm
- 1 x ligature-resistant straight grab rail 35 x 450mm
- 1 x ligature-resistant backrest with cushion 35 x 240mm

**DMPX30W**



**DOC M PACK BTW RED DEMENTIA CARE - WC & RAILS - MANUAL OPERATION WITH THERMAL PURGE**

Red Doc M back to wall pack supplied with: ligature-resistant high-security GRP WC with red top, spacer box, cistern, tactile flushvalve kit, Variuscare barrier-free single washbasin with red coloured stripe for the visually impaired, slotted waste, bottle trap, F5L-Therm barrier-free thermostatic single-lever pillar mixer tap, hygiene unit for F5L tap, battery compartment, TMV3 thermostatic mixing valve, and grab rail kit.

Ligature-resistant grab rail kit includes:

- 1 x ligature-resistant hinged support rail 760 x 250mm (RAL 3020)
- 4 x ligature-resistant straight grab rail 35 x 600mm (RAL 3020)
- 1 x ligature-resistant straight grab rail 35 x 450mm (RAL 3020)
- 1 x ligature-resistant backrest with cushion 35 x 240mm (RAL 3020)

**DMPXF5LHR** Left-hand  
**DMPXF5RHR** Right-hand

**NEW** Hygiene unit allows thermal purge override of the manual tap



# Ligature-resistant grab rail packs



**BLUE LIGATURE-RESISTANT GRAB RAIL PACK**

The blue ligature-resistant grab rail pack is a complete solution designed to provide safety, support, and durability in high-security and healthcare environments. Featuring a robust design and ligature-resistant construction, this pack ensures optimal functionality while prioritising user safety.

Each component is manufactured with precision to resist tampering and ensure a safe environment. The vibrant blue finish is visually appealing and aids visibility, meeting accessibility standards. Perfect for custodial, healthcare, or any settings where safety and hygiene are paramount..

**GRBX803**

Grab rail kit includes:

GRBX141BLR	1 x Ligature-resistant straight grab rail 35 x 450mm
GRBX161BLR	4 x Ligature-resistant straight grab rail 35 x 600mm
GRBX271BLR	1 x Ligature-resistant hinged support rail 760 x 250mm
GRBX312B	1 x Blue backrest cushion
GRBX321BLR	1 x backrest rail 400 x 150mm



**WHITE LIGATURE-RESISTANT WHITE GRAB RAIL PACK**

The white ligature-resistant grab rail pack is a complete solution designed to provide safety, support, and durability in high-security and healthcare environments. Featuring a robust design and ligature-resistant construction, this pack ensures optimal functionality while prioritising user safety.

Each component is manufactured with precision to resist tampering and ensure a safe environment. The vibrant blue finish is visually appealing and aids visibility, meeting accessibility standards. Perfect for custodial, healthcare, or any settings where safety and hygiene are paramount.

**GRBX807**

Grab rail kit includes:

GRBX141WLR	1 x Ligature-resistant straight grab rail 35 x 450mm
GRBX161WLR	4 x Ligature-resistant straight grab rail 35 x 600mm
GRBX271WLR	1 x Ligature-resistant hinged support rail 760 x 250mm
GRBX312W	1 x backrest cushion
GRBX321WLR	1 x backrest rail 400 x 150mm



**RED LIGATURE-RESISTANT GRAB RAIL PACK**

The red ligature-resistant grab rail pack is a complete solution designed to provide safety, support, and durability in high-security and healthcare environments. Featuring a robust design and ligature-resistant construction, this pack ensures optimal functionality while prioritising user safety.

Each component is manufactured with precision to resist tampering and ensure a safe environment. The vibrant blue finish is visually appealing and aids visibility, meeting accessibility standards. Perfect for custodial, healthcare, or any settings where safety and hygiene are paramount.

**GRBX809**

Grab rail kit includes:

GRBX141RLR	1 x Ligature-resistant straight grab rail 35 x 450mm
GRBX161RLR	4 x Ligature-resistant straight grab rail 35 x 600mm
GRBX271RLR	1 x Ligature-resistant hinged support rail 760 x 250mm
GRBX312W	1 x backrest cushion
GRBX321RLR	1 x backrest rail 400 x 150mm








## Accessories

Elevate patient and clinical environments with the KWC DVS range of stainless steel accessories — where durability meets hygiene. Our portfolio is designed for the unique demands of healthcare, combining robust construction with infection-control benefits.

From Medcare soap dispensers for surgical areas and touch-free soap dispensers that minimise contact, to toilet roll holders and waste bins for patient facilities, every product supports cleaner, safer spaces. Whether for wards, theatres, or public washrooms, our accessories deliver long-lasting performance while enhancing both functionality and appearance.

KWC DVS washrooms

# Soap dispensers

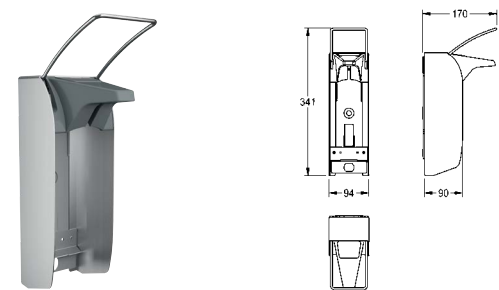


MEDCARE DISPENSER FOR SOAPS AND DISINFECTANTS

MEDCARE dispenser for liquid soaps and disinfectants, for wall mounting, stainless steel housing (dishwasher safe up to 60 °C), satin finished surface, material thickness 1.25 mm, grey plastic outlet cover, for 1000 ml standard Euro-bottles to be provided by the client, with stainless steel operating lever 170 mm, including wall bracket and mounting material.

Dimensions 94 x 341 x 170 mm (W x H x D)

Disposable pump must be ordered separately.

<b>MEDC10S</b>	Medcare dispenser for liquid soaps and disinfectants
<b>CMEDC10T</b>	Drip tray
<b>CMEDC10P</b>	Disposable plastic pump

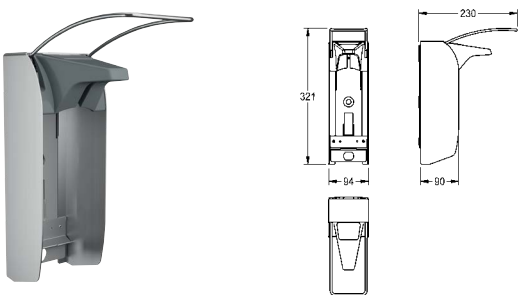


MEDCARE DISPENSER FOR SOAPS AND DISINFECTANTS

MEDCARE dispenser for liquid soaps and disinfectants, for wall mounting, stainless steel housing (dishwasher safe up to 60 °C), satin finished surface, material thickness 1.25 mm, grey plastic outlet cover, for 1000 ml standard Euro-bottles to be provided by the client, with stainless steel operating lever 230 mm, including wall bracket and mounting material.

Dimensions 94 x 321 x 230 mm (W x H x D)

Disposable pump must be ordered separately.

<b>MEDC10L</b>	Waste bin
<b>CMEDC10T</b>	Drip tray
<b>CMEDC10P</b>	Disposable plastic pump

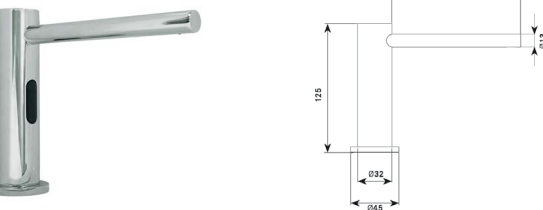


PILLAR SOAP DISPENSER - CHROME

Pillar soap dispenser, manufactured from brass with a chrome finish. Designed with a touch-free operation and minimalistic easy to clean designed. These dispensers are suitable for a wide range of environments including: hospitals, airports, motorway services, food preparation facilities, supermarkets and more. Includes mains PSU & battery unit (batteries not included).

Mains PSU and battery unit can also be used simultaneously in order to enable battery back up feature.

Spout projection: 127mm  
Soap bottle capacity: 1.8 litres

<b>SD01-003</b>	Pillar soap dispenser - Chrome
-----------------	--------------------------------

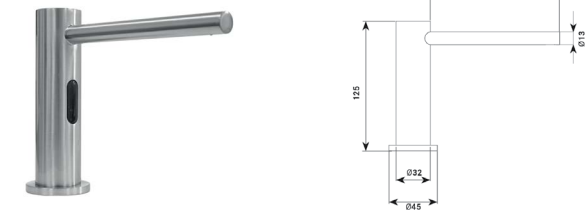

PILLAR SOAP DISPENSER - BRUSHED

Pillar soap dispenser, manufactured from brass with a brushed nickel finish. Designed with a touch-free operation and minimalistic easy to clean designed. These dispensers are suitable for a wide range of environments including: hospitals, airports, motorway services, food preparation facilities, supermarkets and more. Includes mains PSU & battery unit (batteries not included).

Mains PSU and battery unit can also be used simultaneously in order to enable battery back up feature.

Spout projection: 127mm  
Soap bottle capacity: 1.8 litres

<b>SD01-008</b>	Pillar soap dispenser - Brushed
-----------------	---------------------------------



WALL-MOUNTED SOAP DISPENSER - CHROME

Wall-mounted soap dispenser, manufactured from brass with a chrome finish. Designed with a touch-free operation and minimalistic easy to clean designed. These dispensers are suitable for a wide range of environments including: hospitals, airports, motorway services, food preparation facilities, supermarkets and more. Includes mains PSU & battery unit (batteries not included).

Mains PSU and battery unit can also be used simultaneously in order to enable battery back up feature.

Spout projection: 125mm  
Soap bottle capacity: 1.8 litres

<b>SD01-001</b>	Wall-mounted soap dispenser - Chrome
-----------------	--------------------------------------



WALL-MOUNTED SOAP DISPENSER - BRUSHED

Wall-mounted soap dispenser, manufactured from brass with a brushed nickel finish. Designed with a touch-free operation and minimalistic easy to clean designed. These dispensers are suitable for a wide range of environments including: hospitals, airports, motorway services, food preparation facilities, supermarkets and more. Includes mains PSU & battery unit (batteries not included).

Mains PSU and battery unit can also be used simultaneously in order to enable battery back up feature.


Spout projection: 105mm  
Soap bottle capacity: 1.8 litres

<b>SD01-005</b>	Wall-mounted soap dispenser - Brushed
-----------------	---------------------------------------



KWC DVS washrooms

# Soap dispensers

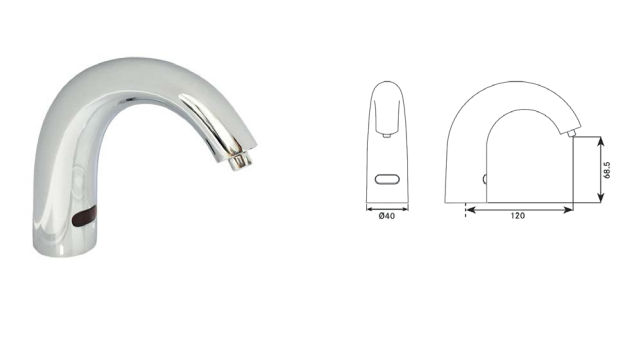


**SWAN SOAP DISPENSER - CHROME**

Deck mounted Swan soap dispenser, manufactured from brass. Touch-free operation and minimalistic easy to clean design. Available in either a chrome or brushed finish, these dispensers are suitable for a wide range of environments including: hospitals, airports, motorway services, food preparation facilities, supermarkets and more. Includes mains PSU & battery unit (batteries not included).

Mains PSU and battery unit can also be used simultaneously in order to enable battery back up feature.

Spout projection: 120mm  
Soap bottle capacity: 1.8 litres

**SD01-002**      Swan soap dispenser - Chrome

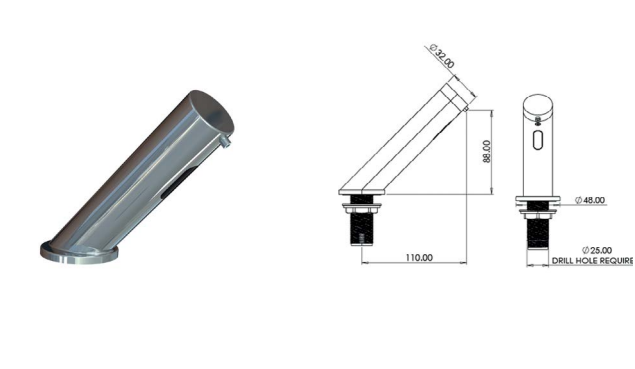


**DECK MOUNTED SOAP DISPENSER - BRUSHED**

Deck mounted A45 soap dispenser, manufactured from brass. Touch-free operation and minimalistic easy to clean design. Available in either a chrome or brushed finish, these dispensers are suitable for a wide range of environments including: hospitals, airports, motorway services, food preparation facilities, supermarkets and more. Includes mains PSU & battery unit (batteries not included).

Mains PSU and battery unit can also be used simultaneously in order to enable battery back up feature.

Spout projection: 127mm  
Soap bottle capacity: 1.8 litres


**SD01-012**      Nickel brush finish  
**SD01-013**      Chrome finish

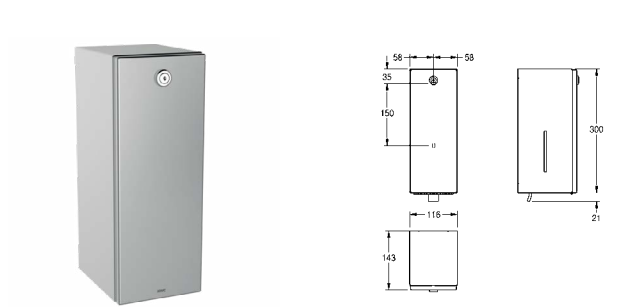

**RODAN SOAP DISPENSER**

Soap dispenser for wall mounting, stainless steel, surface satin finished, material thickness 0.8mm, folded front cover, cylinder lock with KWC standard key, suitable for liquid soaps and lotions, 0.8 liter soap tank, lever to pull, includes stainless steel screws and dowels.

<b>RODX618</b>	Manual	116 x 321 x 143mm
<b>RODX625</b>	Sensor	120 x 296 x 107mm

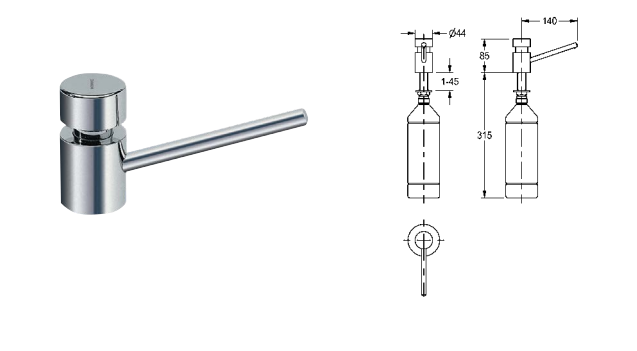


**DECK MOUNTED SOAP DISPENSER**

Soap dispenser for table top mounting into worktops with max. 45mm thickness, high polished chromated brass, requires 22mm drilling hole, 1/2" thread, spout not movable, spout length 140mm, suitable for liquid soaps and lotions, 1 liter soap tank with membrane for pressure balance, filled from above.

With standard body lenght (85mm)  
Dimensions: 44 x 400 x 162mm

**SD80**      Deck mounted soap dispenser

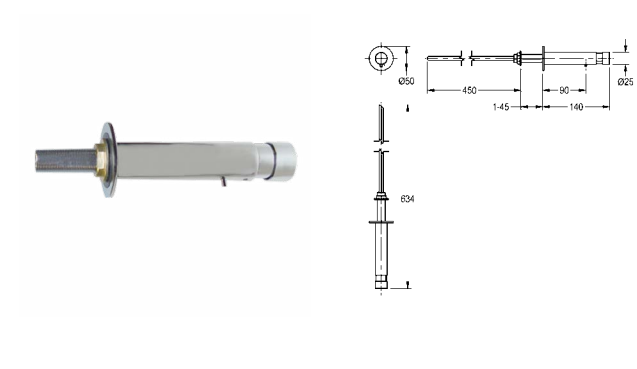


**WALL MOUNTED SOAP DISPENSER**

Soap dispenser for wall mounting and re-filling from Serviceroom behind the wall, high polished chromated brass, requires 18mm drilling hole, 3/8" thread, spout not movable, suitable for liquid soaps and lotions, without soap tank (can be directly connected to soap can), for filling from behind the wall.

Dimensions 50 x 50 x 634mm

**SD110**      Wall-mounted soap dispenser

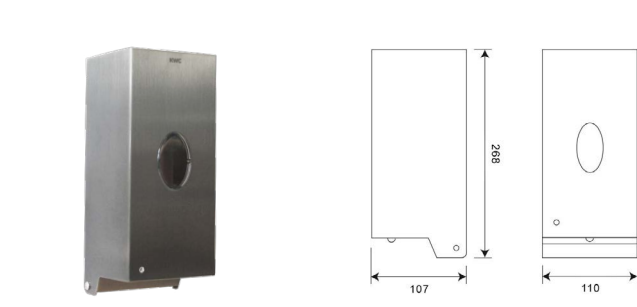

**DARTMOUTH SOAP DISPENSER - STEEL**

Dartmouth touch-free soap dispenser for wall mounting, manufactured from grade 304 stainless steel with a satin finish, inspection window on front, infrared sensor activity for non-touch operation, LED display shows battery status, requires 3 pieces C Cell Alkaline (DC 4.5V) batteries , suitable for liquid soap and lotions, includes 800 ml refill tank, dispenses 1 - 1.5ml depending on soap, includes mounting materials and key for lockable front panel.


Dimensions: 110 x 268 x 107mm (w x h x d)

**AC00-030**      Stainless steel satin finish


**Complimentary Accessories:**

**AT10-045**      Stainless Dartmouth hand dryer


# Toilet roll holders and waste bins




**RODAN DOUBLE TOILET ROLL HOLDER**  
Rodan wall-mounted double toilet roll holder. Manufactured from 0.8mm thick grade 1.4301 (304) stainless steel with a satin polish finish with a flat cover. Suitable for two rolls with a maximum diameter of 120mm each. Includes spindles, the top roll is concealed until the first roll has been finished. Access for replacements using the cylinder lock with Franke standard key. Fixings are included.  
Dimensions 144 x 301 x 138mm  
**RODX672** Rodan double toilet roll holder




**RODAN TOILET ROLL HOLDER**  
Toilet roll holder for wall mounting, stainless steel, surface satin finished, material thickness 0.8mm, folding cover, for 1 roll with max. diameter 130mm, includes stainless steel screws and dowels.  
Dimensions: 135 x 130 x 25mm  
**RODX678** Rodan toilet roll holder




**JUMBO TOILET ROLL HOLDER**  
Chronos 350mm diameter wall-mounted jumbo toilet roll holder. Manufactured from 0.9mm thick grade 1.4301 (304) stainless steel with a satin polish finish. The round casing has an inspection window to the front and an integrated stainless steel tear-off edge. Suitable for rolls with a maximum diameter of 350mm which can be accessed using hexagonal allen key. Fixings are included.  
**CHRX670** 369 x 369 x 108mm  
**CHRX669** 269 x 269 x 116mm



**RODAN WALL-MOUNTED 18 LITRE OPEN TOP WASTE BIN**  
Manufactured from 0.8mm thick grade 1.4301 (304) stainless steel with a satin polish finish and self-closing waste flap. Holds approximately 18 litres. Mounting bracket and fixings are included.  
Capacity: 18 litre waste bin  
Mounting: Wall-mounted  
Dimensions: 275 x 460 x 177mm  
**RODX605S** Rodan wall-mounted 18 litre open top waste bin



**RODAN WALL-MOUNTED 23 LITRE OPEN TOP WASTE BIN**  
Manufactured from 0.8mm thick grade 1.4301 (304) stainless steel with a satin polish finish and self-closing waste flap. Holds approximately 23 litres. Mounting bracket and fixings are included.  
Capacity: 23 litre waste bin  
Mounting: Wall-mounted  
Dimensions: 355 x 460 x 168mm  
**RODX605** Waste bin  
**E-RODX605N** Waste bin bag holder





**RODAN WALL-MOUNTED 60 LITRE OPEN TOP WASTE BIN**  
Manufactured from 0.8mm thick grade 1.4301 (304) stainless steel with a satin polish finish and self-closing waste flap. Holds approximately 60 litres. Mounting bracket and fixings are included.  
Capacity: 60 litre waste bin  
Mounting: Wall-mounted  
Dimensions: 480 x 620 x 210mm  
**RODX607** Open top waste bin  
**RODX608** Self-closing lid





KWC DVS washrooms

# Ligature-resistant showers

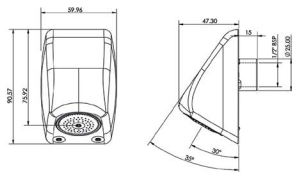

**ANTI-MICROBIAL SHOWERHEAD**

Anti-microbial showerhead manufactured from brass with a chrome finished cover. Supplied with removable waterway that is manufactured in four different colours with anti-microbial Biomaster silver ion technology. The ligature-resistant heads also feature a one-piece anti-microbial ABS outlet.

Requires sensor and station kit to operate  
Additional TMV3 required  
Dimensions: 60 x 90 x 47mm

**SH07-095** Anti-microbial showerhead  
**Complimentary accessories:**  
**SH00-070** Replacement Coloured Waterways (Set of 4)





**HIGH-SECURITY SHOWERHEAD WITH DETACHABLE HOSE CONNECTION**

High-security showerhead with detachable hose connection. The SH07-084 is intended for installations where everything except the showerhead and sensor are concealed behind a wall or panel. This product can be utilised on its own or as part of a shower pairing with the SH07-040. This showerhead can be used in conjunction with the KWC DVS shower control system.

Features include: – 316 Stainless steel – easy to install – quick release mechanism for ease of connection and disconnection of hose and handset (hose & handset Included) – Ideal for areas where ligature resistance is required – wall-mounted – perfect for assisted showering areas

Supplied with hose and showerhead  
Additional TMV3 required  
Sensor and station kit required

**SH07-084** High-security showerhead

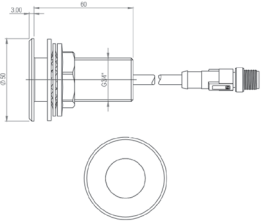



**STAINLESS STEEL PROGRAMMABLE SHOWER SENSOR**

The NEW wall Mounted Programmable Sensor is to be used in conjunction with the handheld programmer (AC01-001). The programmer will allow quick and easy adjustment of settings including: run-on time, range, purge and more. Real time data can be uploaded from the programmer via the USB port to allow accurate monitoring of water efficiency. Available in stainless steel as standard or PVD coated in a choice of black or gold, please get in touch to enquire about coloured options.

Station kit required  
Dimensions: 50 x 50 x 60mm

**AC02-021** Programmable sensor  
**Mandatory accessories:**  
**AT00-221** Station kit  
**AC17-047** TMV3

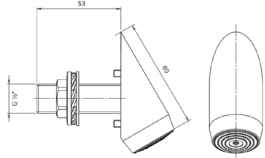

**HIGH-SECURITY SHOWERHEAD – 30°**

30° high-security showerhead with 4 ring shower rose. Manufactured from 316 stainless steel with a brushed finish. Ligature-resistant design, with a tamper-proof security locking screw. Anti-rotation pins.

Additional TMV3 required  
Sensor and station kit required

**SH07-040** High-security showerhead – 30°  
**Complimentary accessories:**  
**SH07-041** Square fixing plate





**FLUSH MOUNTED CEILING SHOWERHEAD**

An Aesthetically pleasing take on Ceiling Height Showerheads whilst maintaining Ligature & Vandal Resistant Design. Ceiling Height High-Security Showerhead with a One-Piece Anti-Microbial ABS outlet. Ligature-resistant design, with a tamper-proof security locking screw. Brushed Stainless Steel finish.

Additional TMV3 required  
Sensor and station kit required

**SH07-047** Flush mounted ceiling showerhead





**LIGATURE-RESISTANT TEMPERATURE BLENDING VALVE ADJUSTER**

Temperature blending valve adjuster, manufactured from brass with a chrome finish. Designed to be robust with good aesthetics and therefore suits all applications. Manufactured with a robust construction and tamper-proof design. Easy to install.

Dimensions: 70 x 70mm (W x H)

**SH00-011** Wall thickness compatibility 1.5mm - 22mm  
**SH00-012** Wall thickness compatibility 22mm - 180mm  
**SH00-013** Wall thickness compatibility 180mm - 280mm  
**Mandatory accessories:**  
**AC17-047** TMV3

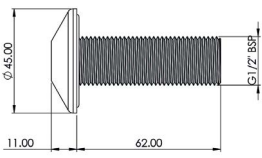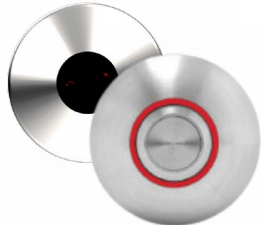

**12V SHOWER TACTILE AND WAVE-ON SENSORS**


Wave-on shower sensor manufactured from stainless steel complete with a 45mm bezel.

Complete with 15 metre cable  
Separate control box required  
Thread diameter: ½" BSP  
Dimensions: 45 x 45 x 73mm

**SH00-003** Wave-on sensor  
**OR**  
**AC02-050** Red tactile switch (hot) (wall mount)  
**Mandatory accessories:**  
**AC17-101** Solenoid valve (1 required per sensor)




# Hydraulic shower controls



**F3S SELF-CLOSING SHOWER FITTING FOR REAR PANEL MOUNTING**

F3S self-closing straight-way valve DN 15 for shower facilities, with remote control for concealed mounting. Especially suitable for facilities at risk of vandalism. Self-closing head part, hydraulically controlled for remote control, piston-free design, self-closing, for connection to pre-mixed hot water or cold water. All-metal construction, visible parts polished chromium-plated. Stainless steel cover plate 190 x 245 x 2 mm for invisible mounting via threaded rods, up to a wall thickness of 50 to 500mm, pre-assembled push-button operation. Flush-mounted box, hydraulic control lines with empty conduit (2 m) and mounting material. Connection and maintenance via service room.

**F3SV2010** Anti-microbial showerhead



**F3S SELF-CLOSING SHOWER FITTING FOR IN-WALL INSTALLATION**

F3S self-closing straight-way valve DN 15 as finished installation kit for in-wall installation in basic installation kit, for shower facilities. Especially suitable for facilities at risk of vandalism. Self-closing functional part, hydraulically controlled, piston-free design, self-closing, continuously adjustable flow duration. For connection to pre-mixed hot water or cold water. Housing including shuttle valve seat, pressure cap with safety screws, visible parts, polished chromium-plated brass. Stainless steel cover plate 190 x 245 x 2 mm, mounting from the front with safety screws and rosette. Depth adjustability 20 mm


**F3SV2011** Self-closing shower fitting for in-wall installation

**Mandatory accessories:**

**F5BV2002** R5 system box for in-wall valves

**Optional accessories**

**AQRM900** Extension set for depth compensation until 33mm



**F5S-MIX SELF-CLOSING SHOWER MIXER FOR IN-WALL INSTALLATION**

F5S-Mix self-closing single mixer DN 15 as finished installation kit for in-wall installation in basic installation kit, for shower facilities. Especially suitable for facilities at risk of vandalism. FRAMIC self-closing mixer cartridge, hydraulically controlled, low-maintenance and stagnation-free, with ceramic disc technology, self-closing, flow pressure-independent due to medium separated design. Stepless adjustment of flow duration. With adjustable, turn-proof temperature stop. For connection to hot and cold water. All-metal construction, visible parts polished chromium-plated. Stainless steel cover plate 190 x 245 x 2 mm. Mounting from the front with safety screws, chromium-plated rosette, backflow preventer and strainers. Depth adjustability 20mm.

**F5SM2013** Self-closing shower mixer for in-wall installation

**Mandatory accessories:**

**F5BX2001** R5 system box for in-wall mixer

**Optional accessories**

**ACSM2001** Extension set for 25 mm depth compensation




INFORM Outlet

INFORM Outlet showers with remote monitoring and control

Elevate your showers to the pinnacle of safety and effortless control with our stainless-steel shower towers featuring the INFORM enabled shower head.

This innovative head boasts an advanced antimicrobial design, promoting hygiene and peace of mind. Integrated intelligent thermistors seamlessly connect with INFORM, providing real-time temperature monitoring, usage data, and customisable alarms.



INFORM OUTLET CEILING HEIGHT SHOWER TOWER - TACTILE

INFORM Outlet Ceiling height shower tower, manufactured from 316 stainless steel with a brushed finish. Features an anti-microbial outlet and in-built intelligent thermistors which connect to our INFORM system. Remotely monitor temperatures, control the outlet, and collate usage data. Ligature-resistant design with concealed pipework, and in-built TMV3 for high-security applications. Designed to fit flush against the ceiling. Tactile switch is positioned 1 metre from floor level at standard 2.4metre ceiling height.

Built-in TMV3  
Tactile switch operation  
Dimensions: 200 x 1080 x 70mm  
Available in White

IC04-005	Shower tower
Mandatory accessories:	
IC07-006	INFORM 6 channel control
OR	
IC07-012	INFORM 12 channel control

INFORM enabled; additional parts and subscription required to activate wireless temperature monitoring and using data.



INFORM OUTLET CEILING HEIGHT SHOWER TOWER - SENSOR

INFORM Outlet Ceiling height shower tower, manufactured from 316 stainless steel with a brushed finish. Features an anti-microbial outlet and in-built intelligent thermistors which connect to our INFORM system. Remotely monitor temperatures, control the outlet, and collate usage data. Ligature-resistant design with concealed pipework, and in-built TMV3 for high-security applications. Designed to fit flush against the ceiling. Sensor is positioned 1 metre from floor level at standard 2.4metre ceiling height.

Built-in TMV3  
Sensor operation  
Control box required  
Dimensions: 200 x 1080 x 70  
Available in White

IC04-006	Shower tower
Mandatory accessories:	
IC07-006	INFORM 6 channel control
OR	
IC07-012	INFORM 12 channel control

INFORM enabled; additional parts and subscription required to activate wireless temperature monitoring and using data.

INFORM OUTLET

Shower safety redefined with INFORM technology

INFORM empowers informed action. Should pre-set temperature parameters fall outside safe ranges, the system notifies you, allowing for timely and efficient intervention. This translates to enhanced confidence in your water safety standards.





# Ligature-resistant and high-security showers



**STANDARD SHOWER TOWER**

Standard angled top shower tower, manufactured from 316 stainless steel with a brushed finish. Suitable for high-security applications. Designed with concealed pipework.

Wave-on sensor or tactile switch operation  
Dimensions: 140 x 830 x 70mm  
Available in White

<b>SH01-002</b>	Shower tower - Wave-on
<b>SH01-003</b>	Shower tower - Tactile
<b>Mandatory accessories:</b>	
<b>SH07-001</b>	Shower control system
<b>AC17-047</b>	Thermostatic mixing valve
<b>Complimentary accessories:</b>	
<b>AC17-080</b>	Thermal disinfection valve



**STANDARD SHOWER TOWER - PUSH BUTTON**

Standard angled top shower tower, manufactured from 316 stainless steel with a brushed finish.

Dimensions: 140 x 830 x 70mm  
Available in White

<b>SH01-001</b>	Shower tower
<b>Mandatory accessories:</b>	
<b>AC17-047</b>	Thermostatic mixing valve
<b>Complimentary accessories:</b>	
<b>AC17-080</b>	Thermal disinfection valve




**CEILING HEIGHT SHOWER PROGRAMMABLE SENSOR AND TMV3 - MAINS**

Ceiling height shower tower, manufactured from 316 stainless steel with a brushed finish. Suitable for high-security applications. Ligature-resistant design with concealed pipework, and in-built TMV3 for high-security applications. Fully programmable using the handheld remote. Functions include adjustable run on times, adjustable range, hygiene purge, lock-outs and more.

Built-in TMV3  
Sensor operation  
Dimensions: 200 x 1080 x 70mm  
Available in White

<b>SH04-061</b>	Shower tower
<b>Mandatory accessories:</b>	
<b>AT00-221</b>	Anti-microbial single station kit

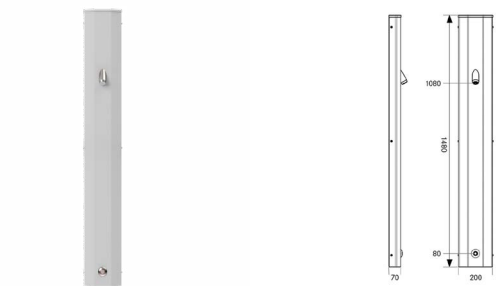

**CEILING HEIGHT SHOWER TOWER TMV3 - MAINS**

Ceiling height shower tower, manufactured from 316 stainless steel with a brushed finish. Suitable for high-security applications. Ligature-resistant design with concealed pipework, and in-built TMV3 for high-security applications. Designed to fit flush against the ceiling. Control is positioned 1 metre from floor level at standard 2.4metre ceiling height.

Built-in TMV3  
Tactile or sensor operation  
Dimensions: 200 x 1080 x 70mm  
Available in White

<b>SH01-005</b>	Tactile ceiling height shower tower
<b>SH01-006</b>	Sensor ceiling height shower tower
<b>Mandatory accessories:</b>	
<b>SH07-001</b>	Shower control system
<b>Complimentary accessories:</b>	
<b>AC17-080</b>	Thermal disinfection valve




**CEILING HEIGHT SHOWER TOWER - SELF-CLOSING**

Ceiling height shower tower, manufactured from 316 stainless steel with a brushed finish. Ligature-resistant design with concealed pipework, and in-built TMV3 for high-security applications. Designed to fit flush against the ceiling. Push button is positioned 1 metre from floor level at standard 2.4metre ceiling height.

Self-closing - non concussive  
Dimensions: 200 x 1080 x 70  
Available in White

<b>SH01-004</b>	Ceiling height shower tower
<b>Complimentary accessories:</b>	
<b>AC17-080</b>	Thermal disinfection valve

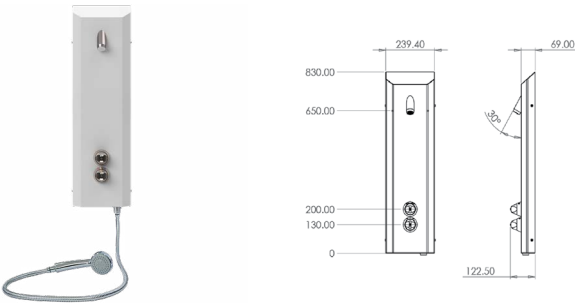


**DUAL OUTLET SHOWER TOWER**

Dual outlet shower tower with detachable hose and handset. Manufactured from 316 stainless steel with a brushed finish. Designed with ligature-resistant controls, pre-plumbed pipework and a dual outlet, so that assisted and unassisted showering can be achieved, making it well suited to high-security healthcare applications. Switching between outlets is quick and easy due to the inbuilt automatic diverter valve.

TMV3 required on hot water supply  
Available in powder coated white upon request  
Dimensions: 239 x 930 x 69mm  
Available in White

<b>SH01-013</b>	Dual outlet shower tower
<b>Mandatory accessories:</b>	
<b>AC17-047</b>	Thermostatic mixing valve
<b>Complimentary accessories:</b>	
<b>AC17-080</b>	Thermal disinfection valve



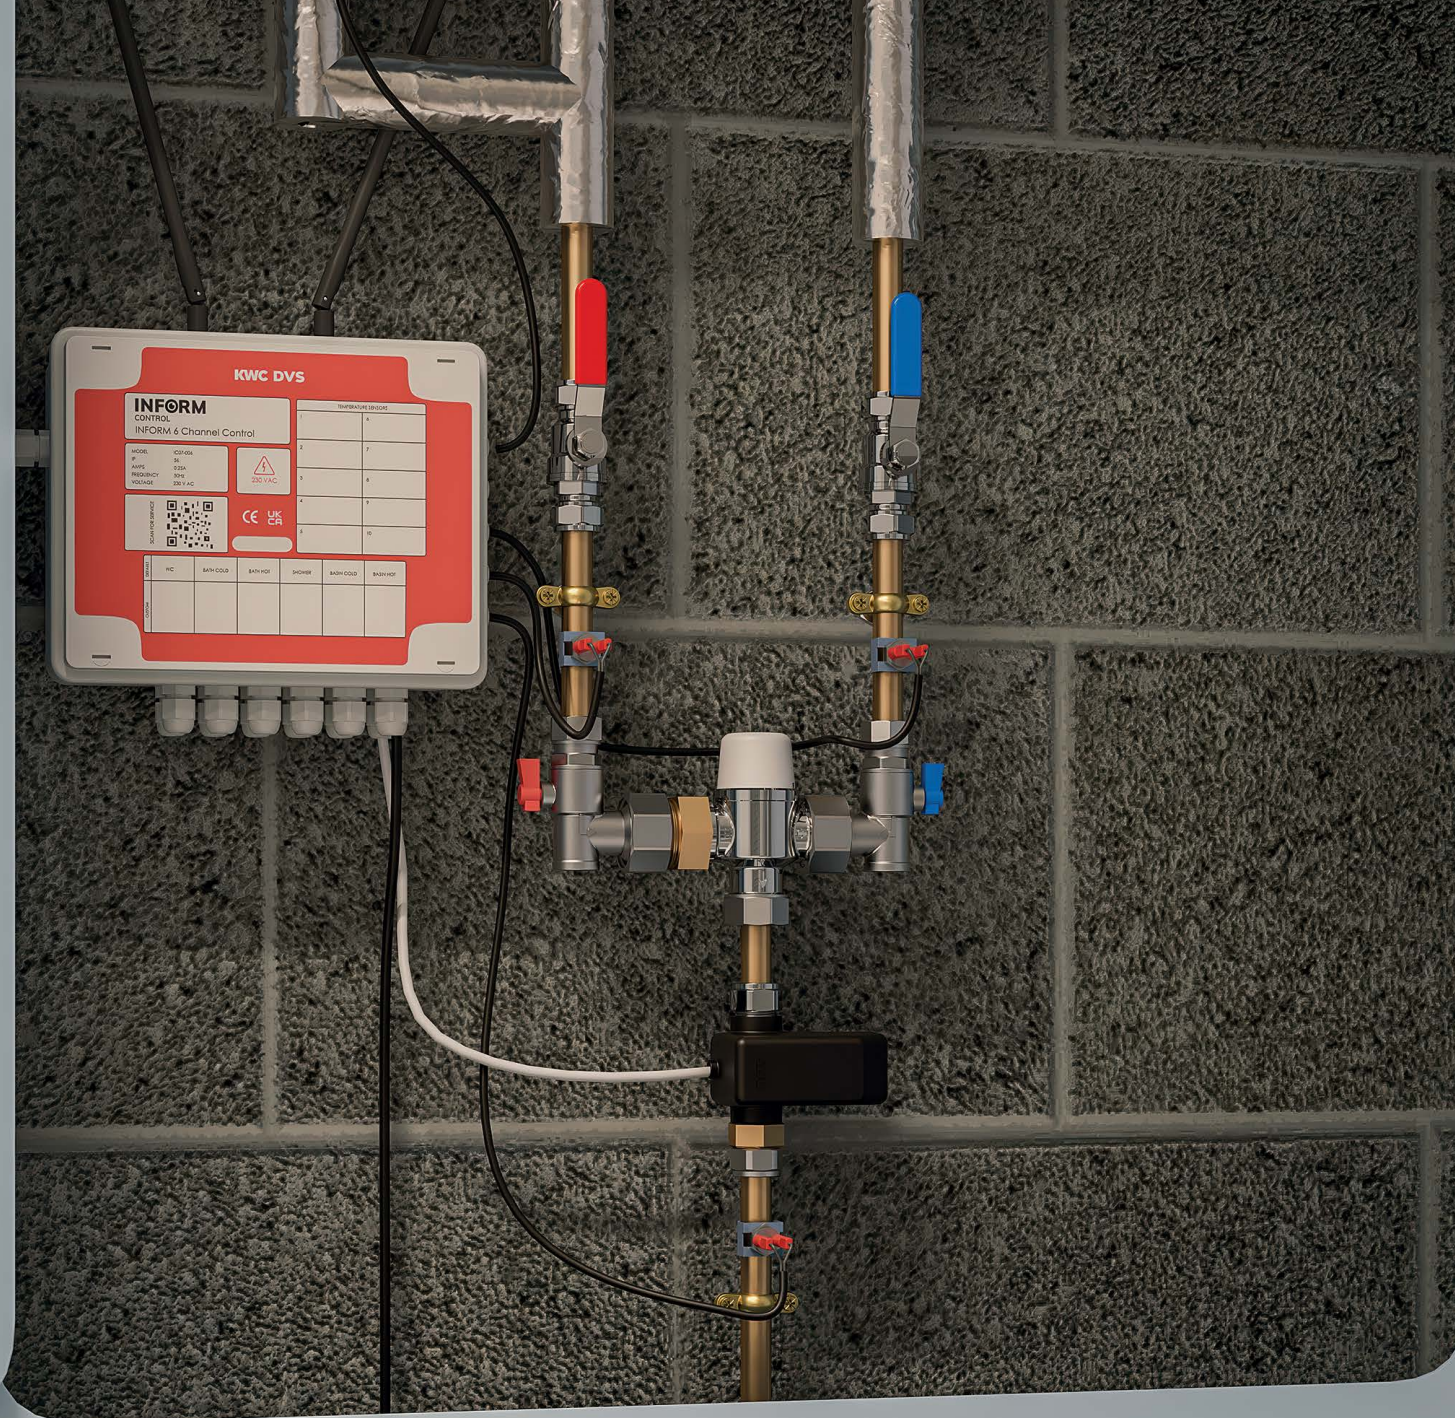

## Controls

In healthcare settings, precise water control is essential for safety, efficiency, and resource management.

KWC DVS offers an advanced range of control boxes and sensors designed to simplify the adjustment of taps, urinals, WCs, baths, and showers. Paired with our programmable remote, these systems allow for room-specific programming and customised water schedules, tailored to individual patient needs — enhancing both user experience and operational control.

Our INFORM system provides intelligent management of power, water, and lighting across healthcare washrooms. With features like adjustable run times, usage monitoring, delayed reactivation, and lockout functionality, it supports effective water conservation while maintaining safety and hygiene standards.







Step 1

# Choose your control box

Discover the ultimate in washroom safety by configuring your ideal en-suite solution from our range of advanced control options. We have an array of options to choose from, including the state-of-the-art INFORM system, which provides complete remote control, temperature monitoring and usage data. We also offer standard control boxes that are designed to minimise installation costs while still delivering an intuitive and efficient setup.

These control boxes can be easily customised to suit your unique requirements by selecting appropriate sensors from our extensive collection. With our range of options, you can be assured that your washroom puts patient safety at the forefront of your design. Browse through our pages and select the best control box and sensors that fit your needs and preferences.



### 6 CHANNEL WASHROOM CONTROL BOX

External control of 1 room couldn't be easier than with the multi-channel control system. The control box has been designed to provide a fully programmable solution tailored to a user's specific needs in all mental healthcare and high-security environments. And with the addition of the Key switch, you can isolate the water supply when necessary.



Cost-saving solution, one box controls two ensuite  
5 independent outlets & 1 flush valves  
Control various outlets - basins, taps, showers, baths, and WCs  
Programmed and maintained via the handheld programmer

Dimensions: 250 x 210 x 91mm

**VR07-026** 6 channel washroom control box

**Complimentary accessory:**

**AC01-001** Handheld programmer

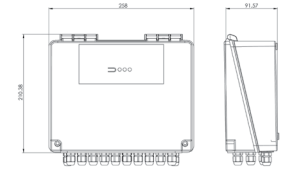

### 12 CHANNEL WASHROOM CONTROL BOX

External control of 2 rooms couldn't be easier than with the multi-channel control system. The control box has been designed to provide a fully programmable solution tailored to a user's specific needs in all mental healthcare and high-security environments. And with the addition of the Key switch, you can isolate the water supply when necessary.



Cost-saving solution, one box controls two ensuite  
10 independent outlets & 2 flush valves  
Control various outlets - basins, taps, showers, baths, and WCs  
Programmed and maintained via the handheld programmer

Dimensions: 250 x 210 x 91mm

**VR07-020** 12 channel washroom control box

**Complimentary accessory:**

**AC01-001** Handheld programmer

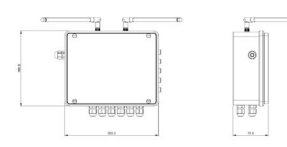

### INFORM 6 CHANNEL CONTROL BOX

Following the established VR07-020 Multi-Channel Control box the Inform 6 Channel Control box gives the option of unprecedented levels of control and enhanced user options including: Remote wireless control of valves, temperature monitoring, remote or on site programming, valve counts, valve opening and closing timestamps, timed hygiene purges and identification of infrequently used outlets. All events are monitored, verified and form part of the extensive range of management information available via the Inform platform 24/7. In addition, user friendly, editable alarms can be set to aid compliance.

In addition INFORM can provide verification that hot taps are  $\geq 50^{\circ}\text{C}$  ( $55^{\circ}\text{C}$  in healthcare premises) and cold taps are below  $20^{\circ}\text{C}$  within the times required by HSG274 Part 2.

When used with the CMVL8 there are the additional functions of Thermal purges and TMV cold water isolation checks.

Suitable for use with 12 volts sensors

**IC07-006** 6 channel control box

To enable all functions an Inform subscription will be required.






Step 2

Choose your sensors or tactile buttons



**12V WC ANTI-VANDAL SENSORS**  
Tactile switch and anti-vandal wave-on sensor manufactured from stainless steel with blue insert. Compatible with a range of KWC DVS products, including: WC flushvalve's, basins and more.  
Complete with 15 metre cable  
Thread diameter: Ø21mm (½" BSP)  
**AC02-043** Blue WC anti-vandal wave-on sensor  
**AC02-049** Blue WC Tactile switch  
**WC01-022** WC flushvalve 1 1/2" (1 required per sensor)  
**WC01-023** WC flushvalve 2" (1 required per sensor)

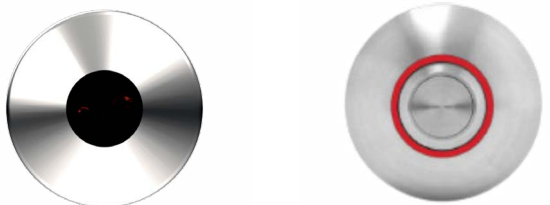

**12V SHOWER SENSORS**  
Wave-on shower sensor manufactured from stainless steel complete with a 45mm bezel.  
Complete with 15 metre cable  
Thread diameter: ½" BSP  
**SH00-003** Wave-on sensor  
**AC02-050** Red tactile switch (hot) (wall mount)  
**AC17-101** Solenoid valve (1 required per sensor)



**12V BATH ANTI-VANDAL SENSORS**  
Anti-vandal wave-on and tactile switches, manufactured from stainless steel with a brushed finish and temperature indication inserts. Suitable for bath filling modules.  
Complete with 15 metre cable  
Thread diameter: Ø21mm (½" BSP)  
**VR00-080** Blue wave-on sensor (cold)  
**VR00-081** Red wave-on sensor (hot)  
**VR00-082** Blue tactile switch (cold))  
**VR00-083** Red tactile switch (hot)  
**AC17-101** Solenoid valve (1 required per sensor)


For use with VR01-111 backplate only




**12V WHB WAVE-ON SENSORS**  
Wave-on sensors manufactured from stainless steel with a brushed finish and temperature indication insert. Capability to adjust settings (control box required).  
Complete with 15 metre cable  
Thread diameter: Ø21mm / Ø16.7mm  
**VR00-003** Blue wave-on sensor (cold) for backplates ONLY  
**VR00-004** Red wave-on sensor (hot) for backplates ONLY  
**AC02-043** Blue anti-vandal wave-on sensor (wall mount)  
**AC02-044** Red anti-vandal wave-on sensor (wall mount)  
**AC17-101** Solenoid valve (1 required per sensor)



**12V WHB TACTILE SWITCHES**  
Tactile switches, manufactured from stainless steel with a brushed finish and temperature indication insert.  
Complete with 15 metre cable  
Thread diameter: Ø21mm (½" BSP)  
**VR00-007** Blue tactile switch (cold) for backplates ONLY  
**VR00-008** Red tactile switch (hot) for backplates ONLY  
**AC02-049** Blue tactile switch (cold) (wall mount)  
**AC02-050** Red tactile switch (hot) (wall mount)  
**AC17-101** Solenoid valve (1 required per sensor)

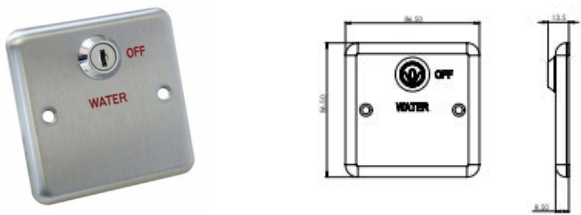

**STAINLESS STEEL KEY SWITCH FOR WALL MOUNTING**  
Key switch for wall mounting, manufactured from stainless steel with a brushed finish. Designed to be used in conjunction with the washroom control box to isolate the water supply when necessary. Supplied with 8 metre cable.  
Dimensions: 86.5 x 86.5 x 13.5mm  
**AC04-016** Water control key switch with 8m cable

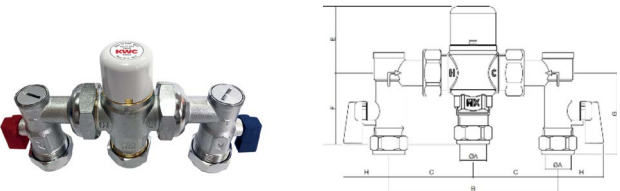

**THERMOSTATIC MIXING VALVE 4IN1 – 15/22MM**  
TMV3 approved thermostatic mixing valve for use in basin, shower, bidet and high pressure bath fill applications (above 1 bar). Designed to control the mixed water outlet temperature to within +/- 2°C regardless of fluctuations in the temperature and pressure of the hot and cold water supplies. The valve will also shut the mixed water outlet instantly in case of hot or cold water failure.  
Factory temperature setting: 41-43°C  
– Temperature setting range: 38-46°C  
– Temperature, hot supply: 52-65°C  
– Temperature, cold supply: 5-20°C  
– Minimum hot to mix differential temperature: 10°C  
– Temperature stability: +/- 2°C  
– Working pressure, static: 16 bar max  
– Working pressure: 0.2-5  
– Maximum pressure loss ratio: 10:1  
– Flow rate, minimum: 4lpm  
– Flow rate @ 1 bar pressure loss: 21 lpm  
**AC17-047** Thermostatic Mixing Valve 4in1 – 15/22mm





## Catering



KWC DVS offers a comprehensive range of commercial catering equipment, expertly crafted from high-grade stainless steel to meet the demanding needs of healthcare facilities.

From hospital kitchens to care home catering areas, our products are designed for hygiene, durability, and performance — standing up to intensive daily use while supporting infection control protocols.

Built to last and easy to maintain, the KWC DVS catering range delivers reliable, professional-grade solutions for busy healthcare catering operations.

KWC DVS washrooms

# Mini Catering Sinks

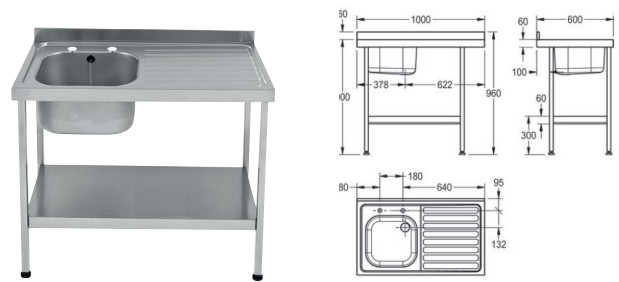



**MINI CATERING SINKS - SINGLE BOWL**

Mini sinks are manufactured from 1.2mm thick austenitic grade stainless steel polished to a satin finish. Single bowl sinks are all supplied with 38mm waste, plug, chain and overflow. Single bowl sinks have two holes drilled at 180mm centre suitable for either 1mm pillar taps or mixer taps. An earthing lug is fitted under the drainer. Stainless steel under frames complete with shelf are supplied in a flat pack form.

L OR R after the code refers to the handing of the drainer.

External: 1000x600mm  
Bowl: 400x400x250mm  
Single Drainer

<b>E20601L/R</b>	Single Bowl and drainer
<b>Complimentary accessories:</b>	
<b>K20670N</b>	Stand & shelf for E20601L/R
<b>F1081N</b>	13mm crosshead high neck pillar taps OR
<b>F1083N</b>	13mm fluted taps

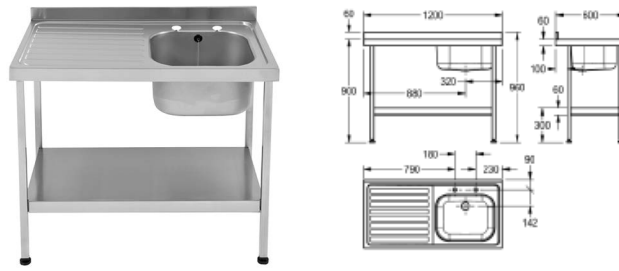



**MINI CATERING SINKS - SINGLE BOWL**

Mini sinks are manufactured from 1.2mm thick austenitic grade stainless steel polished to a satin finish. Single bowl sinks are all supplied with 38mm waste, plug, chain and overflow. Single bowl sinks have two holes drilled at 180mm centre suitable for either 1mm pillar taps or mixer taps. An earthing lug is fitted under the drainer. Stainless steel under frames complete with shelf are supplied in a flat pack form.

L OR R after the code refers to the handing of the drainer.

External: 1200x600mm  
Bowl: 500x400x250mm  
Single Drainer

<b>E20602L/R</b>	Single Bowl and drainer
<b>Complimentary accessories:</b>	
<b>K20671N</b>	Stand & shelf for E20602L/R & E20603L/R
<b>F1081N</b>	13mm crosshead high neck pillar taps OR
<b>F1083N</b>	13mm fluted taps

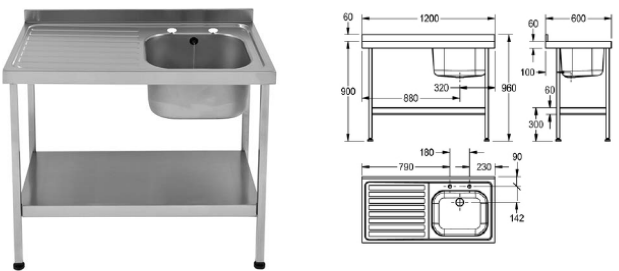


**MINI CATERING SINKS - SINGLE BOWL**

Mini sinks are manufactured from 1.2mm thick austenitic grade stainless steel polished to a satin finish. Single bowl sinks are all supplied with 38mm waste, plug, chain and overflow. Single bowl sinks have two holes drilled at 180mm centre suitable for either 1mm pillar taps or mixer taps. An earthing lug is fitted under the drainer. Stainless steel under frames complete with shelf are supplied in a flat pack form.

L OR R after the code refers to the handing of the drainer.

External: 1200x600mm  
Bowl: 500x400x300mm  
Single Drainer

<b>E20603L/R</b>	Single Bowl and drainer
<b>Complimentary accessories:</b>	
<b>K20671N</b>	Stand & shelf for E20602L/R & E20603L/R
<b>F1081N</b>	13mm crosshead high neck pillar taps OR
<b>F1083N</b>	13mm fluted taps




**MINI CATERING SINKS - DOUBLE DRAINER**

Mini sinks are manufactured from 1.2mm thick austenitic grade stainless steel polished to a satin finish. Single bowl sinks are all supplied with 38mm waste, plug, chain and overflow. Single bowl sinks have two holes drilled at 180mm centre suitable for either 1mm pillar taps or mixer taps. An earthing lug is fitted under the drainer. Stainless steel under frames complete with shelf are supplied in a flat pack form.

L OR R after the code refers to the handing of the drainer.

External: 1500X600mm  
Bowl: 500x400x300mm  
Double Drainer

<b>E20604N</b>	Double drainer
<b>Complimentary accessories:</b>	
<b>K20672N</b>	Stand & shelf for E20604N
<b>F1081N</b>	13mm crosshead high neck pillar taps OR
<b>F1083N</b>	13mm fluted taps




**MINI CATERING SINKS 600MM WIDE - DOUBLE BOWL**

Mini sinks are manufactured from 1.2mm thick austenitic grade stainless steel polished to a satin finish. The larger bowl is fitted with a 38mm waste, plug, chain and overflow and the smaller outer bowl supplied with a 38mm basket strainer waste outlet. They are both drilled for mixer taps only.

An earthing lug is fitted under the drainer. Stainless steel underframes complete with shelf are supplied in a flat pack form. Each leg is fitted with an adjustable foot with a working height of 900mm.

External:1500x600mm  
Bowl: 500x400x250mm and 400x400x250mm  
Single Drainer

<b>E20605L/R</b>	Double drainer
<b>Complimentary accessories:</b>	
<b>K20672N</b>	Stand & Shelf
<b>F1026N</b>	13mm deck pattern mixer tap



**MINI CATERING SINKS 600MM WIDE - DOUBLE BOWL**

Mini sinks are manufactured from 1.2mm thick austenitic grade stainless steel polished to a satin finish. The larger bowl is fitted with a 38mm waste, plug, chain and overflow and the smaller outer bowl supplied with a 38mm basket strainer waste outlet. They are both drilled for mixer taps only.

An earthing lug is fitted under the drainer. Stainless steel underframes complete with shelf are supplied in a flat pack form. Each leg is fitted with an adjustable foot with a working height of 900mm.


External:1500x600mm  
Bowl: 500x400x300mm and 400x400x250mm  
Single Drainer

<b>E20606L/R</b>	Double drainer
<b>Complimentary accessories:</b>	
<b>K20672N</b>	Stand & Shelf
<b>F1026N</b>	13mm deck pattern mixer tap



KWC DVS washrooms

# Catering

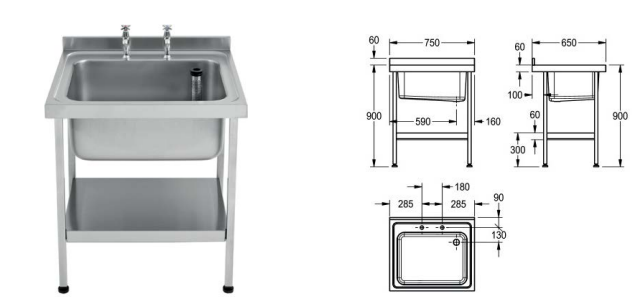


MIDI CATERING SINK 750MM X 650MM

Manufactured from 1.2mm thick, grade 1.4301 (304) stainless steel, with a satin finish. Designed with an earthing lug fitted under the drainer. Stainless steel underframes and shelf (sold separately) are supplied in a flat pack form with easy to read assembly instructions. Each leg is fitted with an adjustable foot (-20, +10mm) with a working height of 900mm. The sink is supplied with 38mm waste and standpipe strainer overflow.

No drainer  
Tap holes: 2 at 180mm centres  
Bowl dimensions: 600 x 450 x 300mm  
Dimensions: 750 x 900 x 650mm

E20608NP	Complete with underframe
Complimentary accessories:	
F1081N	13mm crosshead pillar taps
F1083N	13mm fluted handle pillar taps
F1026N	13mm deck pattern mixer tap

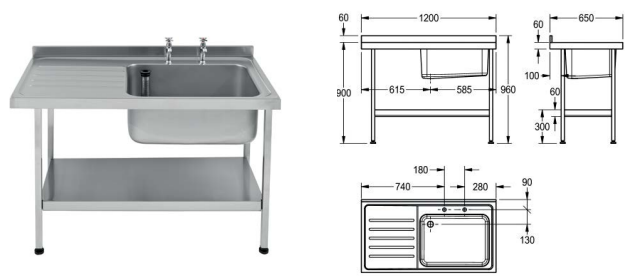


MIDI CATERING SINK 1200MM X 650MM WITH LEFT-HAND DRAINER

Manufactured from 1.2mm thick, grade 1.4301 (304) stainless steel, with a satin finish. Designed with an earthing lug fitted under the drainer. Stainless steel underframes and shelf (sold separately) are supplied in a flat pack form with easy to read assembly instructions. Each leg is fitted with an adjustable foot (-20, +10mm) with a working height of 900mm. The sink is supplied with 38mm waste and standpipe strainer overflow.

Drainer: Left-hand drainer  
Tap holes: 2 at 180mm centres  
Bowl dimensions: 600 x 450 x 300mm  
Dimensions: 1200 x 900 x 650mm

E20610LP	Complete with underframe
E20610LTP	Complete with stand pack and F1083N taps

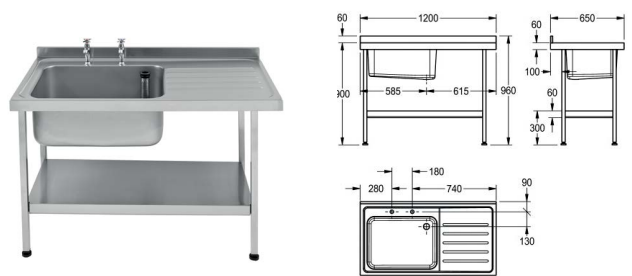


MIDI CATERING SINK 1200MM X 650MM WITH RIGHT-HAND DRAINER

Manufactured from 1.2mm thick, grade 1.4301 (304) stainless steel, with a satin finish. Designed with an earthing lug fitted under the drainer. Stainless steel underframes and shelf (sold separately) are supplied in a flat pack form with easy to read assembly instructions. Each leg is fitted with an adjustable foot (-20, +10mm) with a working height of 900mm. The sink is supplied with 38mm waste and standpipe strainer overflow.

Drainer: Right-hand drainer  
Tap holes: 2 at 180mm centres  
Bowl dimensions: 600 x 450 x 300mm  
Dimensions: 1200 x 900 x 650mm

E20610RP	Complete with underframe
E20610RTP	Complete with stand pack and F1083N taps

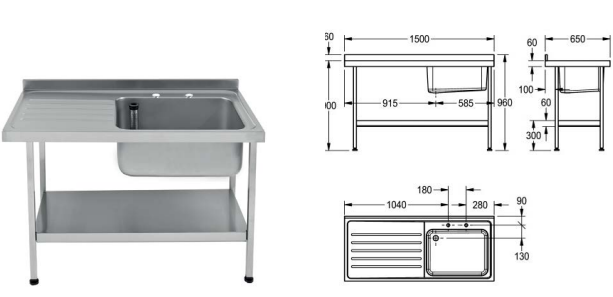


MIDI CATERING SINK 1500MM X 650MM WITH LEFT-HAND DRAINER

Manufactured from 1.2mm thick, grade 1.4301 (304) stainless steel, with a satin finish. Designed with an earthing lug fitted under the drainer. Stainless steel underframes and shelf (sold separately) are supplied in a flat pack form with easy to read assembly instructions. Each leg is fitted with an adjustable foot (-20, +10mm) with a working height of 900mm. The sink is supplied with 38mm waste and standpipe strainer overflow.

Drainer: Left-hand drainer  
Tap holes: 2 at 180mm centres  
Bowl dimensions: 600 x 450 x 300mm  
Dimensions: 1500 x 900 x 650mm

E20612LP	Complete with underframe
E20612LTP	Complete with stand pack and F1083N taps

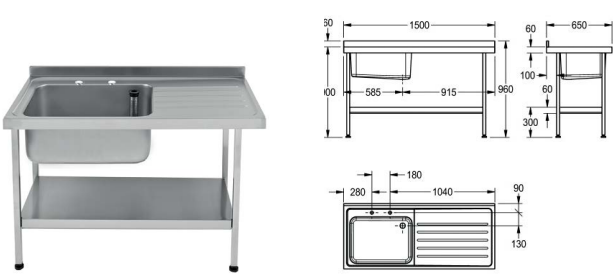


MIDI CATERING SINK 1500MM X 650MM WITH RIGHT-HAND DRAINER

Manufactured from 1.2mm thick, grade 1.4301 (304) stainless steel, with a satin finish. Designed with an earthing lug fitted under the drainer. Stainless steel underframes and shelf (sold separately) are supplied in a flat pack form with easy to read assembly instructions. Each leg is fitted with an adjustable foot (-20, +10mm) with a working height of 900mm. The sink is supplied with 38mm waste and standpipe strainer overflow.

Drainer: Right-hand drainer  
Tap holes: 2 at 180mm centres  
Bowl dimensions: 600 x 450 x 300mm  
Dimensions: 1500 x 900 x 650mm

E20612RP	Complete with underframe
E20612RTP	Complete with stand pack and F1083N taps

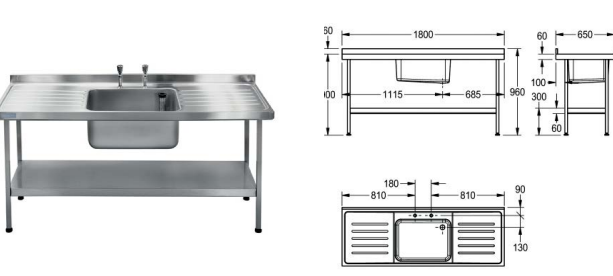

MIDI CATERING SINK 1800MM X 650MM WITH SINGLE BOWL AND DOUBLE DRAINER


Manufactured from 1.2mm thick, grade 1.4301 (304) stainless steel, with a satin finish. Designed with an earthing lug fitted under the drainer. Stainless steel underframes and shelf (sold separately) are supplied in a flat pack form with easy to read assembly instructions. Each leg is fitted with an adjustable foot (-20, +10mm) with a working height of 900mm. The sink is supplied with 38mm waste and standpipe strainer overflow.

Drainer: Double drainer  
Tap holes: 2 at 180mm centres  
Bowl dimensions: 600 x 450 x 300mm  
Dimensions: 1800 x 900 x 650mm

E20614DP	Complete with underframe
E20614DTP	Complete with stand pack and F1083N taps

KWC DVS washrooms

# Catering




**MIDI CATERING SINK 1800MM X 650MM WITH LEFT-HAND DRAINER**

Manufactured from 1.2mm thick, grade 1.4301 (304) stainless steel, with a satin finish. Designed with an earthing lug fitted under the drainer. Stainless steel underframes and shelf are supplied in a flat pack form with easy to read assembly instructions. Each leg is fitted with an adjustable foot (-20, +10mm) with a working height of 900mm. The sink is supplied with 38mm waste and standpipe strainer overflow.

Drainer: Left-hand drainer  
Bowl dimensions: 600 x 450 x 300mm  
Dimensions: 1800 x 650mm

**E20616LP** Complete with underframe  
**E20616LTP** Complete with stand pack and F1083N taps




**MIDI CATERING SINK 1800MM X 650MM WITH RIGHT-HAND DRAINER**

Manufactured from 1.2mm thick, grade 1.4301 (304) stainless steel, with a satin finish. Designed with an earthing lug fitted under the drainer. Stainless steel underframes and shelf are supplied in a flat pack form with easy to read assembly instructions. Each leg is fitted with an adjustable foot (-20, +10mm) with a working height of 900mm. The sink is supplied with 38mm waste and standpipe strainer overflow.

Drainer: Right-hand drainer  
Bowl dimensions: 600 x 450 x 300mm  
Dimensions: 1800 x 650mm

**E20616RP** Complete with underframe  
**E20616RTP** Complete with stand pack and F1083N taps




**MIDI CATERING SINK 2400MM X 650MM WITH DOUBLE DRAINER**

Manufactured from 1.2mm thick, grade 1.4301 (304) stainless steel, with a satin finish. Designed with an earthing lug fitted under the drainer. Stainless steel underframes and shelf (sold separately) are supplied in a flat pack form with easy to read assembly instructions. Each leg is fitted with an adjustable foot (-20, +10mm) with a working height of 900mm. The sink is supplied with 38mm waste and standpipe strainer overflow.

Drainer: Double drainer  
Bowl dimensions: 600 x 450 x 300mm  
Dimensions: 2400 x 650mm

**E20618DP** Complete with underframe  
**E20618DTP** Complete with stand pack and F1083N taps




**OPTIMA ADRIATIC HIGH NECK LEVER TAPS**

For connecting to hot and cold water. Manufactured from chromium plated brass.

Mounting: Deck mounted  
Spout projection: 93mm

**F1330N**




**CROSSHEAD PILLAR TAPS**

For connecting to hot and cold water. The 13mm basin taps are manufactured from chromium plated brass. Ideal for smaller sinks.

Mounting: Deck mounted  
Spout projection: 75mm

**F1081N**



**DECK PATTERN MIXER OVERHEAD SPRAY**

For connecting to hot and cold water. The pre-rinse overhead sprays are suitable for those locations where there is a need for a thorough rinsing of utensils and crockery in dish-washing areas. The deck pattern mixer overhead spray is designed for tap hole centres of 180mm. Supplied complete with spray valve and 150mm wall bracket. Suitable for temperatures up to 54°C. Manufactured from chromium plated brass.

Mounting: Deck mounted  
Spout projection: 381mm

**F1062**



# KWC DVS

Professional

KWC DVS

+44 (0) 1803 529 021

+44 (0) 1246 458 900

+44 (0) 7976 634 819

[kwcdvssales@kwc-professional.com](mailto:kwcdvssales@kwc-professional.com)

[www.dartvalley.co.uk](http://www.dartvalley.co.uk)



To find out more  
information about our  
washroom solutions  
visit our website



KWC DVS | North: 01246 458900 | South: 01803 529021  
[kwcdvssales@kwc-professional.com](mailto:kwcdvssales@kwc-professional.com) | [www.dartvalley.co.uk](http://www.dartvalley.co.uk)