


DUH hospital disposal unit

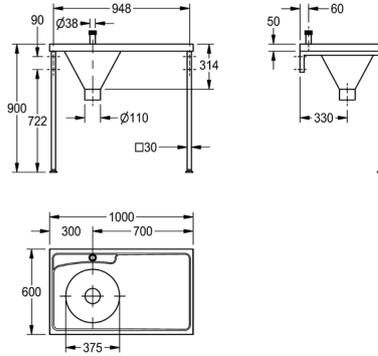

G22025R

Hospital disposal unit

A DUH hospital disposal unit manufactured from 1.2mm thick, grade 1.4301 (304) stainless steel with a satin polish finish. The top is turned down on all four edges and incorporates a wet area recess. Fitted with a sluice hopper at one end supplied with a top inlet. The hopper has a 110mm dia. outlet which can accept a P or S trap, available as an extra. Stainless steel cisterns are available with stainless steel downpipes or plastic cisterns with plastic downpipes are available.

Plastic cisterns have a 9 litres capacity whereas the stainless steel cistern can be 6, 7 or 9 litre capacity and all are fitted with a 13mm HP brass valve, plastic float and CP metal flushing lever handles. The unit should only be fed from a cistern or tank water supply. L or R after the code number refers to the handing of the drainer ie. left or right when facing front of unit.

Technical data

| | |
|---------------------------|----------------------------|
| Bowl - bowl depth | 300mm |
| Bowl finish | Satin finish |
| Bowl width | 375mm |
| Drainer position | Right |
| Drainer or storage | Drainer |
| Gross weight | 12.5kg |
| Material | Stainless steel |
| Material code | 1.4301 chrome nickel steel |
| Material thickness | 1.2mm |
| Minimum flushing capacity | 6 litre |
| Outlet size | DN 100 |
| Overall depth | 600mm |
| Overall height | 300mm |
| Overall width | 1,000mm |
| Surface finish | Satin finished |
| Type of mounting | Wall and floor mounting |
| Net weight | 11.3kg |