


High security assisted bath setup - ligature resistant

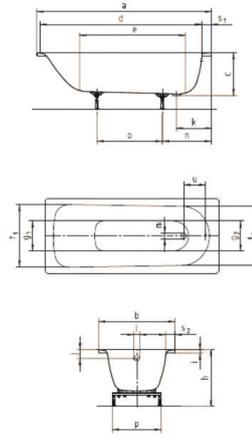

DMPX59B

High security bath setup - blue

Accessible bath pack in stainless steel supplied with: white enameled steel bath, high-security bath filling backplate with hot and cold tactile sensors, bath control system mains operated, anti-microbial valve, thermal disinfection valve, TMV3 thermostatic mixing valve and red grab rails. Manufactured in accordance with HBN 00-10, Part C Standards.

Technical data - Parts

AC17-047	Thermostatic mixing valve 4 in 1
AC17-080	Thermal disinfection valve
AC17-101 (x 2)	Anti-microbial 12V normally closed valve c/w 2 core cable
GRBX161BLR (x 2)	Grab rail 600x250x35 - ligature resistant - blue
SH07-020	Bath control system
VR00-082	Tactile sensor - bath filling module (cold) c/w 15m cable
VR00-083	Tactile sensor - bath filling module (hot) c/w 15m cable
VR01-111	Safe ensuite bath filling module
VR01-124	1700x700x390mm white bath

Technical data - Bath specifications

External length a	1700mm
External width b	700mm
Depth c	390mm
Internal length (top) d	1530mm
Internal length (bottom) e	1150mm
Internal width (top) f1,f2	55;530mm
Internal width (bottom) g1,g2	390;350mm
Height with feet h	515-535mm
Height of rim	Additional f32mm
Distance to edge of overflow hole k	310mm
Diameter of drain hole l	52mm
Diameter of overflow hole m	52mm
Distance foot end of tub edge to centre of base n	450mm
Distance between the feet o	740mm
Max. width of feet p	380mm
Width of rim (foot end; lengthwise) s1;s2	85;75mm
Distance between centre holes u	212mm
Water volume	156L
Anti-slip	Yes