

## HIGH SECURITY ASSISTED BATH SETUP - LIGATURE RESISTANT - WHITE

Model line: DOC M PACKS



### DMPX59R

HIGH SECURITY ASSISTED BATH SETUP - LIGATURE RESISTANT - WHITE

Accessible bath pack in stainless steel supplied with: white enameled steel bath, high-security bath filling backplate with hot and cold tactile sensors, bath control system mains operated, anti-microbial valve, thermal disinfection valve, TMV3 thermostatic mixing valve and red grab rails. Manufactured in accordance with HBN 00-10, Part C Standards




### Technical data

#### DMPX59B parts:

AC17-047	Thermostatic Mixing Valve 4 in 1
AC17-080	Thermal Disinfection Valve
AC17-101 (x 2)	Anti-Microbial 12V Normally Closed Valve c/w 2 Core Cable
GRBX161WLR (x 2)	Grab Rail 600x250x35 - Ligature Resistant - White
SH07-020	Bath Control System
VR00-082	Tactile Sensor - Bath Filling Module (Cold) c/w 15m Cable
VR00-083	Tactile Sensor - Bath Filling Module (Hot) c/w 15m Cable
VR01-111	Safe En Suite Bath Filling Module
VR01-124	1700x700x390mm White Bath

#### Bath specifications:

External length a	1700mm
External width b	700mm
Depth c	390mm
Internal length (top) d	1530 mm
Internal length (bottom) e	1150 mm
Internal width (top) f1; f2	55; 530 mm
Internal width (bottom) g1; g2	390; 350 mm
Height with feet h	515-535 mm
Height of rim	Additional f32 mm
Distance to edge of overflow hole k	310mm
Diameter of drain hole l	52mm
Diameter of overflow hole m	52mm
Distance foot end of tub edge to centre of base n	450mm
Distance between the feet o	740mm
Max. width of feet p	380mm
Width of rim (foot end; lengthwise) s1;s2	85; 75mm
Distance between centre holes u	212mm
Water volume	156L
Anti-slip	Yes

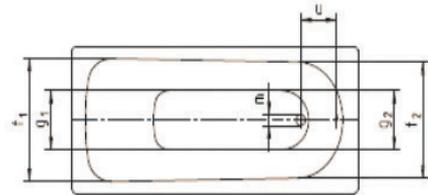

ALL DIMENSIONS IN MM  
UNLESS STATED OTHERWISE