

# WM Programmable Tap Sensor

## AC10-031




The WM Programmable tap sensor. 316 Stainless Steel. Adjustable settings include; run-on time, sensor range, purge and more. Compatible with most DVS taps.

### PRODUCT NUMBER

AC10-031

### TECHNICAL DATA

Material	316 Stainless Steel
Surface finish	Rose Gold Brushed
Gross weight	0.2 kg
Operation type	A.I.R (Active Infrared) touch-free
Type of mounting	Wall mounted (Ø27mm drill hole required)
Adjustable settings	
Runtime	2, 5, 10, 15, 20 & 30 Seconds (Default 2 seconds)
Sensor range	1-10 (Default 5)
Wave-on / Wave-off operation	ON/OFF (Default OFF)
Anti Vandal time	30 secs, 1, 2, 4 & 8 mins (Default 1 Minute)
Automatic purge	ON/OFF (Default OFF)
Purge run time	30 secs, 1, 2, 4 & 8 mins (Default 1 Minute)
Lock outs	OFF, 4, 6, 8 & 10 ops (Default OFF)

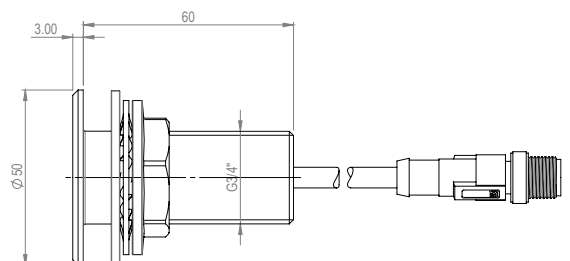

Last updated:  
2021-11-05, Dart Valley Systems