


KWC

Tap control system

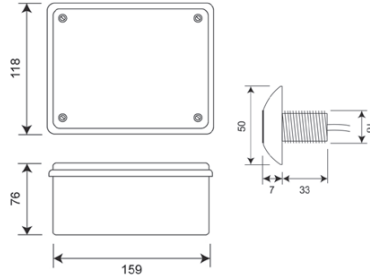

AT07-010

Tap control system - 1 station kit

One or two station tap control system kit complete with wave on sensors. Designed to be wall mounted. Mains operated 230V. Ability to control valves for 1 or 2 spouts, or hot and cold valves for single spout. Manually adjustable setting options include run on times, hygiene purges and lock outs.

Technical data

Material	ABS
Gross weight	0.7kg
Type of mounting	Wall mounted
Power source	Mains
Voltage	230V a.c.
Sensor voltage	5V DC
Valve voltage	12V DC
Valve power	3W normally closed
Control inputs	Sensor 1, sensor 2
Control outputs	Valve 1, valve 2
Control configuration	Controls valves for 1 or 2 spouts, or hot and cold valves for single spout
Operation type	Wave-on or tactile sensor (sold separately)
IP rating	54
Current	0.055A
Frequency	50Hz
Anti vandal time	Run +10s
Automatic purge	ON/OFF, 3, 6, 12, 24, 36, 48 Hours
Settings	
Adjustable timing	6 - 20 secs (Default 6 secs)
Purge facility	Yes (ON / OFF) Default OFF
Operations lock out	Yes (ON / OFF)
Kit contents	
AT07-001	Tap control system for 1 or 2 taps
AC17-009	Plastic valve 12v DC - 12.7mm orifice
AC02-013	50mm chrome wave on sensor pack C/W 3m cable