DELABIE | DVS

Self-closing pillar mixer

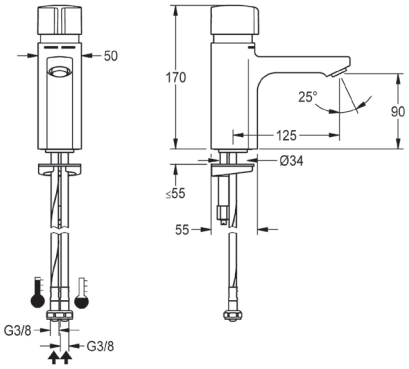

F5SM1001
Self-closing pillar mixer

F5S-Mix self-closing pillar mixer DN 15 as single-mixer tap for sanitary facilities. FRAMIC self-closing mixing cartridge, hydraulically controlled, low-maintenance and stagnation-free, with ceramic disc technology, self-closing, flow pressure-independent due to medium-separated design. Stepless adjustment of flow duration. With adjustable, turn-proof temperature stop. For connection to hot water and cold water via hoses with integrated backflow preventer and strainers.

All-metal construction, high-polished chromium-plated brass. Anti-theft aerator, SLIM design, with integrated flow regulator 5.0 l/min.

Technical data

With backflow preventer	Yes
Depressurised	No
Compatible A3000 open	No
With filter	Yes
Adjustable flow time	Yes
Functional principle	Hydraulic self-closing
Hygiene flushing	No
Diameter nominal	DN 15
Inlet size	G 3/8
Locking mechanism	Top section, ceramic
Material fitting	Brass
Maximum flow time	35 seconds
Minimum flow time	0.5 seconds
Type of mixing	Yes
Pop up waste	No
Spout projection	125mm
Surface finish fitting	Chromed
Surface treatment fitting	Polished
Temperature limit	Yes
Type of mounting	Tap hole
Type of operation	Manual operation
Type of tap	Pillar tap
Water connection	Hose (gland nut)
Thermal disinfection	No
Volume flow rate at 3 bar	0.08 l/s
Accent colour	None