


DELABIE | DVS

High-security basin with high-security spout 2 sensors

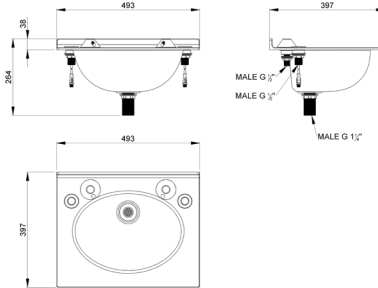

VR01-120

High-security basin

The high-security GRP vanity basin is designed for durability and safety, complete with two deck-mounted, ligature-resistant spouts made from 316 stainless steel and two programmable sensors. The programmable stainless steel sensors allows for customised settings such as sensor range, run-on time, and purge cycles.

This high-security setup is ideal for environments requiring robust, tamper-resistant fixtures that prioritise both safety and functionality.


Technical data

Material	High-performance GRP (Glass-Reinforced Polyester)
Gross weight	6.75kg
Overall dimensions	493 x 264 x 397mm (w x h x d)
Type of mounting	Table top mounted (vanity unit required)
Colour	Light grey (RAL 7040)
Surface finish	High gloss
Ligature resistant	Yes
Number of spouts	2
Number of sensors	2
Type of operation	A.I.R (active infrared) touch free
Run times	2, 5, 10, 15, 20 & 30 seconds (default 2 seconds)
Sensor range	1-10 (default 5)
Wave-on / wave-off operation	On/off (default off)
Anti-vandal time	30 sec, 1, 2, 4 & 8 (default 1 minute)
Automatic purge	On/off (default off)
Purge run time	30 sec, 1, 2, 4 & 8 (default 1 minute)
Lock outs	Off, 4, 6, 8 & 10 ops (default off)
Tap outlets	High-security ligature-resistant spout
Waste outlet	1 ¼" outlet
Waste grid	Ligature-resistant waste
Type of mixing	Additional TMV required
Minimum flow pressure	1 bar
Water connection	Ø½" DZR Brass BSP

DELABIE | DVS


High-security basin with high-security spout 2 sensors

Mandatory accessories



Mandatory accessories

AC02-024
Blue tap sensor



Mandatory accessories

AC02-025
Red tap sensor



Mandatory accessories

AT07-092
Deck mounted spout

Complimentary accessories



Complimentary accessories

VR01-130
Vandal-resistant vanity cabinet



Complimentary accessories

AT00-222
2 station kit



Complimentary accessories

VR01-021
Fixing kit