


## F3S-Mix self-closing wall mounted mixer

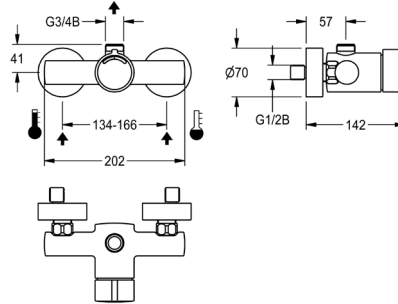

### F3SM2001

F3S-Mix self-closing wall mounted mixer

F3S-Mix self-closing wall-mounted mixer DN 15 as single-mixer for wall mounting, for shower facilities. Self-closing mixing cartridge, hydraulically controlled, piston-free design, self-closing, stepless configuration of flow duration. With adjustable temperature stop. Connects to hot and cold water. Housing with outlet on top, G 3/4 B, for installation of bent outlet or surface-mounted shower pipe, high-polished chromium-plated brass.

With adjustable connections, withbackflow preventer, strainers and screw rosettes.

### Technical data

Calculation flow rate cold water	0.15l/s
Calculation flow rate hot water	0.15l/s
Adjustable flow time	Yes
Functional principle	Hydraulic self closing
Hygiene flushing	No
Diameter nominal	DN 15
Inlet size	G 1/2 B
Locking mechanism	Top section, non ceramic
Material fitting	Brass
Maximum flow time	35 seconds
Minimum flow time	5 seconds
Type of mixing	Yes
Protective shutdown	No
Type of mounting	Wall mounted
Type of operation	Manual operation
Type of shower	Wall fitting
Position of water connection	From backside
Volume flow rate at 3 bar	0.25 l/s
Temperature limit	Yes
Thermal disinfection	No